

TXS 2150/8x1

TXS215008FFC000

Transmit Router (950-2150 MHz)

Quintech TXS 2150

General Description:

The **TXS215008FFC000** provides eight 2-way splitters and a single 8x1 router in a single 3 RU enclosure. One of the outputs of each 2-way splitter is accessible through a rear panel mounted "F" type connector to feed fiber optic transmitters. The other output of the 2-way splitter is connected to each of the eight inputs of the 8x1 router. The router output feeds a standby fiber optic transmitter. In the event that one of the eight primary optical links fails, the loss of RF on that failed link is sensed on the receiver end of the link by the RXS215008FFC000. An RS-422 control via the RXS215008FFC000 causes the TXS215008FFC000 router to route the input of the failed link to the standby fiber link. A rear panel mounted RJ45 connector provides an Ethernet port for the M&C monitoring of the switch position. Dual AC inputs and dual internal power supplies are included for power redundancy.


Note: All unused RF output ports must have 75 Ω terminations.

Specifications:

Frequency:	950-2150 MHz
Impedance:	75 Ω
P1dB:	+12 dBm
Insertion Loss (primary):	4.0 dB \pm 0.5 dB
Insertion Loss (backup):	-3.5 dB \pm 1.5 dB
Frequency Response:	\pm 2.0 dB
Isolation (splitter out to switch out):	50 dB
Return Loss:	12 dB
RF Connectors:	Type-F, 75 Ω
Power Requirements:	100-240 V~, 50/60 Hz
Power Consumption:	11 W
Local Control:	Front panel keypad with LCD
Remote Control:	RS-422
Monitor:	Ethernet
Mechanical:	3 RU (5.25"H x 19"W x 20"D)
Weight:	17 lbs. gross (boxed), 11 lbs. net



Quintech TXS 2150 Front and Rear Panel

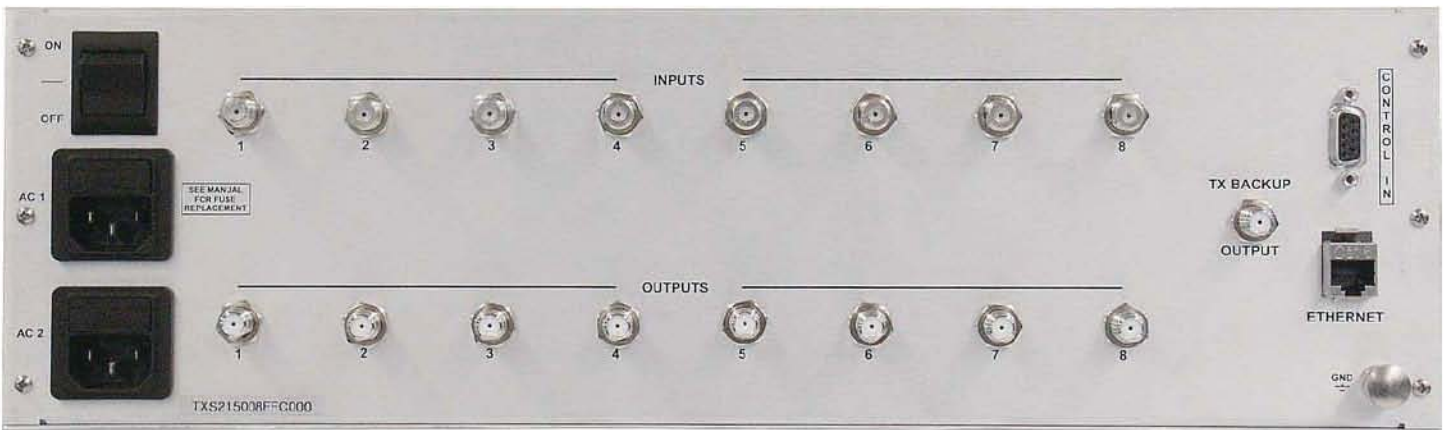

Digisat International Inc.
4195 W. New Haven Ave., Suite 15
Melbourne, FL 32904
USA
+1-321-676-5250
Email: sales@digisat.org
<http://www.digisat.org>