

# CDM-625A-EN Advanced Satellite Modem

Satellite Modems



## Overview

The CDM-625A-EN Advanced Satellite Modem builds on our legacy of providing the most efficient satellite modems for IP-centric applications that require data encryption. With support for VersaFEC® Forward Error Correction (FEC), the revolutionary DoubleTalk® Carrier-in-Carrier® bandwidth compression, additional rolloffs and advanced packet processing, the CDM-625A-EN provides significant savings under all conditions. This combination of advanced technologies enables multi-dimensional optimization, allowing satellite communications users to:

- Minimize operating expenses (OPEX)
- Maximize throughput without using additional transponder resources
- Maximize availability (margin) without using additional transponder resources
- Minimize capital expenses (CAPEX) by allowing a smaller BUC/HPA and/or antenna
- Or, a combination to meet specific business needs

## Features

- DoubleTalk Carrier-in-Carrier bandwidth compression
- Carrier-in-Carrier Automatic Power Control
- VersaFEC FEC with Adaptive Coding and Modulation (ACM)
- 5%, 10%, 15%, 20%, 25% and 35% Filter Rolloff
- Packet Processor with header compression, payload compression, advanced Quality of Service (QoS) and Managed Switch Mode with VLAN support
- Integrated 4-port managed Ethernet switch with VLAN and QoS
- Jumbo frame support
- AES Data Encryption for IP traffic (Packet Processor)
- Dual Band Capability: 70/140 MHz and extended L-Band (950 – 2250 MHz) in same unit
- Data Rate: 18 kbps to 25 Mbps
- Symbol Rate: 18 ksps to 12.5 Msps
- Modulation: BPSK, QPSK/OQPSK, 8PSK/8-QAM, 16-QAM
- FEC: Viterbi, Sequential, Concatenated Reed Solomon, TCM, Turbo Product Code (TPC) (IESS-315 Compliant), LDPC Code and VersaFEC (low-latency LDPC)
- Widest Range of data interfaces: 4-port 10/100Base-T Ethernet, EIA-422/530, V.35, G.703 T1, G.703 E1, G.703 T2, G.703 E2, Quad G.703 E1, ASI, LVDS, HSSI
- IEEE 1588v2 Precision Time Protocol
- Sub Mux to multiplex IP/Ethernet traffic with serial or G.703 traffic
- Drop & insert for T1/E1
- Enhanced D&I++ for single T1/E1 & quad E1
- Management: 10/100Base-T Ethernet with SNMP, Distant End SNMP Proxy, HTTP, Telnet and EIA-232/EIA-485
- Carrier ID using MetaCarrier® Technology
- Embedded Distant-end Monitor and Control (EDMAC)
- Automatic Uplink Power Control (AUPC)
- Engineering Service Channel (ESC/ESC++)
- Standard high-stability internal reference ( $\pm 6 \times 10^{-8}$ )
- 5-tap Adaptive Equalizer
- L-Band TX: 10 MHz reference for BUC, FSK communications and optional BUC power supply
- L-Band RX: 10 MHz reference and LNB power supply
- L-Band: Advanced FSK for LPOD M&C
- 1:1 and 1:10 redundancy switches available
- Backwards compatible with CDM-625

## Typical Users

- Mobile Network Operators
- Telecom Operators
- Satellite Service Providers
- Government & Military
- Enterprise
- Offshore

## Common Applications

- Mobile Backhaul
- G.703 Trunking
- IP Trunking
- Offshore & Maritime Communications
- Enterprise
- Communications on-the-Move
- Satellite News Gathering

## Doubletalk Carrier-in-Carrier

DoubleTalk Carrier-in-Carrier, based on patented “Adaptive Cancellation” technology, allows transmit and receive carriers of a duplex link to share the same transponder bandwidth. DoubleTalk Carrier-in-Carrier is complementary to all advances in modem technology, including advanced FEC and modulation techniques. As these technologies approach theoretical limits of power and bandwidth efficiencies, DoubleTalk Carrier-in-Carrier utilizing advanced signal processing techniques provides a new dimension in bandwidth efficiency.

Figure 1 shows the typical full-duplex satellite link, where the two carriers are adjacent to each other.

Figure 2 shows the typical DoubleTalk Carrier-in-Carrier operation, where the two carriers are overlapping, thus sharing the same spectrum.

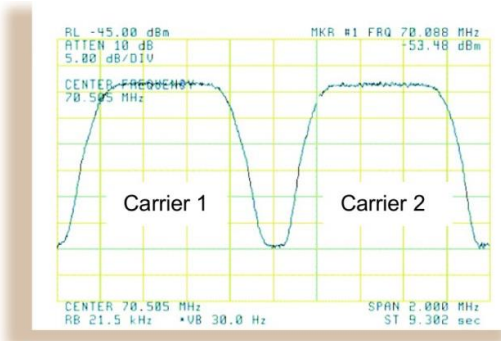


Figure 1

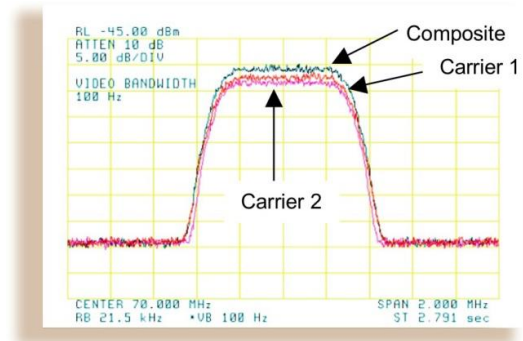


Figure 2

When observed on a spectrum analyzer, only the Composite is visible. Carrier 1 and Carrier 2 are shown in Figure 2 for reference only.

As DoubleTalk Carrier-in-Carrier allows equivalent spectral efficiency using a lower order modulation and/or code rate, it can reduce the power required to close the link thereby reducing CAPEX by allowing a smaller BUC/HPA and/or antenna. Alternatively, DoubleTalk Carrier-in-Carrier can be used to achieve very high spectral efficiencies E.g., DoubleTalk Carrier-in-Carrier when used with 16-QAM approaches the bandwidth efficiency of 256-QAM (8 bps/Hz).

When combined with VersaFEC or LDPC/TPC, it can provide unprecedented savings in transponder bandwidth and power utilization. This allows for its successful deployment in bandwidth-limited and power-limited scenarios, as well as reduction in earth station BUC/HPA power requirements.

Carrier-in-Carrier® is a Registered Trademark of Comtech EF Data  
DoubleTalk® is a Registered Trademark of Raytheon Applied Signal Technology  
VersaFEC® is a Registered Trademark of Comtech EF Data

## Carrier-in-Carrier Automatic Power Control (CnC-APC)

The patent-pending Carrier-in-Carrier Automatic Power Control (CnC-APC) mechanism enables modems on both sides of a CnC link to automatically measure and compensate for rain fade while maintaining the Total Composite Power. In addition to automatically compensating for rain fade, CnC-APC also enables the modems to share link margin, i.e. a modem in clear sky conditions can effectively transfer excess link margin to a distant end modem experiencing fade, thereby further enhancing overall availability.

## VersaFEC Forward Error Correction

CDM-625A-EN offers VersaFEC, a patent-pending system of high-performance LDPC codes designed to provide maximum coding gain while minimizing latency. VersaFEC is designed to support ACM and CCM mode of operation

The Ultra Low Latency (ULL) codes provide even lower latency compared to standard VersaFEC codes.

## Adaptive Coding & Modulation (ACM)

Satellite users have traditionally relied on worst case link margin to overcome rain fade which leads to significant inefficiencies. ACM can provide significant increase in throughput as well as availability. ACM converts the fade margin into increased capacity making it possible to more than double the throughput for Ku-band operation. Even under deep fade, ACM may be able to maintain the link at the lower MODCOD thereby increasing availability. It is tightly integrated with packet processor QoS which allows higher priority, mission critical traffic to be maintained even during fade.

## Low Density Parity Check Codes (LDPC) & Turbo Product Codes (TPC)

CDM-625A-EN offers an integrated LDPC and 2<sup>nd</sup> Generation TPC codec. LDPC is an advanced Forward Error Correction technique capable of providing performance much closer to Shannon limit. The current LDPC implementation can provide 0.7 to 1.2 dB additional coding gain compared to an equivalent TPC code.

In order to take full advantage of the increased coding gain provided by LDPC, Comtech EF Data has developed a patented 8-QAM modulation that allows for acquisition and tracking at much lower Eb/No compared to 8PSK.

## Dual Band Capability

CDM-625A-EN supports 70/140 MHz and extended L-Band (950 – 2250 MHz) capability in the same unit with independently selectable transmit and receive IF. This simplifies sparing and stocking in networks requiring 70/140 MHz and L-Band units.

## 4-Port Managed Ethernet Switch with VLAN & QoS

CDM-625A-EN incorporates a 4-port 10/100Base-T managed Ethernet switch with VLAN capability and priority-based Quality of Service. Access (Native) Mode and Trunk Mode are supported. Traffic can be prioritized using port-based priority or VLAN priority. The modem supports jumbo frames with maximum Ethernet frame size of 2048 bytes.

## Packet Processor

The optional high-performance Packet Processor enables efficient IP networking and transport over satellite with low overhead encapsulation, header compression, payload compression and advance Quality of Service to the CDM-625A-EN. The QoS combined with header and payload compression ensures the highest quality of service with minimal jitter and latency for real-time traffic, priority treatment of mission critical applications and maximum bandwidth efficiency.

Packet processor supports Routed mode as well as Managed Switch Mode of operation. In managed switch mode, it operates as a layer 2 switch with VLAN support, enabling seamless integration with existing infrastructure while providing full optimization including low overhead Streamline Encapsulation, header compression and payload compression and advanced QoS.

### **Header Compression**

The Packet Processor incorporates industry-leading header compression for Ethernet and IP traffic. In managed switch mode, header compression can reduce the 54 byte Ethernet/IP/UDP/RTP header to as little as 1 byte. For TCP/IP, the 54 byte header (including Ethernet) is reduced to as little as 3 bytes. For applications such as VoIP, header compression can provide bandwidth savings exceeding 65%. E.g. the 8 kbps G.729 voice codec requires 31.2 kbps once encapsulated into an Ethernet frame with IP/UDP/RTP. With header compression, the same voice call needs about 9 kbps – a saving of almost 70%. And, bandwidth requirements for typical Web/HTTP traffic can be reduced by 10% or more with TCP/IP header compression.

### **Payload Compression**

The Packet Processor incorporates industry-leading GZIP based payload compression for IP/Ethernet traffic. Implemented in hardware for maximum throughput and efficiency, payload compression can typically reduce the required satellite bandwidth by 30-40%.

### **Streamline Encapsulation (SLE)**

The Packet Processor incorporates Comtech EF Data's patent-pending low overhead Streamline Encapsulation (SLE). SLE can reduce the encapsulation overhead by as much as 65% compared to industry standard HDLC.

### **Advanced Quality of Service (QoS)**

The Packet Processor incorporates multi-level QoS to ensure the highest quality service with minimal jitter and latency for real-time traffic, priority treatment of mission critical applications and maximum bandwidth efficiency. Supported modes are:

- DiffServ – Industry-standard method of providing QoS enabling seamless co-existence in networks that implement DiffServ
- Max/Priority – Provides traffic prioritization with the ability to limit maximum traffic per priority class
- Min/Max – Provides a Committed Information Rate (CIR) to each user defined class of traffic with the ability to allow a higher burstable rate depending on availability

A powerful classifier supports packet classification by Protocol, VLAN ID / range, ToS Byte, Source IP (or subnet), Destination IP (or subnet), Source Port (or Range), Destination Port (or Range) and DSCP (for DiffServ).

## AES Data Encryption

Configurable on a per route basis, the modem supports AES data encryption for transmission security to prevent unauthorized access to data transmitted over the satellite link. AES data encryption is only available for IP traffic processed by the Packet Processor.

## Quad E1 Interface (QDI) with Enhanced D&I++

The CDM-625A-EN supports a Quad E1 interface that can aggregate up to four full or fractional E1s into a single carrier, with very low overhead. This provides significant CAPEX savings by reducing the number of modems and could possibly reduce the BUC/HPA size by eliminating the multi-carrier backoff. A proprietary, closed network drop & insert (D&I++) allows for dropping or inserting any combination of 1 to 31 time slots on each E1. D&I++ is supported for E1-CCS only.

## IP Sub Multiplexer

The IP sub mux allows multiplexing IP/Ethernet traffic with serial or G.703 traffic into a single carrier. This is particularly useful for cellular backhaul when both E1 and IP backhaul is required. This reduces the number of modems and could possibly reduce the BUC/HPA size by eliminating the multi-carrier backoff. The IP sub mux ratio ranges from 9:1 (IP data rate is 9 times that of the serial or G.703 data rate) to as low as 1:59. IP sub mux can also be used to provision an overhead IP channel for management when using non IP/Ethernet traffic interfaces.

## EDMAC & AUPC

The CDM-625A-EN supports EDMAC, EDMAC-2, EDMAC-3 and AUPC. EDMAC/EDMAC-2/EDMAC-3 can be used to monitor and control the distant end of a satellite link using a proprietary overhead channel. EDMAC-3 is also used for SNMP management of the distant end modem. AUPC automatically adjusts modem transmit power based on feedback from the distant end modem to maintain the desired Eb/No. AUPC and EDMAC are supported for point-to-point duplex links.

## Management & SNMP Proxy

The modem can be managed via the front panel, the remote M&C port (EIA-232/EIA-485), or the 10/100Base-T Ethernet port. With support for SNMP, HTTP and Telnet, the modem can be easily integrated into an IP-based management system. The CDM-625A-EN can also act as SNMP proxy for the distant end CDM-625A-EN. This allows distant end CDM-625A-EN management using SNMP without requiring an end-to-end IP link.

## IEEE 1588v2 Precision Time Protocol (PTP)

PTP has emerged as the key technology for frequency, time and phase synchronization over a packet network. The CDM-625A-EN incorporates hardware support for PTP, thereby significantly improving synchronization accuracy for satellite backhaul.

## Advanced FSK for LPOD Monitoring & Control

The Advanced FSK allows for monitoring and control of LPOD through modem front panel menus, serial remote control and Telnet.

## Feature Enhancements

Enhancing the capability of the CDM-625A-EN in the field is easy. Features that do not require additional hardware can be added on site, using FAST access codes purchased from Comtech EF Data.

## Specifications

Data Rate	18 kbps to 25 Mbps, in 1 bps steps (modulation, FEC & data interface dependent)
Symbol Rate	18 kspss to 12.5 Msps
Operating Frequency	50 – 180 MHz (standard) and 950 – 2250 MHz (option) 100 Hz resolution, independent TX and RX operation
Major Operating Modes (See User Manual for Details)	Open network, per IESS-308 / 309 / 310 / 314 transparent, closed network per IESS-315 LDPC / TPC Codec (option) VersaFEC Codec (option) with ACM or Constant Coding & Modulation (CCM) EDMAC Framed with/without AUPC RS Outer Codec High rate ESC / Enhanced ESC (ESC++) Drop & insert (D&I) / Enhanced D&I++ (option) Quad E1 drop & insert (QDI) (option) DoubleTalk Carrier-in-Carrier (option)
FEC & Modulation	
None	Uncoded BPSK/QPSK/OQPSK
Viterbi: k=7, per IESS-308/309	Rate 1/2 BPSK/QPSK/OQPSK Rate 3/4 QPSK/OQPSK Rate 7/8 QPSK/OQPSK
Viterbi with Reed Solomon	Rate 3/4 16-QAM Rate 7/8 16-QAM
Sequential	See user manual for details
Reed Solomon	Open network and closed network modes
TCM (Per IESS-310)	8PSK/TCM Rate 2/3
Integrated LDPC and TPC (2 <sup>nd</sup> Gen) Codec (Optional Plug-in Module)	<b>LDPC Code Rates</b> Rate 1/2 BPSK/QPSK/OQPSK Rate 2/3 QPSK/OQPSK/8PSK/8-QAM Rate 3/4 QPSK/OQPSK/8PSK/8-QAM/16-QAM <b>TPC Code Rates</b> Rate 5/16 BPSK Rate 21/44 BPSK/QPSK/OQPSK Rate 3/4 QPSK/OQPSK/8PSK/8-QAM/16-QAM Rate 7/8 QPSK/OQPSK/8PSK/8-QAM/16-QAM Rate 0.95 QPSK/OQPSK/8PSK/8-QAM
VersaFEC Codec (Option)	BPSK Rate 0.488 QPSK Rate 0.533, 0.631, 0.706, 0.803 8-QAM Rate 0.576 (ECCM), 0.642, 0.711, 0.780 16-QAM Rate 0.644 (ECCM), 0.731, 0.780, 0.829, 0.853 BPSK 0.493 (ULL) QPSK 0.493, 0.654, 0.734 (ULL)
Scrambling	IDR Mode, no RS, - per ITU V.35 (Intelsat variant) IBS mode, no RS - per IESS-309, externally frame synchronized Transparent Closed Network mode, no RS or Turbo coding - per ITU V.35 (Intelsat variant) EDMAC mode, no RS coding - externally frame synchronized - proprietary Turbo Product Code/LDPC/VersaFEC modes - externally frame synchronized - proprietary All RS modes - externally frame synchronized per IESS-308/309/310

Management	10/100Base-T Ethernet with SNMP, HTTP and Telnet support, EIA-232, EIA-485 (2- or 4-wire)
Form C Relays	Hardware fault, RX and TX traffic alarms, open network backward alarms
External Reference (Input OR Output)	BNC connector <u>Input</u> : 1, 2, 5, or 10 MHz, -6 dBm to +10 dBm, 50 Ω/75 Ω (nominal) <u>Output</u> : 10 MHz, 2.7 V peak-to-peak ± 0.4 V, low impedance output

### Data Interfaces

EIA-422/-530 DCE, Up to 14 Mbps V.35 DCE, Up to 14 Mbps	25-pin D-sub (female)
LVDS Serial, Up to 25 Mbps HSSI Serial, Up to 25 Mbps	25-pin D-sub (female)
G.703 T1, 1.544 Mbps (Balanced 100 Ω) G.703 T2, 6.312 Mbps (Unbalanced 75 Ω or balanced 110 Ω)	9-pin D-sub (female) or BNC (female)
G.703 E1, 2.048 Mbps (Unbalanced 75 Ω or balanced 120 Ω) G.703 E2, 8.448 Mbps (Unbalanced 75 Ω)	
ASI, Up to 25 Mbps Additional 2.048 Mbps E1 Ports for Quad-E1 (Balanced 120 Ω)	BNC (female) 9-pin D-sub (female)
Overhead Data	44-pin High-density D-sub (male)
Modem Alarms	15-pin D-sub (male)
4-port 10/100Base-T Managed Ethernet Switch (With Packet Processor)	4 x RJ-45

### Modulator

Frequency Stability	± 0.06 ppm (± 6 x 10 <sup>-8</sup> ), 0° to 50°C (32° to 122°F) with internal reference
Transmit Filtering	Per IESS-308
Alpha (Rolloff)	5%, 10%, 15%, 20%, 25%, 35%
Harmonics and Spurious	Better than -60 dBc/4 kHz (typically <-65 dBc/4kHz) Measured from 1 to 500 MHz (50-180 MHz band) Measured F0 ± 500 MHz (950-2250 MHz band)
Transmit On/Off Ratio	-60 dBc minimum
Output Phase Noise	< 0.480° rms double sided, 100 Hz to 1 MHz (Minimum 16 dB better overall than the Intelsat IESS-308/309 requirements) dB/Hz      Frequency Offset -63.0      100 Hz -73.0      1 kHz -83.0      10 kHz



	-93.0 100 kHz Fundamental AC line spurious is -42 dBc or lower The sum of all other single sideband spurious, from 0 to 0.75 x symbol rate, is -48 dBc or lower
Output Power	50-180 MHz: 0 to -25 dBm, 0.1 dB steps 950-2250 MHz: 0 to -40 dBm, 0.1 dB steps
Power Accuracy	50-180 MHz: ± 0.5 dB over frequency, data rate, modulation type and temperature range of 15 to 35° C ± 0.8 dB over frequency, data rate, modulation type and temperature range of 0 to 50° C 950-2250 MHz: ± 0.7 dB over frequency, data rate, modulation type and temperature range of 15 to 35° C ± 1.0 dB over frequency, data rate, modulation type and temperature range of 0 to 50° C
Output Impedance & Return Loss	50-180 MHz: 50 Ω/75 Ω, 16 dB minimum return loss (18 dB typical), BNC connector 950-2250 MHz: 50 Ω, 19 dB minimum return loss (21 dB typical), Type-N connector
Clocking Options	Internal, ± 0.06 ppm (SCT) External, locking over a ± 100 ppm range (TT) Loop timing (RX satellite clock) – supports asymmetric operation External clock
External TX Carrier Off	By TTL 'low' signal or external contact closure
BUC Reference (10 MHz)	Via TX IF center conductor, 10.0 MHz ± 0.06 ppm (with internal reference), selectable on/off, 0.0 dBm ± 3 dB
BUC Power Supply (HW Option)	24 VDC, 4.17 Amps max., 90 W @ 50° C 48 VDC, 3.125 Amps max., 150 W @ 50° C (180 W @ 30° C) Supplied through TX IF center conductor and selectable on/off via M&C control

### Demodulator

Input Power Range, Desired Carrier	50-180 MHz: -105 + 10 log (symbol rate) to -70 + 10 log (symbol rate) dBm 950-2250 MHz: -130 + 10 log (symbol rate) to -80 + 10 log (symbol rate) dBm
Max Composite Operating Level	50-180 MHz: 94 – 10 log (symbol rate, desired carrier) dBc, +10 dBm max., with the additional requirement that within ± 10 MHz of the desired carrier the composite power is ≤ +30 dBc 950-2250 MHz: 102 – 10 log (symbol rate, desired carrier) dBc, +10 dBm max., with the additional requirement that within ± 10 MHz of the desired carrier the composite power is ≤ +30 dBc
Absolute Maximum	+20 dBm
Adaptive Equalizer	5-tap design, selectable on/off
Acquisition Range	Programmable in 1kHz increments
Below 64 ksymbols/sec	± 1 kHz to ± (Rs/2) kHz, where Rs = symbol rate in ksymbols/sec
Between 64 and 389 ksymbols/sec	± 1 kHz to ± 32 kHz
Above 389 ksymbols/sec	± 1 kHz to ± (0.1 * Rs) kHz, up to a maximum of ± 300 kHz
Acquisition Time	Highly dependent on data rate, FEC rate, and demodulator acquisition range. E.g. 120 ms average at 64 kbps, R1/2 QPSK, ± 10 kHz acquisition sweep range, 6 dB Eb/No
Plesiochronous/Doppler Buffer	Selectable from 64 to 262,144 bits, in 16-bit steps (Additional limitations for G.704 frame boundaries)
Receive Clock	RX satellite, TX terrestrial, external reference
Clock Tracking	± 100 ppm minimum

LNB Reference (10 MHz)	Via RX IF center conductor, 10.0 MHz ± 0.06 ppm (with internal reference), selectable on/off, -3.0 dBm ± 3 dB
LNB Voltage	Selectable on/off, 13 VDC, 18 VDC per DiSEq 4.2 and 24 VDC at 500 mA maximum
Monitor Functions	Eb/NO estimate, corrected BER, frequency offset, buffer fill state, receive signal level

### DoubleTalk Carrier-in-Carrier

Delay Range	0 to 330 ms
Power Spectral Density Ratio (Interferer to Desired)	BSPK/QPSK/8PSK/8-QAM: -7 dB to +11 dB 16-QAM: -7 dB to +7 dB
Maximum Symbol Rate Ratio	3:1 (TX:RX or RX:TX)
Eb/No Degradation	0 dB Power Spectral Density Ratio BPSK/QPSK/OQPSK: 0.3 dB 8-QAM: 0.4 dB 8PSK: 0.5 dB 16-QAM: 0.6 dB +10 dB power spectral density ratio Additional 0.3 dB
Satellite Restrictions	Satellite in "loop-back" mode (i.e., the transmit station can receive itself) "Non-processing" satellite (i.e., does not demodulate or remodulate the signal)

### Available Options

Hardware	100 – 240 VAC, 120 W AC primary power supply
Hardware	-48 VDC, 125 W primary power supply
Hardware	-24 VDC, 120 W primary power supply
Hardware	24 VDC, 90 W @ 50°C BUC power supply, AC, 24 VDC or 48 VDC primary power supply
Hardware	48 VDC, 150 W @ 50°C (180 W @ 30°C) BUC power supply, AC or 48 VDC primary power supply
Hardware	Integrated TPC (2nd generation) and LDPC Codec module
FAST	L-Band IF (in addition to 70/140 MHz)
FAST	Modem data rate – 10 Mbps, 15 Mbps, 20 Mbps or 25 Mbps
FAST	8PSK and 8-QAM modulation (8-QAM requires TPC/LDPC or VersaFEC Codec)
FAST	16-QAM modulation
FAST	TPC/LDPC Codec data rate – 10 Mbps, 15 Mbps, 20 Mbps or 25 Mbps
FAST	Activate DoubleTalk Carrier-in-Carrier Feature
FAST	DoubleTalk Carrier-in-Carrier Data Rate (full) – 512 kbps, 1.1 Mbps, 2.5 Mbps, 5 Mbps, 10 Mbps, 15 Mbps, 20 Mbps or 25 Mbps
FAST	DoubleTalk Carrier-in-Carrier Data Rate (fractional) – 2.5 Mbps, 5 Mbps, 10 Mbps, 15 Mbps, 20 Mbps or 25 Mbps
FAST	VersaFEC Codec data rate (CCM) – 1.1 Mbps, 2.5 Mbps, 5 Mbps or 16 Mbps
FAST	VersaFEC Codec symbol rate (ACM) – 300 ksps, 1.2 Msps or 4.1 Msps
FAST	Open network – IBS with high rate IBS ESC, IDR and audio
FAST	D&I / D&I++ for single Port T1/E1
FAST	D&I++ For Quad E1 Port 2, 3 and 4
FAST	Quality of Service
FAST	Header Compression
FAST	Payload Compression
FAST	Advanced Network Timing (IEEE 1588v2 PTP)

### Accessories

CRS-170A	1:1 Modem Redundancy Switch (L-Band)
CRS-180	1:1 Modem Redundancy Switch (70/140 MHz)
CRS-500	1:N Modem Redundancy System (For use with Packet Processor Only)
CRS-282XXX	1:10 IF Redundancy Switch (For use with CRS-500)

**Environmental and Physical**

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -40 to 85°C (-40 to 185°F)
Humidity	95% maximum, non-condensing
Power Supply	100 – 240 VAC, +6%/-10%, 50/60 Hz, auto sensing -24 VDC (HW option) -48 VDC (HW option)
Dimensions (1RU) (height x width x depth)	1.75" x 19.0" x 17.65" (4.4 x 48 x 44.8 cm) approximate
Weight	10.8 lbs (4.9 kg) maximum, with all option modules and 48 VDC BUC power supply installed
CE Mark	EN 301 489-1 (ERM) EN55022 (Emissions) EN55024 (Immunity) EN 61000-3-2 EN 61000-3-3 EN60950 (Safety)
FCC	FCC Part 15, Subpart B



2114 West 7th Street, Tempe, Arizona 85281 USA  
Voice: +1.480.333.2200 • Fax: +1.480.333.2540 • Email: [sales@comtechefdata.com](mailto:sales@comtechefdata.com)

See all of Comtech EF Data's Patents and Patents Pending at <http://patents.comtechefdata.com>

Comtech EF Data reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes. Information in this document may differ from that published in other Comtech EF Data documents. Refer to the website or contact Customer Service for the latest released product information