


Newtec

OD6000 OEM SATELLITE DEMODULATOR BOARD (R2.1)

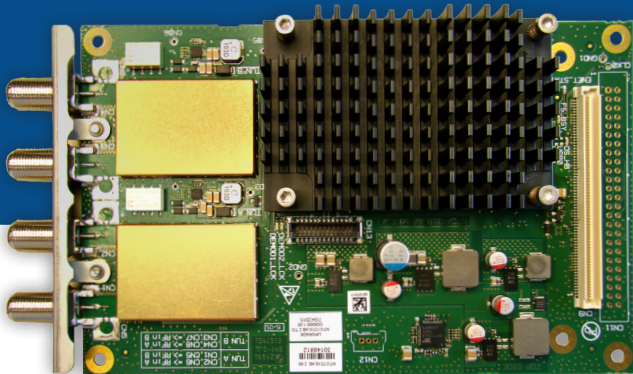

Description

Being fully compliant with the newest standard for Digital Video Broadcasting over Satellite (DVB-S2X), the Newtec OEM Satellite Demodulator Board OD6000 R2.1 offers the following advantages:

- Same form factor as the former NTC/7044 OEM demodulator boards
- 4 x L-band input selectable by software command
- Newtec Clean Channel Technology® compliant
- Support of the DVB-S, DVB-DSNG, DVB-S2 and DVB-S2X standards
- Single +5V DC power supply
- Single 140-pins or 50-pins legacy connector for power supply, management and data interfaces
- Management over I²C interface under a Binary Message Format
- SPI interface for enhanced software upload (only with 140-pins connector)

The OD6000 R2.1 board is a state-of-the-art, high-end professional DVB-S2X demodulator board able to process data rates up to 190 Mbit/s and operate in high-order modulation schemes upto 64APSK. Available to third party manufacturers under OEM agreement, the high performance OD6000 R2.1 is the best solution for the demodulation of DVB-S/S2/S2X carriers in IRDs and for all applications requiring Baseband frame outputs.

In its default configuration, the demodulator board is capable of demodulating an MPEG2 transport stream in DVB-S, DVB-DSNG and DVB-S2/S2X. The Multistream, VCM modes of DVB-S2/S2X are also supported. Only one Transport Stream out of a multistream carrier can be output, by defining the ISI marker of the selected stream.

The OD6000 R2.1 has a 4 x L-band input (950-2150 MHz). The active input is selectable and can provide DC power and frequency band selection signals compatible with most professional and commercial LNBS.

The demodulator board delivers an MPEG transport stream on a parallel DVB-SPI output. If the demodulated carrier is a multistream signal, the OD6000 R2.1 can filter and output one of the transport streams, and the ISSY (Input Stream Synchroniser) mechanism as defined in the DVB-S2(X) standard is activated to recover the initial data rate. Alternatively, the board can output the Baseband frames on the same parallel DVB-SPI output.

To compensate for linear distortion in the transmission channel, the OD6000 R2.1 is equipped with an adaptive equalizer.

The demodulator board can be controlled via an I²C link with a comprehensive range of monitoring and control functions.

Clean Channel Technology is available on the demodulator. Clean Channel Technology further improves satellite efficiency by up to 15% compared to the DVB-S2 standard.

Key Features

- DVB-S2X, DVB-S2 and DVB-DSNG/S standard compliant
- QPSK, 8PSK, 16APSK, 32APSK & 64APSK (under license)
- Single Transport Stream output based upon ISI filtering
- Baseband frames output (under license)
- Support of Multistream and VCM operation
- Data rates up to 190 Mbit/s
- Baud rate up to 60 Mbaud
- 4 x L-band input
- Automatic MODCOD detection
- Adaptive equalizer
- LNB power and control
- Monitoring and control via I²C
- Clean Channel Technology

Applications

- Contribution
- Primary distribution
- DSNG
- Trunking
- Data broadcast
- Data monitoring

Input interface

L-BAND INPUT

- Connector Selectable from 4 x F-type (F), 75 ohms
- Carrier Level Maximum -25 dBm
Minimum
(-70+Es/No(thr)+10log(f))dBm: QEF degradation<0.1 dB
(-80+Es/No(thr)+10log(f))dBm: degradation<0.3 dB
(-90+Es/No(thr)+10log(f))dBm: degradation<3 dB
where f=baud rate in Mbaud and Es/No(thr)=
Es/No value in dB for QEF reception
- Max. Composite -10 dBm
<15 dB above 30 Mbaud carrier
<30 dB above 1 Mbaud carrier
- Frequency 950 - 2150 MHz
- Acquisition range
DVB-S/DSNG >7.5 Mbaud: 7.5 MHz + Rs/10 where Rs = symbol rate
<7.5 Mbaud: Rs/10 + user settable range
- DVB-S2(X) >20 Mbaud: (1 + Roll-Off) * Rs/2
<20 Mbaud: user settable between Rs/2 and Rs * 1.1
- Return loss >11 dB
- Isolation between inputs >40 dB
- Adjacent signal Less than 0.5 dB degradation for two adj. carriers < (C₀ + 7) dBm/Hz with C₀ = signal level density

LNB POWER & CONTROL

- On the operational L-band input connector
- Current: max 350 mA (on selected L-band input)
- Voltage: 11.5-14 V (vertical polarisation)
16-19 V (horizontal polarisation)
& additional 22 KHz ± 4 kHz (band selection according to universal LNB for ASTRA satellites) & DiSeqC command transmission

Demodulation

MULTIPLE OR SINGLE TRANSPORT STREAM RECEPTION (DVB-S2(X))

SUPPORTED MODULATION SCHEMES AND FEC

- DVB-S/DSNG: acc. EN 300 421 & EN 301 210
Outer/Inner FEC: Reed Solomon /Viterbi
MODCODS: QPSK:1/2, 2/3,3/4, 5/6, 7/8;
8PSK: 2/3, 5/6; 8/9
16QAM: 3/4, 7/8
- DVB-S2: acc. EN 302 307
Outer/Inner FEC: BCH/ LDPC
MODCODS: QPSK: 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5,
5/6, 8/9, 9/10; 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9,
9/10; 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10;
32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
- DVB-S2X: acc. DVB Doc. A83-2 (exc. VL-SNR)
Outer/Inner FEC: BCH/ LDPC
MODCODS: Outer/Inner FEC: BCH/LDPC
normal frames:
QPSK: from 1/4 to 9/10
8PSK: from 3/5 to 9/10
16APSK: from 26/45 to 9/10
32APSK: from 32/45 to 9/10
64APSK: from 11/15 to 5/6
Linear MODCODS (normal frames):
8APSK-L: 5/9; 26/45
16APSK-L: from 1/2 to 2/3
32APSK-L: 2/3
64APSK-L: 32/45
short frames:
QPSK: from 11/45 to 8/9
8PSK: from 7/15 to 8/9
16APSK: from 7/15 to 8/9
32APSK: from 2/3 to 8/9

MIN-MAX BAUDRATES

- DVB-S2 & DVB-S2X
1-60 Mbaud
- DVB-S/DSNG
1-45 Mbaud

OUTPUT

- Single Transport Stream
Max. channel bitrate 190 Mbps
Max. user bitrate 171 Mbps
- Baseband frames
Max. bitrate 190 Mbps

FRAME LENGTH

- DVB-S2(X) short frames 16200 bits
- DVB-S2(X) normal frames 64800 bits
Mixing of normal frames & short frames not possible in Multistream
- DVB-S/DSNG 188 bytes

ROLL-OFF FACTOR

- DVB-S2X 5% -10% -15% -20% -25% -35%
- DVB-S2 20% -25% -35%
- DVB-S-DSNG 25% -35%

CLEAN CHANNEL TECHNOLOGY

- Roll-Off: 5%-10%-15%-20%-25%-35%
- Optimum carrier spacing

QEF Performance

DVB-DSNG/S: E_b/N₀ (dB) SPECIFICATION FOR BER=1E-7 AFTER RS (188 BYTES)

MODCOD	<20 Mbaud	> 20 Mbaud
QPSK- 1/2	3.9	3.9
QPSK- 2/3	4.4	4.5
QPSK- 3/4	4.9	5.1
QPSK- 5/6	5.4	5.8
QPSK- 7/8	5.8	6.4
8PSK- 2/3	6.3	6.5
8PSK- 5/6	8.3	8.8
8PSK- 8/9	8.8	9.8
16QAM - 3/4	8.4	8.6
16 QAM- 7/8	10.1	11.1

Remark on the use of pilots off with DVB-S2 and DVB-S2X

We strongly discourage the use of pilots off under following conditions as strong link margin degradation can occur:

- 64APSK MODCODS
- QPSK 13/45, 8PSK 7/15, 16APSK 3/5, 16APSK 7/15, 16APSK 8/15, 16APSK 23/36, 16APSK 26/45, 16APSK 28/45, 32APSK 2/3-L MODCODS

For rates below 10 Mbaud in combination with normal frames:

- QPSK1/4, QPSK 1/3, QPSK 2/5, QPSK 1/2, 8PSK 3/5, 8PSK 2/3, 16APSK 2/3.

DVB-S2: E_g/N₀ (dB) SPECIFICATION FOR FECFRAME FER = 10-3

MODCOD	Normal frames		Short frames	
	36 Mbaud	60 Mbaud	36 Mbaud	60 Mbaud
QPSK 1/4	-2.6	-2.4	-3.1	-2.5
QPSK 1/3	-1.3	-1.1	-1.1	-0.8
QPSK 2/5	-0.3	-0.2	-0.2	-0.1
QPSK 1/2	1.1	1.2	0.6	0.7
QPSK 3/5	2.3	2.4	2.5	2.5
QPSK 2/3	3.2	3.2	3.3	3.4
QPSK 3/4	4.1	4.2	4.3	4.3
QPSK 4/5	4.8	4.8	4.9	4.9
QPSK 5/6	5.3	5.3	5.4	5.4
QPSK 8/9	6.3	6.3	6.5	6.5
QPSK 9/10	6.5	6.5	6	6.2

8PSK 3/5	5.8	6	6.9	7
8PSK 2/3	6.7	6.8	8.2	8.2
8PSK 3/4	8	8.2	9.7	9.7
8PSK 5/6	9.5	9.5	11	11
8PSK 8/9	10.8	10.8	9.3	9.5
8PSK 9/10	11.1	11.1		
16APSK 2/3	9.2	9.4	9.3	9.5
16APSK 3/4	10.4	10.6	10.6	10.6
16APSK 4/5	11.2	11.3	11.3	11.4
16APSK 5/6	11.8	11.9	12	12
16APSK 8/9	13	13.1	13.2	13.3
16APSK 9/10	13.3	13.3		
32APSK 3/4	13.1	13.4	16.1	16.1
32APSK 4/5	13.9	14.2	13.3	13.5
32APSK 5/6	14.6	14.9	14.1	14.2
32APSK 8/9	15.9	16	14.8	14.9
32APSK 9/10	16.2	16.2	16.1	16.1

DVB-S2X: Es/No (dB) SPECIFICATION FOR FECFRAME FER = 10-3

MODCOD	FRAME	36 Mbaud	60 Mbaud
QPSK 13/45	Normal	-1.8	-1.7
QPSK 9/20	Normal	0.4	0.5
QPSK 11/20	Normal	1.7	1.7
8APSK 5/9-L	Normal	5	5.2
8APSK 26/45-L	Normal	5.4	5.5
8PSK 23/36	Normal	6.4	6.5
8PSK 25/36	Normal	7.3	7.4
8PSK 13/18	Normal	7.8	7.9
16APSK 1/2-L	Normal	6.4	6.9
16APSK 8/15-L	Normal	7	7.3
16APSK 5/9-L	Normal	7.2	7.6
16APSK 26/45	Normal	8	8.4
16APSK 3/5	Normal	8.2	8.6
16APSK 3/5-L	Normal	7.9	8.4
16APSK 28/45	Normal	8.5	8.8
16APSK 23/36	Normal	8.7	9
16APSK 2/3-L	Normal	8.9	9.3
16APSK 25/36	Normal	9.6	9.9
16APSK 13/18	Normal	10	10.2
16APSK 7/9	Normal	11	11.2
16APSK 77/90	Normal	12.3	12.5
32APSK 2/3-L	Normal	11.6	11.9
32APSK 32/45	Normal	12.3	12.8
32APSK 11/15	Normal	12.7	13.2
32APSK 7/9	Normal	13.5	13.8
64APSK 32/45-L	Normal	14.7	15.4
64APSK 11/15	Normal	15.6	16.2
64APSK 7/9	Normal	16.1	16.6
64APSK 4/5	Normal	16.5	16.9
64APSK 5/6	Normal	17.2	17.5
QPSK 11/45	Short	-2.2	-2.1
QPSK 4/15	Short	-1.8	-1.6
QPSK 14/45	Short	-1.2	-1.1
QPSK 7/15	Short	1	1.2
QPSK 8/15	Short	1.8	2
QPSK 32/45	Short	3.9	4
8PSK 7/15	Short	4.4	4.9
8PSK 8/15	Short	5.2	5.6
8PSK 26/45	Short	5.8	6.1
8PSK 32/45	Short	7.8	7.9
16APSK 7/15	Short	6.8	7.6
16APSK 8/15	Short	7.6	8.2
16APSK 26/45	Short	8.2	8.6
16APSK 3/5	Short	8.5	8.8
16APSK 32/45	Short	10.2	10.4
32APSK 2/3	Short	11.7	12
32APSK 32/45	Short	12.6	13

Output interface

DATA AND CLOCK OUTPUT

- Connector 140-pins IDE connector type FCI 61083-141402LF
- Electrical DVB-SPI with synthesized output clock
- Clock The recovered TS clock, max. 27 MHz
Single stream reception: byte rate
Multistream reception: at TS rate

Physical

- Mechanical Single PCB, 160 x 100 x 1.6 mm
- Component height <15 mm at top, <4mm at bottom side
- Power supply On same connector as Data output
+5V ± 5% at 3A max. for maximum rate (no LNB current)
provides max. 350 mA LNB current
- Temperature
- Operational: 0°C to 50°C (0 to 95% non-condensing) & minimal airflow of 1.5 m/s
- Storage: -40 to +70°C (0 to 95% non-condensing)

Generic

MONITOR AND CONTROL INTERFACES

- On same connector as Data output
- I²C (@ 100 kbps on 5V)
- Protocol in a Binary Message Format

SOFTWARE UPLOAD INTERFACE

- On same connector as Data output
- I²C (@ 100 kbps on 5V) and SPI (on 3.3V) (on 140-pins connector only)
- In background with back-up and roll-back mechanism

CONTROL

- Standard selection
- Interface and symbol rate
- Roll-off factor: manual or automatic
- Decoding & demodulation mode
- TS output selection, based upon ISI filtering
- Spectrum Inversion On/Off/Auto
- Acquisition range
- LNB band and polarisation selection (13/18 V and 22 kHz)
- L-band input selection
- Global reset

MONITORING

- All control parameters
- Input level, carrier & clock frequency offset
- Uncorrectable base-band frames count (DVB-S2/S2X)
- Es/No (DVB-S2/S2X)
- Link margin (DVB-S2/S2X)
- Eb/No (DVB-S/DSNG)
- Uncorrectable TS packets count (DVB-S/DSNG)
- Estimated BER after decoding (DVB-S/DSNG)
- Sync status, alarms
- Board + firmware version

Newtec OD6000 R2.1 OEM Satellite Demodulator Board		Ordering n°
Configuration Options Category		OD6000
		Select 1 option
Hardware	OD6000 Hardware R1.0 (140-pins connector)	HW-10
	OD6000 Hardware R1.1 (50-pins connector)	HW-11
		Select 1 option
Operating Software	OD6000 Major Software R1*	MS-10
		Select 1 option
Output streams	Single Video TS*	VP-01
	Baseband frames*	BB-01
	Baseband frames incl. padding*	BB-02
		Select 1 option
Output Interface	DVB-SPI*	SP-01
		Select 1 option
Demodulation Standard and Coding (includes multistream support)	DVB-S/S2/S2X Q/8PSK*	DC-10
	DVB-S/S2/S2X Q/8PSK 16QAM 16APSK*	DC-11
	DVB-S/S2/S2X Q/8PSK 16QAM 16/32APSK*	DC-12
	DVB-S/S2/S2X Q/8PSK 16QAM 16/32APSK/64APSK*	DC-14
		Select 1 option
Demodulation Maximum Symbol Rates	Demodulation Symbol Rate 36 Mbaud*	DR-36
	Demodulation Symbol Rate 54 Mbaud*	DR-54
	Demodulation Symbol Rate 60 Mbaud*	DR-60

(*) Selectable via license key

This brochure is provided for information purposes only. The details contained in this document, including product and feature specifications, are subject to change without notice and shall not bind Newtec in any way.

Newtec

SHAPING THE FUTURE OF SATELLITE COMMUNICATIONS

Europe

Tel: +32 3 780 65 00
Fax: +32 3 780 65 49

North America

Tel: +1 203 323-0042
Fax: +1 203 323-8406

South America

Tel: +55 11 2092 6220
Fax: +55 11 2093 3756

Asia-Pacific

Tel: +65 6777 22 08
Fax: +65 6777 08 87

China

Tel: +86 10-823 18 730
Fax: +86 10-823 18 731

MENA

Tel: +971 4 443 60 58
Fax: +971 4 368 67 68