

PUL 070D
PULD00701330NZB000
70 MHz to 1330 MHz Data Grade Upconverter

Quintech PUL 070D

General Description:


The **PULD00701330NZB000** is an ultra-stable frequency converter that translates a 70 MHz IF channel to a 1330 L-Band channel. Based on Quintech's PLL stabilized fixed channel frequency converters, the PUL features a stability performance that meets the IESS 308/309 standard, and is suitable for current high speed data transmission rates and high order modulations.

Specifications:

Input Frequency:	70 MHz IF
Output Bandwidth (-3 dB):	36 MHz
Input Power Level:	-50 to -20 dBm
Overall Gain/Loss:	0 dB \pm 2 dB
Output Frequency:	1330 MHz, non-inverting
L.O. Stability:	\pm 1 ppm
Input Return Loss:	13 dB
Output Return Loss:	10 dB
Spurious:	-50 dBc
Phase Noise:	Offset (Hz) (dBc/Hz)
	10 -60
	100 -75
	1,000 -76
	10,000 -78
	100,000 -99
1,000,000 -110	
Output Connector:	Type F, 75 Ω
Input Connector:	BNC, 75 Ω
Power Requirements:	100-240 V~, 50/60 Hz
Power Consumption:	17 W
Operating Temperature:	+10° to +60° C
Mechanical:	1 RU (1.75" H x 19" W x 12.5" D)
Weight:	7.5 lbs. gross (boxed), 5.0 lbs. net




Quintech PUL 070D Front and Rear Panel:

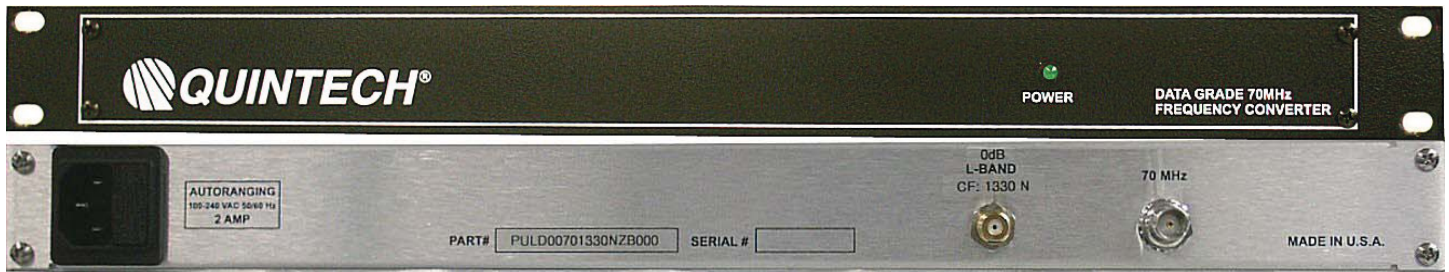

Special Instructions:

To utilize the PULD00701330NZB000, connect a 70 MHz line to the "70 MHz" connector on the rear panel of the unit. The 1330 MHz L-Band channel will be present at the L-BAND connector, also on the rear panel. Primary power required is 100-240 V~, 2 Amp via the IEC AC connector.

NOTE: The PULD00701330NZB000 has been designed for indoor use only. Opening the unit will immediately void the warranty.

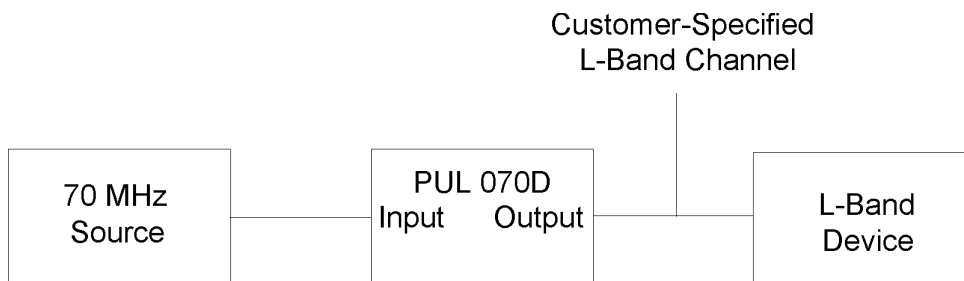

Digisat International Inc.
4195 W. New Haven Ave., Suite 15
Melbourne, FL 32904
USA
+1-321-676-5250
Email: sales@digisat.org
<http://www.digisat.org>