


BAIRD Non-Penetrating Supporting System

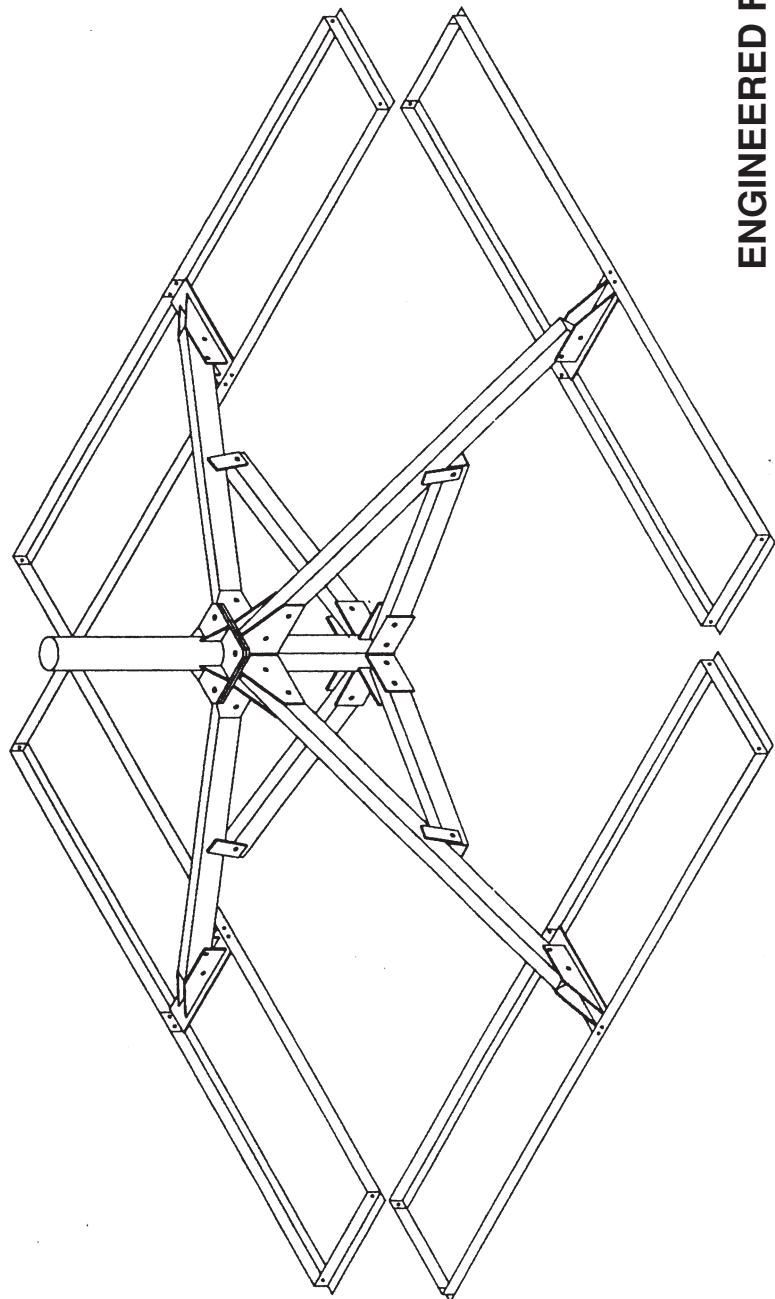

ENGINEERED FOR RELIABILITY, SIMPLICITY AND DURABILITY

1. Sets up easily and quickly.
2. Hot dip galvanized for superior protection.
3. Typical usage: Antenna size up to 10' (3.0M) for transmit and receive.
4. Drop shipped direct to installers.

MODEL: PL-10



PRODUCT SPECIFICATIONS

MODEL: PL-10
 Non-Penetrating or Penetrating
 flat roof antenna supporting system.

TYPICAL USAGE

1. Handles up to a 10' (3.0M) antenna.
 In cases where wind velocity, building height and exposure level combine to cause severe wind loading, the PL-10 may not be recommended for an 10' (3.0M) antenna.
2. Ku & C band - transmit and receive.
3. Pad areas - 10.67, 21.33 and 32.00 sq.ft.
4. Footprints
 - a. 1'4" x 8' = 10.71' x 10.71' = 114.70 sq.ft.
 - b. 2'8" x 8' = 13.38' x 13.38' = 179.02 sq.ft.
 - c. 4' x 8' = 16.04' x 16.04' = 257.28 sq.ft.

Finish - Hot dip galvanized
 Mast Diameter - as required
 Mast Height - as required

The mount if needed can be equipped with a leveling device.

Ballast required will be recommended based on antenna diameter, type and survival requirements.

It is the customer's responsibility to see that all applicable codes are satisfied. It is suggested that a structural engineer review the application of this product.

An engineering report is available to assist with determining the proper amount of ballast.

A pad can be supplied to isolate the mount from the roof surface.

Under extreme wind conditions the mount should be tethered with cable.

