

# Intellian t110Q

## Optimized for European Market

1.05m Stabilized Ku-band Marine Satellite TV Antenna



### Optimized for European Market

Intellian provides just right solution for European customer's purpose. It's simple, easy, reliable and affordable. For vessels that may require global TV coverage in the future, a conversion kit is also available for WorldView LNB Model.

### DVB / DVB-S2 Signal Reception

Some of the HD TV services have moved onto DVB-S2, and there will be more in the future. Thanks to Intellian's groundbreaking DVB-S2 digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

### Intelligent Signal Distribution

t-Series systems now feature an embedded Quattro Switching Module, which intelligently distributes different tone signals to the correct ports on any legacy multiswitches installed throughout the ship. No need for reconfiguring anything below deck apart from the ACU.

### Global Satellite Library

The t110Q includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Moving from one region to another is as simple as a few button taps on your Smart phone or Tablet.

### Dedicated Management Ethernet Port

The Management Ethernet Port on the front of ACU enables direct and simple network connection between a PC and the ACU. The Management Port supports DHCP network connection by default, allowing automatic IP configurations and quick access to Intellian's remote management solution, Aptus Web.

### Wireless Connectivity

The built-in Wi-Fi enables the ACU to be wirelessly connected and can be either turned on and off by a switch. Any kind of wireless devices such as PCs, laptops and smartphones can be used to connect to the ACU and monitor, control and change the settings of the system wirelessly.

**Buy Now!**



# Intellian

Connect with the best


# Intellian t110Q

Optimized for European Market  
1.05m Stabilized Ku-band Marine Satellite TV Antenna


## Technical Specifications

Physical	
Radome Height	142cm / 55.9"
Radome Diameter	133cm / 52.4"
Reflector Diameter	105cm / 41.3"
Weight	91kg / 201lbs
Environmental	
Operating Temp. Range	-25°C to +55°C / -13°F to +131°F
Storage Temp. Range	-40°C to +80°C / -40°F to +176°F
Water Ingress	IPX6
Approvals	CE / FCC
Warranty	3 year parts and 2 year labor
Performance	
Reception Frequency	Ku-band (10.7~12.75GHz)
Polarization	Vertical / Horizontal
Minimum EIRP	42dBW
Azimuth Range	680°
Elevation Range	-15° to +120°
Ship's Motion	Roll ±25°, Pitch ±15°, Yaw ±8° @ 6 sec period
Turning Rate	Up to 12°/sec & 5°/sec <sup>2</sup>
RF Output	Quad Output
Antenna Control Unit	
Dimensions (WxDxH)	43.1cm x 38cm x 4.4cm / 17" x 15" x 1.7"
Weight	3.5kg / 7.7lbs
Display	2 line 40 Character VFD module
GPS Interface	Built-in (NMEA 0183 GPS)
Power Requirement	100~240V AC, 50~60Hz, 2A
Power Consumption	Typ.50W, Max. 100W
LNB LO Frequencies	
Local Oscillator Frequency	<b>Polarization</b> <b>Area</b>
Universal Low: 9.75 GHz High: 10.6 GHz	Quad Linear    Europe, Middle East, Africa, some Asia countries
<b>Note</b>	<ul style="list-style-type: none"> <li>LNB stability : +/- 1.0MHz (25°C)</li> <li>Low / High band Switching Low Band : 0KHz , High Band 22KHz±4KHz</li> </ul>

## System Diagram

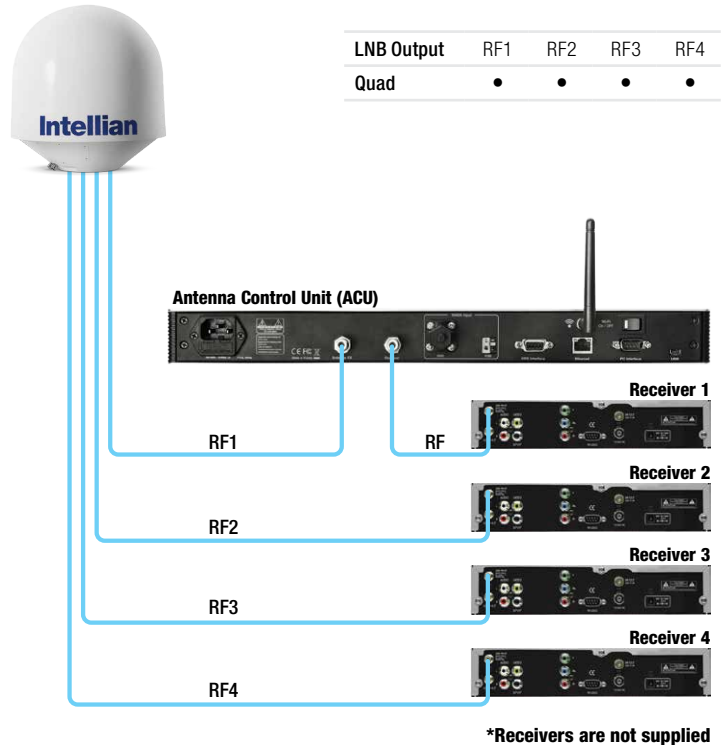

## Coverage Map

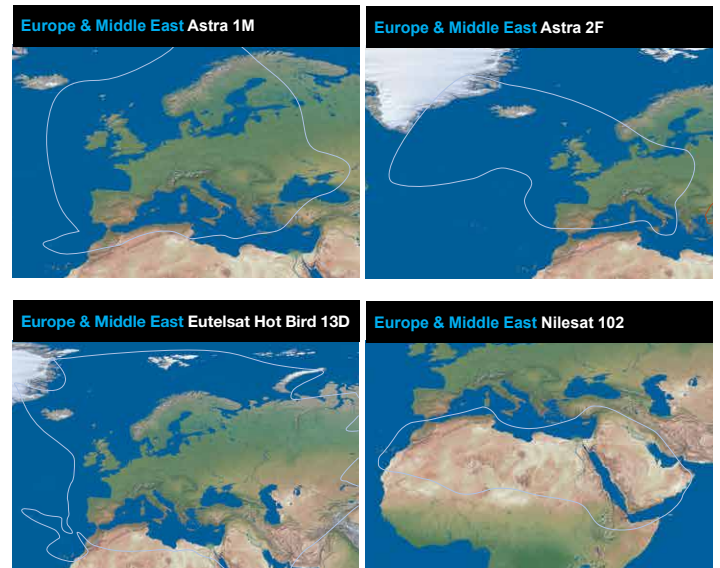

# Intellian

**Global HQ**  
Innovation Center / Factory  
Intellian Technologies, Inc  
T +82 31 379 1000  
F +82 31 377 6185

**APAC**  
Seoul Office  
Intellian Technologies, Inc.  
T +82 2 511 2244  
F +82 2 511 2235

**Americas**  
Irvine Office  
Intellian Technologies USA, Inc.  
T +1 949 727 4498  
F +1 949 271 4183  
Toll Free +1 888-201-9223

**EMEA**  
Rotterdam Office  
Intellian B.V.  
T +31 1 0820 8655  
F +31 1 0820 8656