

## MDM5010 High Throughput Modem on the Newtec Dialog® Platform

The Newtec MDM5010 Satellite modem is the very high throughput modem capable of handling more than 500 Mbps of traffic. With a symbol rate ranging from 1 up to 500 Mbaud and coding from QPSK to 256APSK in the forward channel, it enables network operators to set-up almost any type and size of network on any available type of satellite - for example, traditional FSS, next generation High Performance Satellites, HTS.

The Newtec MDM5010 Satellite Modem supports a wide range of IP Services including internet/intranet access, Voice over IP (VoIP), backbones for mobile backhauling and trunking, fibre restoral/ backup services, contribution and multicasting services.

The high spectral efficiency, high packet and bit rate capability makes the MDM5010 a perfect fit for very bandwidth-intensive services in the enterprise, backhauling, offshore and maritime markets.

## Return Link Technology Flexibility for Tailored Services

For the return channel, a choice can be made between three different return technologies depending on the type of application.

The modem supports S2 Extensions **SCPC** in the return, which allows for highly efficient, medium to high rate dedicated return bandwidth, ranging from 1 to 133 Mbaud for applications such as high speed IP backbones, cellular backhauling, trunking, maritime, mobility and file/video contribution. **MF-TDMA** mode enables low rate overbooked and bursty traffic profiles for inactive sites in business continuity networks, small cell backhaul networks or for always-on connectivity in occasional use networks. The third mode, **Mx-DMA®**, combines the best of both worlds and fills in the gap between MF-TDMA and SCPC.

With Newtec's **Mx-DMA**, satellite bandwidth is allocated dynamically in real-time depending on traffic demand, Quality of Service (QoS) profiles and link conditions. Changes are seamless without any

packet loss or additional jitter. This allows services with continuously changing rates (from a few kbps up to 72 Mbps) as with MF-TDMA, but at SCPC efficiency. Mx-DMA allows network operators to deploy anything between dedicated to low-to-medium overbooked services at any given time at minimum space capacity cost. Having the choice between these three return technologies in a network within a single modem guarantees network operators a business model with maximum flexibility in supported applications, responsiveness to new market opportunities and Service Level Agreement (SLA) schemes that fit customers' needs.


## High Service Satisfaction

For a true broadband experience at minimal bandwidth consumption, the Newtec MDM5010 modem incorporates IP traffic enhancement software for TCP acceleration, GTP optimization/ acceleration, compression, packet aggregation and encryption. Traffic can be classified in seven different QoS classes based on IP traffic characteristics. This allows the network operator to provide a flexible hierarchical QoS model depending on any application's SLA.

The MDM5010 offers cost-effective satellite connectivity for a wide variety of professional applications on the Newtec Dialog platform.

## Main Advantages

- High throughput upstream and downstream capabilities
- DVB-S2X forward and MF-TDMA, S2 Extensions SCPC and Newtec patented Mx-DMA return link capabilities
- The most optimal modulation and bandwidth allocation while guaranteeing the highest efficiency and availability
- Bolstered with Newtec's technologies FlexACM®, Point&Play®, HRC™
- Easy to use multilingual web GUI for installation, diagnostics and troubleshooting

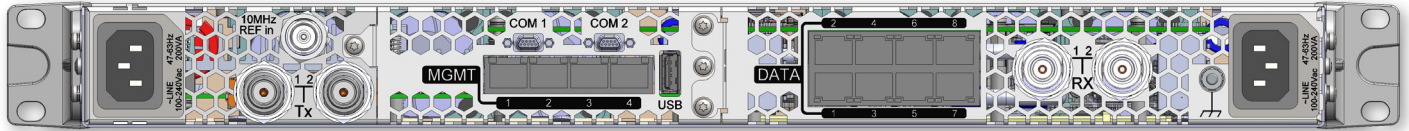

## Key Features

- High performance unicast service rates up to 400/150 Mbps
- Transmit multicast up to 200 Mbps
- Receive multicast support (IGMPv2/static configuration) up to 400 Mbps
- Embedded TCP acceleration and encryption
- GTP acceleration and header compression
- Multilevel QoS with seven QoS Classes
- Low jitter for real time applications
- DNS Cache/Relay
- Versatile IP routing and addressing
- Support of IPv4 and IPv6
- Multiple virtual networks behind the modem
- DVB-S2X forward
- MF-TDMA 4CPM with Adaptive Return Link
- Mx-DMA HRC return with AUPC and ACM
- SCPC S2 Extensions return with ACM

## Markets

- Enterprise/SME
- Trunking
- Cellular backhaul
- Government and defense
- Broadcast
- Offshore and maritime

## Applications

- Internet/Intranet access
- VoIP telephony (SIP, H.323, ...)
- 2G/3G/4G cellular backhauling
- Backbone connections, fiber restoration
- SNG live and file contribution

## Satellite Link Interface

### FORWARD CARRIER (RX)

- Standard DVB-S2/DVB-S2X
- Modulation QPSK, 8PSK, 16APSK, 32APSK, 64APSK, 256 APSC BCH/LDPC
- FEC
  - 53 MODCODs (normal frames):
    - QPSK: from 1/4 to 9/10
    - 8PSK: from 3/5 to 9/10
    - 16APSK: from 26/45 to 9/10
    - 32APSK: from 32/45 to 9/10
    - 64APSK: from 11/15 to 5/6
    - 128APSK: 3/4; 7/9
    - 256APSK: 32/45; 3/4
  - 13 linear MODCODs (normal frames):
    - 8APSK-L: 5/9; 26/45
    - 16APSK-L: from 1/2 to 2/3
    - 32APSK-L: 2/3
    - 64APSK-L: 32/45
    - 256APSK-L: 29/45 to 11/15
  - 41 MODCODs (short frames):
    - QPSK: from 11/45 to 8/9
    - 8PSK: from 7/15 to 8/9
    - 16APSK: from 7/15 to 8/9
    - 32APSK: from 2/3 to 8/9
- Roll-off 5, 10, 15, 20, 25 and 35 %
- Symbol rate 1 Mbaud to 500 Mbaud

### RETURN CARRIER (TX)

- MF-TDMA mode
  - Modulation Scheme 4CPM (Quaternary Continuous Phase Modulation)
  - Channel bandwidth 128, 192, 256, 384, 512, 768, 1024, 1536, 2048, 2560, 3072, 3584, 4096 kHz
  - MODCODs 0, 1, 2, 3, 4, 5
- Mx-DMA mode
  - Modulation Scheme HRC
  - Modulation QPSK up-to 32APSK with 40 MODCODs
  - Roll-off 5%
  - Symbol rate 32 kbaud - 20 Mbaud
  - VL-SNR spreading 2 -12 on 10 MODCODs
- SCPC mode
  - Modulation scheme DVB-S2, S2 Extensions
  - Modulation QPSK, 8PSK, 16APSK, 32APSK
  - FEC 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
  - Roll-off 5, 10, 15, 20, 25 and 35 %
  - Symbol rate 1-133 Mbaud

## Modem Interfaces

### TX INTERFACE - TX1

- Frequency 950 - 2400 MHz
- Connector F-Type - 75 Ohm/N-Type - 50 Ohm (hardware option)
- TX level -55 dBm to +5 dBm
- BUC power supply 24VDC, 4A/48V, 3.5A (hardware option)
- BUC reference 10 MHz, 10/50 MHz in R3.3
- BUC reference level +3 dBm (+/- 2 dB)

### RX INTERFACE - RX 1

- Frequency 950 - 2150 MHz
- Connector F-Type - 75 Ohm/N-Type - 50 Ohm (hardware options)
- RX level -65 to -25 dBm
- LNB power supply 13/18VDC, 500mA
- Polarization selection power supply voltage
- LNB LO selection 22 kHz on/off
- LNB Reference 10 MHz

### 10 MHZ BUC REFERENCE INPUT

- Connector BNC

### MANAGEMENT/DATA INTERFACE:

- 4/8 x RJ45 100/1000 Tx, auto MDI/MDIX

### FUTURE USE

- USB (future use) USB 2.0
- Mass storage option (future use) MicroSD cards

## Management

### MULTILINGUAL WEB GUI

- Web-based multilingual GUI: no installation of client software required
- Supported web browsers: Internet Explorer, Mozilla Firefox, Google Chrome, Safari
- Management web GUI accessible via configurable management IP address

### ANTENNA CONTROL

- OpenAMIP support

### SNMP

- The modem support SNMPv2 for modem performance management

## Performance

### LAYER 3

- Max RX: 400 Mbps
- Max TX: 200 Mbps
- Maximum concurrent receive multicasts: 10
- Maximum concurrent transmit multicasts: 4

### LAYER 3 - UNICAST TRAFFIC (CONCURRENT)

- Accelerated, encrypted: 300/60 Mbps
- Accelerated, non-encrypted: 300/70 Mbps
- Non-accelerated, non-encrypted: 400/150 Mbps
- Accelerated TCP connections: 75.000

### PPS

- RX: 250 kPPS
- TX: 180 kPPS
- RX + TX: 250 kPPS

## Diagnostics & Configuration

- Self-test on management GUI for end-user and operator troubleshooting including diagnostics for support case reporting.
- Software upgradeable via satellite

## Mechanical & Environment

- Housing Height: IRU, width: 19", depth 44,5 cm
- Weight: 8 kg
- Operational Temperature: 0° to 50°C
- Humidity: 5% - 95% non-condensing
- Storage: -10° to 60°C

## Power Supply

- Power supply: AC, 50Hz\220-260 V and 60 Hz\100-130 V DC, 36-76 V or - 48 Vdc (hardware option)
- Modem power consumption: 60 W maximum

## Standards and Protocols

### STANDARDS

- Satellite Interface
  - EN 302307-1 DVB-S2
  - EN 302307-2 DVB-S2X
  - ETSI EN 301 489-1 V1.6.1 (2005-09)
  - ETSI EN 301 489-12 V1.2.1 (2003-05)
  - ICES-003 Issue 4 (2004)
  - FCC: title 47 of the CFR: 2008 part 15(b)

### Certification

- Safety EN 60950-1 second edition
- RoHS 2002/95/EG directive compliant
- WEEE 2002/96/EG directive compliant
- CE CE compliant and marked
- UL UL compliant

### LAN Interface

- IEEE 802.3 10T Ethernet
- IEEE 802.3u 100TX Ethernet
- IEEE 802.2ab 1000TX Ethernet
- IEEE 802.1q VLANs

### GTP

- GTP-U ETSI 3GPP TS 29.281

### PROTOCOLS

- Terminal Authentication, UDP, IP, IPv6, ICMP, TCP, ARP, FTP, DHCP, IP forwarding, Diffserv, DNS, IGMPv1/2

This brochure is provided for information purposes only. The details contained in this document, including product and feature specifications, are subject to change without notice and shall not bind Newtec in any way.