

■ Standard Ku-band 1.5W BUC | Block Upconverter

MODEL No. NJT8301 series

< Features >

*** Super High Efficiency & Low Distortion**

- P1dB: +31 dBm min. over temperature
- Power Consumption: 14 W max.
- ACPR: -26 dBc @ Pout = +31 dBm

*** Smallest Size & Lightest Weight**

- Dimension: 91.55 (L) x 68 (W) x 42.5 (H) mm
- Weight: 350 g

(*) As 1.5W Ku-band BUCs for VSAT released in June 2011

*** Leading Technology Equipped**

*** RoHS Compliance**



< Line-Up >

Model No.	RF Frequency	Local Frequency	IF Frequency	Output Power @ P1dB	IF Connector	Power Supply
NJT8301N	14.0 to 14.5 GHz (Standard Ku-band)	13.05 GHz	950 to 1,450 MHz	1.5W Linear (+31 dBm min.)	N-type	+12 to +30 V DC Power
NJT8301F					F-type	

< Specifications >

Item	Specifications
Output Interface	Waveguide, WR75 with Groove
Input Interface	N-type, female (50 ohm) [Model No.: NJT8301N] F-type, female (75 ohm) [Model No.: NJT8301F]
Output Power @ 1dB G.C.P.	+31 dBm min. over temperature
Linear Gain	55 dB typ., 48 dB min.
ACPR	-26 dBc typ. @ Pout = +31 dBm
Requirement for External Reference	[Frequency] 10 MHz (sine-wave)
	[Input Power] -5 to +5 dBm @ Input port
	[Phase Noise] -125 dBc/Hz max. @ 100 Hz -135 dBc/Hz max. @ 1 kHz -140 dBc/Hz max. @ 10 kHz
L.O. Phase Noise	-60 dBc/Hz max. @ 100 Hz -70 dBc/Hz max. @ 1 kHz -80 dBc/Hz max. @ 10 kHz -90 dBc/Hz max. @ 100 kHz -100 dBc/Hz max. @ 1 MHz
Receive Band Noise Density	-156 dBm/Hz max. @ 10.95 to 12.75 GHz
Input V.S.W.R.	2 : 1 max.
Output V.S.W.R.	2 : 1 max.
Power Requirement	DC Power, +24 V (Range: +12 to +30 V)
Power Consumption	14 W max. @ Pout = +31 dBm 11 W max. @ No IF and +25 °C 2 W max. @ 10 MHz Reference Off (Mute on)
Mute	Shut off the HPA in case of L.O. unlocked or no 10 MHz reference signal
Temperature Range (ambient)	Operating: -40 to +55 °C Storage: -40 to +75 °C
Humidity	0 to 100 %
Altitude	15,000 feet [4572 m]
Dimension & Housing	91.55 (L) x 68 (W) x 42.5 (H) mm [3.60" (L) x 2.68" (W) x 1.67" (H)] without interface connector
Weight	350 g [0.77 lbs]

*Note: The contents of this sheet are subject to change without notice.

■ Standard Ku-band **1.5W BUC** | Block Upconverter


MODEL No. **NJT8301** series

< Comparison Sheet >

Item	Current Model : NJT5115F	New Model: NJT8301F
RF Frequency Range	14.0 - 14.5 GHz (500 MHz BW)	
Output Power @P1dB	+31.0 dBm min. over temp.	
Power Consumption	17 W max. N/A N/A	18% Reduction ➔ 14 W max. @ Pout=+31dBm 11 W max. @ No IF, +25C 2W max. @ 10MHz Ref. Off
Weight	1.0 kg [2.2 lbs]	65% Reduction ➔ 350 g max. [0.77 lbs]
Dimensions	64% Reduction (Volume comparison)	
(L)	163.4 mm [6.43"]	➔ 91.55 mm [3.6"]
(W)	100 mm [3.94"]	➔ 68 mm [2.68"]
(H)	44.5 mm [1.75"]	➔ 42.5 mm [1.67"]

< Outline Drawing >

- NJT8301F -

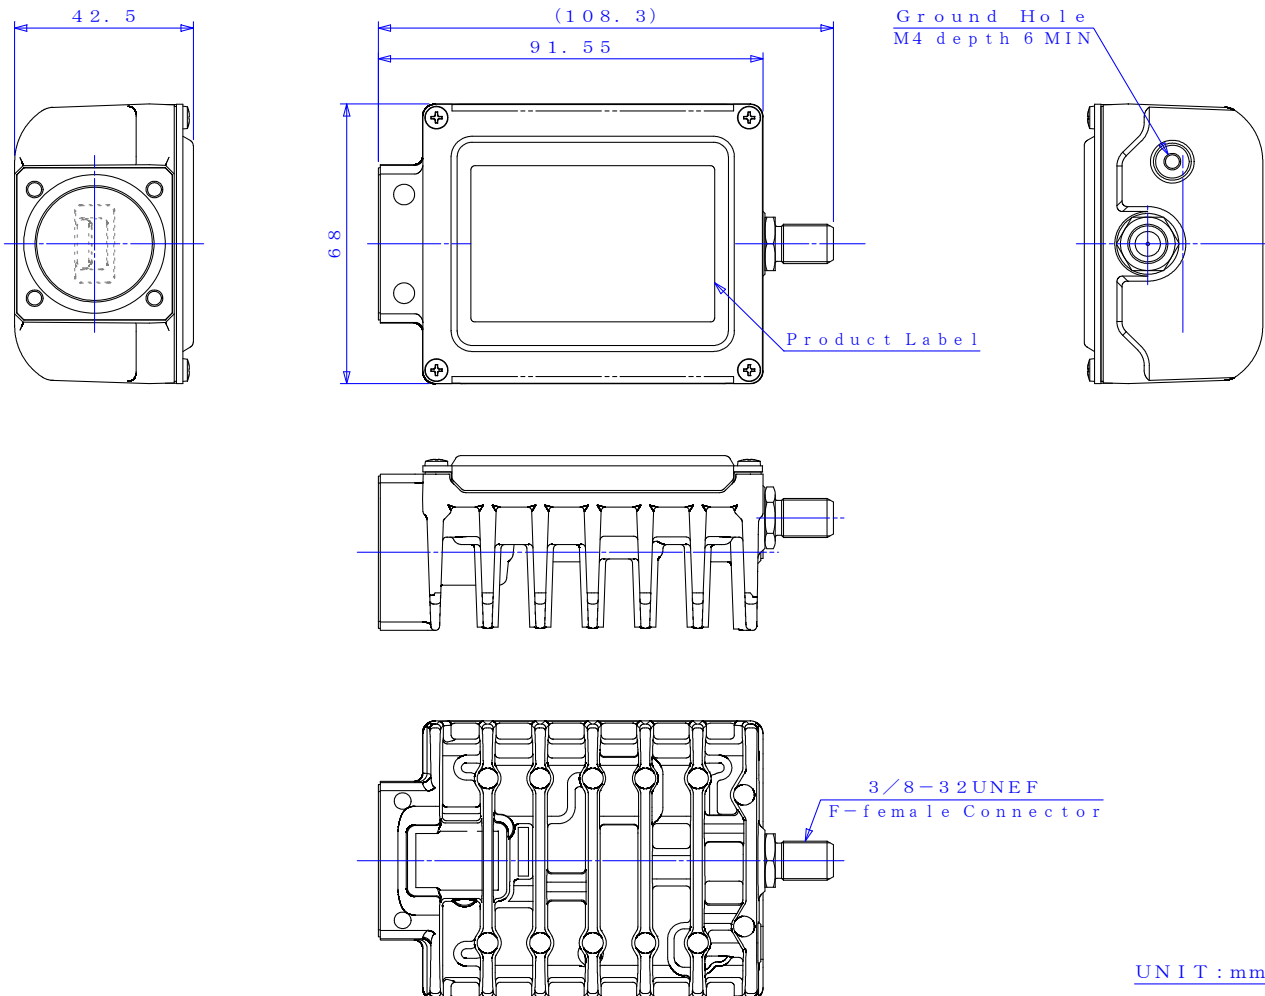

*Note: The contents of this sheet are subject to change without notice.