


# Newtec

## MCX7000 MULTI-CARRIER SATELLITE GATEWAY (R1.0)

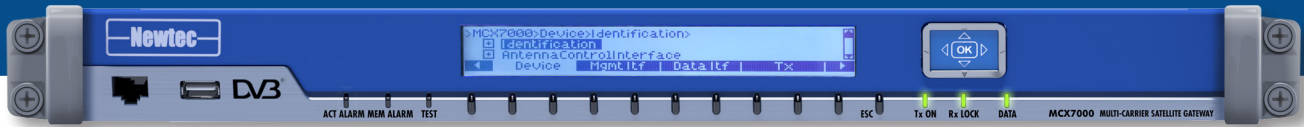

### Description

Building upon the MDM6100 Broadcast Satellite Modem software suite, the enhanced hardware platform of the MCX7000 extends the modem capabilities beyond single carrier support. In a first release, three 133 MBaud carriers can be demodulated, next to modulation of a 133 MBaud signal with full support of the DVB satellite standards up to DVB-S2X. Each and every transport stream embedded in one of the received carriers can be output on one of the six (optional) ASI or dual Ethernet ports. The same data interfaces can be used as input ports for the modulator. Transmodulation of a received stream is also an option.

Its remote in-band management and software upgradeability makes it the receiver equipment of choice for remote unattended towers and headends. Subsequent releases of this future-proof DVB-S2X platform guarantee, by simple software upgrade, even increased functionality and higher density.

#### Delivering the highest uptime for vital links

Uptime and reliability are essential in the design of the multi-carrier gateway, taking a vital role in the satellite network. Input source redundancy and the shortest redundancy switch-over times, operating both in 1+1 and N+1 topologies, are setting the standard in our industry.

Advanced capabilities are built in such as a MPEG Transport Stream analyser, support of SMPTE 2022 FEC at the GbE inputs (for distributed IP headends), and native support of Carrier ID according to the new DVB standard as well as in the transport stream NIT Table. Special care was taken to cope with jittery transport stream over IP inputs. The 6 ASI ports are programmable as inputs or outputs allowing for monitoring as well as operational ASI ports.

#### Get the best performance and lower your costs

The MCX7000 Multi-Carrier Satellite Gateway performs among the best, offering unmatched bandwidth efficiency optimization options, thereby lowering overall Total Cost of Ownership. The fully automated operation of Newtec's field-proven Equalink 3 predistortion technology is now available for any satellite transmission application providing up to 15% bandwidth gain in DVB-S2(X) 8PSK mode in single carrier per transponder constellations.

Clean Channel Technology, in combination with DVB-S2X, improve satellite efficiency by up to 15%, thereby enabling much smaller carrier spacing.

Maximum symbol rates up to 133 MBaud and modulations up to 256APSK (DVB-S2X standard) combined with VCM (Variable Coding and Modulation) allow for maximum throughput in large contribution links.

Up to 8 transport streams are supported in both directions over the redundant GbE ports. On top of this, another 6 transport streams can be routed in either direction over the optional 6 ASI ports.

The streams received from up to 3 satellite carriers can be sent to any of the ASI or GbE ports.

The MCX7000 Multi-Carrier Satellite Gateway can be easily monitored and controlled via a comprehensive front panel menu, advanced web GUI as well as via SNMP protocol. This enables easy integration into any industry-standard EMS/NMS system. Its bidirectional remote in-band management and software upgradeability makes it the receiver equipment of choice for remote unattended towers and headends.

#### Evolve towards tomorrow's technology

Built upon flexible and latest generation programmable technology, the MCX7000 Multi-Carrier Satellite Gateway is a future-proof building block that lets any satellite network evolve to the next level of capabilities. A scalable, pay-as-you-grow, licensing and software upgrade mechanism facilitates the launch of new services, or last minute network design changes, without rebuilding the entire network infrastructure. Migration from ASI to GbE and IF to L-band is facilitated by simple in-field installation of license keys.

Migration of standard distribution links towards the new DVB-S2X standard can be as simple as inserting an MCX7000 Multi-Carrier Satellite Gateway in the head-ends while keeping the installed base of IRDs.

Featured modulator technologies such as Equalink 3 linear and non-linear predistortion and Clean Channel Technology bring best-in-class output spectrum, enhancing the satellite link margin and throughput to its optimum. The non-linear post compensation in the receivers brings extra link margin when in uplink limited multi-carrier per transponder constellation.

The Newtec MCX7000 is a new dense DVB-S2X multi-carrier satellite gateway for efficient distribution to towers and headends, resulting in OPEX and CAPEX savings. This 133 MBaud modem is also fit for broadcast contribution applications on standard and HTS spot-beam transponders.



# SPECIFICATIONS

## Key Features

- Configurations:
  - 3 x DVB-S2X carrier demodulator
  - Modem with one or two demodulators with optional ASI interfaces
- Minimum symbol rate: 256 kBaud
- Maximum symbol rate: 133 MBaud
- Data rates up to 425 Mbit/s
- IF (70/140) and L-Band (950-2150) high power outputs
- Demodulators with dual L-band input
- Highest system reliability and service uptime through robust design and industry leading redundancy solutions
  - Exceptional jitter recovery on TS over IP inputs with SMPTE 2022 FEC
  - Redundant optional ASI or GbE interfaces in single stream mode
  - Redundancy with main TS over ASI and back-up TS over IP input
  - Redundant optional ASI interfaces for up to 3 TS input streams
  - Built-in TS Analyser with PCR jitter measurements
  - Accurate link margin monitoring through the use of NODE® Noise & Distortion Estimator tool
  - RFI reduction using DVB RF Carrier ID (DVB-CID) and NIT table CID
  - Automatic TS rate adaptation
  - L-band monitoring output
  - Market leading RF purity and performance
  - Programmable amplitude slope equalizer
  - PRBS generator for link performance tests
  - Optional high stability internal clock reference
  - Optional dual AC power supply
- Low Total Cost of Ownership as a result of very high bandwidth efficiency technology options, and ease of monitoring and control
  - DVB-S2X, DVB-S2, DVB-DSNG and DVB-S compliant
  - QPSK, 8PSK, 16APSK, 32APSK, 64APSK, 128APSK and 256 APSK
  - Clean Channel Technology provides up to 15% bandwidth efficiency gains on top of the DVB-S2 standard
  - Optional Equalink 3 pre-distortion provides up to 15% bandwidth gain in DVB-S2(X) 8PSK mode, higher QoS and geographic coverage
  - Multistream CCM or VCM mode with ISSY
  - Selection of DSNG profiles acc. WBU-ISOG including the new DVB-S2X standard
  - Secure front panel, SNMP, HTTP and CLI interfaces
- Future-proof design combining video and IP multi-service capabilities, supports transport of today's and tomorrow's services
  - Multistream reception and transmission
  - Up to 8 Transport Streams mux/demux on GbE (TSoverIP) and 6 on optional ASI interfaces
- 4 x built-in encapsulators for opportunistic data insertion up to 70 Mbps, interoperable with IRD's that support Multi Protocol Encapsulation (MPE)
- 4 x MPE decapsulators up to 70 Mbps
- Supports SFN Networks using transparent TS pass-through
- Optional BISS Content protection
- Demodulator supports the Equalink 3 calibration protocol
- External reference input
- Optional 10 MHz reference output
- Easy integration with industry leading management systems (EMS/NMS/OSS)
- Feature-based pricing and software upgrades
- Pay-as-you-grow flexible licensing scheme
- Remote in-band management
- Remote over-the-air software upgrade

## Use cases and applications

**Efficient distribution to towers and headends** resulting in OPEX and CAPEX savings is a major application for the MCX7000. It brings higher efficiency, limited need for rack space and with its transmodulation capability allows for upgrade of existing stations to the DVB-S2X standard while preserving the installed base of IRDs.

The support of DVB-S2X and its upgradeability to the **reception of bonded carriers** makes the MCX7000 the preferred solution for reception of future UHDTV programs. It allows for decoupling modulation and video encoding technology roadmaps and investments.

Another use case is the **reception of multiple contribution links** in a single HUB device, bringing down CAPEX.

Future proof DVB-S2X 133 MBaud Broadcast Modem.

Optional part within a Newtec Dialog multiservice broadcast solution.

## Related Products

M6100	Broadcast Satellite Modulator
MDM6100	Broadcast Satellite Modem
FRC07x0	Frequency converters portfolio
USS0212	1+1 Modulator Redundancy Switch
USS0201	Universal Switching System

## Related Bandwidth Efficiency Technologies

Clean Channel Technology  
Equalink 3  
DVB-S2X

### Support Services for your Professional Equipment

Care Pack Basic and Care Pack Enhanced are the Newtec service and support packages protecting your Newtec equipment over a three-year period.





Figure: Dual demod modem with ASI and GbE interfaces and dual power supply

## Data Interfaces

### ASI INTERFACE (OPTIONAL)

#### Single stream mode

- 2 selectable ASI inputs on BNC (F) - 75 Ohm (coax)
- 2 x ASI output on BNC (F) - 75 Ohm (coax)
- 188 or 204 byte mode
- Rate adapter
- MPTS or SPTS according to ISO/IEC 13818

#### Multi stream mode

- 6 BNC(F) - 75 Ohm (coax) connectors individually configurable as input or output or as 3 redundant TS inputs with auto switching
- 188 or 204 byte mode
- Rate adapter
- MPTS or SPTS according to ISO/IEC 13818

### ETH INTERFACE

- Auto switching 10/100/1000 Base-T Ethernet interface
- Transport stream over IP interface (UDP/RTP)
- Forward Error Correction SMPTE 2022-1 and -2
- 188 or 204 byte mode
- Rate adapter
- MPTS or SPTS according to ISO/IEC 13818

## Content Encryption and Protection

### BISS ENCRYPTION (OPTIONAL)

- Support for BISS-0, BISS-1 and BISS-E
- On one single TS (SPTS or MPTS)

## IP Encapsulation

- Optional 4 MPE Encapsulators
- Max aggregate 70 Mbit/s

## IP Decapsulation

- 4 MPE Decapsulators
- Max aggregate 70 Mbit/s

## Modulation and Demodulation

### SUPPORTED MODULATION SCHEMES AND FEC

- DVB-S  
Outer/Inner FEC: Reed Solomon / Viterbi  
MODCODs:  
QPSK: 1/2, 2/3, 3/4, 5/6, 7/8
- DVB-DSNG  
Outer/Inner FEC: Reed Solomon / Viterbi  
MODCODs:  
8PSK: 2/3, 5/6, 8/9  
16QAM 3/4, 7/8
- DVB-S2 (acc. ETSI EN 302 307 v1.2.1 for DVB-S2)  
Outer/Inner FEC: BCH/LDPC  
52 MODCODs (short & normal frames):  
QPSK: from 1/4 to 9/10  
8PSK: from 3/5 to 9/10  
16APSK: from 2/3 to 9/10  
32APSK: from 3/4 to 9/10
- DVB-S2X standard  
Outer/Inner FEC: BCH/LDPC  
53 MODCODs (normal frames):  
QPSK: from 1/4 to 9/10  
8PSK: from 3/5 to 9/10  
16APSK: from 26/45 to 9/10  
32APSK: from 32/45 to 9/10  
64APSK: from 11/15 to 5/6  
128APSK: 3/4; 7/9  
256APSK: 32/45; 3/4

13 Linear MODCODs (normal frames):

- 8APSK-L: 5/9; 26/45
  - 16APSK-L: from 1/2 to 2/3
  - 32APSK-L: 2/3
  - 64APSK-L: 32/45
  - 256APSK-L: 29/45 to 11/15
- 41 MODCODs (short frames):
- QPSK: from 11/45 to 8/9
  - 8PSK: from 7/15 to 8/9
  - 16APSK: from 7/15 to 8/9
  - 32APSK: from 2/3 to 8/9
  - Support of DVB-S2 VCM mode (on modulator and demodulators)

### SYMBOL RATE RANGE

#### Modulator

- DVB-S2, DVB-S2X 256 kBaud - 133 MBaud
- DVB-S & DVB-DSNG 1 - 45 MBaud

#### Demodulator

- DVB-S2, DVB-S2X 256 kBaud - 133 MBaud
- DVB-S & DVB-DSNG 1 - 45 MBaud

### FRAME LENGTH

- DVB-S & DVB-DSNG 188 bytes
- DVB-S2 & DVB-S2X Short Frames 16200 bits
- DVB-S2, DVB-S2X Normal Frames 64800 bits

### CLEAN CHANNEL TECHNOLOGY

- Roll-off : 5% -10% -15% -20% -25% -35%
- Optimum carrier spacing
- Advanced filter technology

### EQUALINK 3

- Linear and Non-Linear predistortion for all MODCODs
- Maximum rate 72 MBaud

### CARRIER INTERFERENCE REDUCTION

- DVB RF Carrier ID (DVB-CID)
- Spread Spectrum Modulator (BPSK)
- Supports User Data
- Compliant to ETSI 103 129 v1.1.1 (2013-05)
- Carrier ID NIT Table

## Modulation Interfaces

### L-BAND (CONFIGURATION OPTION)

- Connector SMA(F), 50 Ohm
- Frequency 950 - 2150 MHz (10 Hz steps)
- Level -35/+7 dBm (+/- 2dB)
- Return loss > 14 dB
- Switchable 10MHz Reference
- Spurious performance Better than - 65 dBc/4kHz @ +5 dBm output level and > 256kBaud  
Non-signal related: < - 80 dBc @ +5 dBm output

### IF-BAND (CONFIGURATION OPTION)

- Connector BNC (F) - 75 Ohm (intermateable with 50 Ohm)
- Frequency 50 - 180 MHz (10 Hz steps)
- Level -35/+10 dBm (± 2 dB)
- Return loss 50 Ohm : > 14 dB  
75 Ohm : > 20 dB
- Spurious performance Better than - 65 dBc/4kHz @ +5 dBm output level and > 256kBaud  
Non-signal related: < - 80 dBc @ +5 dBm output

### L-BAND MONITORING

- Connector SMA (F), 50 Ohm
- Frequency Same as L-Band output frequency or 1050 MHz in case of IF output option only
- Level -45 dBm
- Return loss > 10 dB

### 10 MHZ REFERENCE INPUT

- Connector BNC (F), 50 Ohm
- Input level -3 dBm up to + 7dBm
- Frequencies 1,2,5,10,20 MHz

### 10 MHZ REFERENCE OUTPUT (OPTIONAL)

- Connector BNC (F), 50 Ohm
- Output level +3 dBm (+/- 2dB)

## Demodulation Interfaces

### DUAL L-BAND INPUT (QTY: 0-3)

- Connector 2 x F-type (F), 75 Ohm
- Return loss > 7 dB (75 Ohm - F(F))
- Maximum total input power: - 10 dBm
- Maximum input signal power: (-30 + 10log(f))dBm where f=baud rate in MBaud
- Minimum input signal power: (-80+Es/No(thr)+10log(f))dBm where f=baud rate in MBaud and Es/No(thr)= Es/No value in dB for QEF reception
- Frequency 950 - 2150 MHz
- Adjacent signal < (Co+7) dBm/Hz with Co = signal level density

### LNB POWER AND CONTROL (ON 1 L-BAND INPUT/DEMODO)

- Max. current 350 mA
- Voltage 11,5 -14 V (Vertical polarization)  
16 -19 V (Horizontal polarization) & additional 22 kHz +/- 4KHz (band selection according to universal LNB for Astra satellites & DiSEqC command transmission)

## Internal 10 MHz Reference Frequency

### STANDARD STABILITY

- Stability: +/- 2000 ppb over 0 to 70° C
- Ageing: +/- 1000 ppb/year

### VERY HIGH STABILITY (OPTIONAL)

- Stability: +/- 2 ppb over 0 to 65° C
- Ageing: +/- 500 ppb/10year

## Generic

### MONITOR AND CONTROL INTERFACES

- Web server GUI (HTTP) via web browser
- M&C connectivity via separate Ethernet links
- Diagnostics report, alarm log (HTTP)
- SNMP v2c

### ALARM INTERFACE

- Electrical dual contact closure alarm contacts
- Connector 9-pin sub-D (F)
- Logical interface and general device alarm

## Physical

- Height 1RU, width: 19", depth 51 cm, 5,8 kg
- Power supply: 90-130 & 180-260 Vac, 260 VA, 47-63 Hz
- Temperature: Operational: 0°C to +50°C / +32°F to +122°F  
Storage: -40° to +70°C / -40°F to +158°F
- Humidity: 5% to 85% non-condensing
- CE label and UL

Newtec MCX7000 Multi-Carrier Satellite Gateway (R1.0)		Ordering n°
<b>Configuration Options Category</b>		<b>MCX7000</b>
Select 1 option		
Hardware Platform	Chassis Type 05 (7000)	CH-05
Select 1 option		
Operating Software	MCX7000 Major Software R1.0*	MS-10
Select 1 option		
Mains Power Supply Unit	PSU Single AC 110/240V	PS-00
	PSU Dual Redundant AC 110/240V	PS-01
Select 1 option		
Data/Video Package	Video TS, Carrier-ID(NIT), TS Analyser*	VP-01
	Video TS, Demod only*	VP-02
Select 1 option		
Video Interface	GbE TSolP, SMPTE-2022 DEC (req. VP-01/VP-02)*	VI-01
	GbE TSolP + ASI(6) (req. VP-01/VP-02 and HS-05)	VI-02
	ASI (6 connectors) (req. VP-01/VP-02 and HS-05)	AS-02
Select max. 1 option		
Slot 1	Demodulator Cl.3	HS-02
Select max. 1 option		
Slot 2	Demodulator Cl.3	HS-04
Select max. 1 option		
Slot 3	ASI board	HS-05
	Demodulator Cl.3	HS-07
Select max. 1 option		
Modulator licenses	No modulator license	ML-00
	One modulator license	ML-01
Select max. 1 option		
Demodulator board licenses	No demodulator board license	DL-00
	One demodulator board license	DL-01
	Two demodulator board licenses	DL-02
	Three demodulator board licenses	DL-03
For a modem or modulator, select 1 option		
Modulator Output Interface	L-band with switchable 10 MHz output*	OU-00
	IF (50-180 MHz)*	OU-01
	IF+ L-band with switchable 10 MHz out*	OU-02
For a modem or modulator, select 1 option		
Modulator Standard and Coding (includes multistream support)	DVB-S Q/8PSK*	SC-01
	DVB-S/S2 QPSK*	SC-02
	DVB-S/S2/S2X Q/8PSK*	SC-03
	DVB-S/S2/S2X Q/8PSK 16QAM 16APSK*	SC-04
	DVB-S/S2/S2X Q/8PSK 16QAM 16/32APSK*	SC-05
	DVB-S/S2/S2X Q/8PSK 16QAM 16/32/64/128/256*	SC-06
For a modem or modulator, select 1 option		
Modulator Maximum Symbol Rates	Modulation Symbol Rate 5 MBaud*	SR-01
	Modulation Symbol Rate 15 MBaud*	SR-02
	Modulation Symbol Rate 36 MBaud*	SR-03
	Modulation Symbol Rate 54 MBaud*	SR-04
	Modulation Symbol Rate 72 MBaud*	SR-05
	Modulation Symbol Rate 133 MBaud*	SR-06
For a modem or demodulator, select 1 option		
Demodulator Standard and Coding (includes multistream support)	DVB-S/S2/S2X Q/8PSK 16QAM 16/32APSK*	DC-01
	DVB-S/S2/S2X up to 256PSK*	DC-02
For a modem or demodulator, select 1 option		
Demodulator Maximum Symbol Rates	Demodulation Symbol Rate 72 MBaud*	DR-01
	Demodulation Symbol Rate 133 MBaud*	DR-02

Newtec MCX7000 Multi-Carrier Satellite Gateway (R1.0)		Ordering n°
<b>Configuration Options Category</b>		<b>MCX7000</b>
Select 1 option		
Internal Reference Clock	Standard 10MHz	IR-00
	Very High Stability 10MHz	IR-02
Select 1 option		
<b>Additional Options Category</b>		
Max. 1 option per category		
Reference Clock Output	10 MHz Reference Output (BNC)	RO-01
Max. 1 option per category		
Pre-distortion	Equalink 3 * (1 license)	AE-01
Max. 1 option per category		
MPE Insertion	MPE Data insertion in TS (req. VP-01)*	VM-01
Max. 1 option per category		
Encryption	BISS (0-1-E) Single TS (Req. VP-01)*	CA-01
<b>Services Category</b>		
Max. 1 option per category		
Support	Care Pack 3 Basic	GA-08
	Care Pack 3 Enhanced	GA-09

(\*) Selectable via license key

Contact your sales representative for details (sales@newtec.eu).

This brochure is provided for information purposes only. The details contained in this document, including product and feature specifications, are subject to change without notice and shall not bind Newtec in any way.



SHAPING THE FUTURE OF SATELLITE COMMUNICATIONS

**Europe**

Tel: +32 3 780 65 00  
Fax: +32 3 780 65 49

**North America**

Tel: +1 203 323-0042  
Fax: +1 203 323-8406

**South America**

Tel: +55 11 2092 6220  
Fax: +55 11 2093 3756

**Asia-Pacific**

Tel: +65 6777 22 08  
Fax: +65 6777 08 87

**China**

Tel: +86 10-823 18 730  
Fax: +86 10-823 18 731

**MENA**

Tel: +971 4 443 60 58  
Fax: +971 4 368 67 68