Norsat International Inc.

35

Innovative Communication Solutions

BUC

KA-BAND 7040STC 4W NON-INVERTED

TYPICAL SPECIFICATIONS

Output frequency	29.5 GHz to 30.0 GHz
Input frequency	950 to 1450 MHz
Output to P1dB	> 36 dBm
L.O. frequency options	28.55 GHz
Input VSWR	1.5 : 1
Output VSWR	2.0 : 1
Phase noise (SSB)	-47 dBc/Hz at 100 Hz -72 dBc/Hz at 1 kHz -77 dBc/Hz at 10 kHz -92 dBc/Hz at 100 kHz -105 dBc/Hz at 1 MHz
External reference signal frequency	10 MHz
Power requirements	+17 to +30 V supplied through center conductor of IF cable
Power consumption	55W
Output Waveguide	WR28
Dimensions	220 (L) x 130 (W) x 48 (H) mm (8.7″ x 5.1″ x 1.9″)
Weight	1.5 kg

External reference level	-5 to +5 dBm
10 MHz external reference phase noise	-140 dBc/Hz at 1 kHz
Gain	55 dB
Gain stability over temperature	±2.0 dB at any constant frequency
Gain stability over operating temperature	±2.0 dB over full band
Temperature Range	-30°C to +60°C

OPTIONAL

Monitor & Control	RS232 PLL Lock Tx on/off

MECHANICAL DIAGRAM

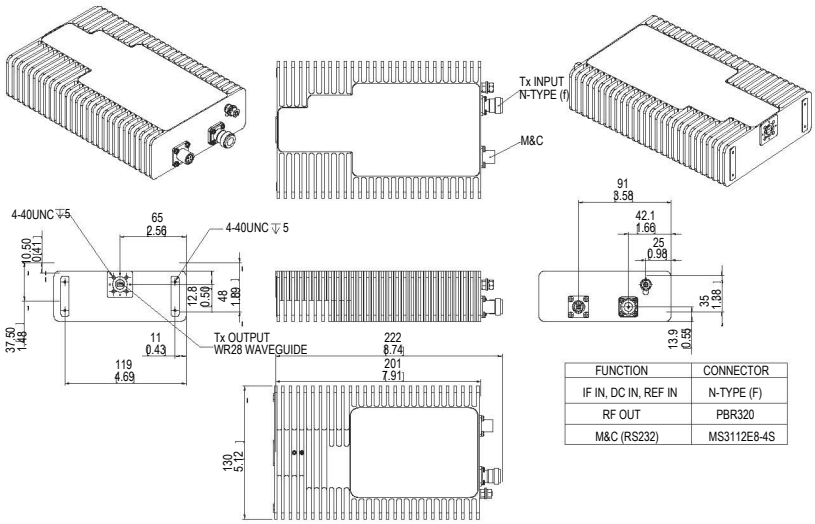

FUNCTION	CONNECTOR
IF IN, DC IN, REF IN	N-TYPE (F)
RF OUT	PBR320
M&C (RS232)	MS3112E8-4S

7040STCN-MC

- **OPTIONAL M&C**
- **CONNECTOR** N - 50 Ohm
- **P1dB** 4W
- **TRANSMITTER SERIES #**

Buy Now!

CE

Norsat International Inc.

North America +1 800 644 4562

Asia Pacific +1 604 821 2813

Europe, Middle East & Africa +44 1522 730 800

South America +1 604 821 2835

Online sales@norsat.com www.norsat.com

© Copyright 2013 Norsat International Inc. All Rights Reserved. Specifications are subject to change without notice.
Final product may not be as illustrated. The information contained herein does not constitute part of any order or contract.

PUB000225 v.1.3