



LNB

KA-BAND 5-BAND PLL 9100HI5-4

TYPICAL SPECIFICATIONS

Noise Figure (@ +25°C)	2.7 dB max.
L.O. Stability (@ over temp.)	+/- 10 KHz
Conversion Gain	55 to 65 dB
Gain Flatness (each band)	4 dBp-p max.
Phase Noise	-60 dBc/Hz (@ 100 Hz) -70 dBc/Hz (@ 1 kHz) -78 dBc/Hz (@ 10 kHz) -93 dBc/Hz (@ 100 kHz)
Input VSWR	1.5 : 1 max.
Output VSWR	2.2 : 1 max.
Image Rejection	40 dBc @ L.O. 16.2 GHz 25 dBc @ L.O. 17.2 GHz 0 dBc min. @ other L.O.s



Gain Ripple (@per Channel)	+/- 1.5 dBp-p max.
1 dB Gain Compression Point	+10 dBm min.
Leakage (@ Input Port)	-60 dBm max.
Required Current	500 mA max.
Input waveguide flange	WR-42 grooved
IF Output Connector	F-connector (75 ohm) N (Optional) (50 ohm)
Dimensions	156 (L) x 67 (W) x 37 (H) mm (6.1 x 2.6 x 1.5 in)
Weight	550g / 19.4 oz
Operating Temperature	-40 ~ +60°C
Storage Temperature	-40 ~ +80°C
Relative Humidity	0 ~ 100% RH


FREQUENCY BANDS AVAILABLE

Model Number	Input Frequency (GHz)	L.O. (GHz)	Control Signal
Band 1	17.20 to 18.20	16.2	13V / no tone
Band 2	18.20 to 19.20	17.2	13V / 22 kHz
Band 3	19.20 to 20.20	18.2	18V / no tone
Band 4	20.20 to 21.20	19.2	18V / 22 kHz
Band 5	21.20 to 22.20	20.2	22V / no tone



HOW TO ORDER

9100HI5N-4

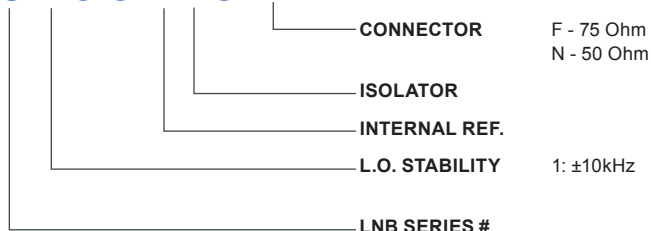

MECHANICAL DIAGRAM

