



1.1 kW C-Band High Power SSPA

DESCRIPTION

Teledyne Paradise Datacom's Indoor, High Power Rack Mount (R) series SSPAs represent the industry's highest power density and most reliable high power amplifier systems. These high power amplifiers are accompanied with a separate power supply chassis.

The power supply is configured as a n+1 redundant, hot swappable, power supply comprised of three modules. Only two modules are required to operate the HPA, therefore one module is redundant. In the event of a power supply module failure, the amplifier system will not fail. The module can then be changed without ever taking the HPA out of service. The microwave amplifier architecture is also designed for maximum soft fail redundancy.

The High Power Rack Mount SSPA employs a modular design, which allows quick and easy replacement in the event of a catastrophic failure of one of the SSPA components. These modular assemblies include: front and rear fan trays; and a rear panel controller card.

FEATURES

- Extremely High Power Density:
to 1.1 kW C-Band;
to 1000W X-Band;
to 500W Ku-Band.
- Hot Swap, n+1 Redundant Power Supply
- Power Factor Corrected Power Supply
- Modular (soft-fail) Architecture
- Removable fan assemblies
- Ethernet Port
- RF Output Sample Port (-40 dB)
- Built-in 1:1 Redundancy Control

OPTIONS

- Extended Frequency Band
- L-Band Input operation
- Reflected Power Monitor
- Phase Combined Systems
- Remote Control Panel
- RF Input Sample Port (-10 dB)
- Rear Panel Air Intake and Exhaust

SPECIFICATIONS

- SSPA Chassis housing:
19.0 X 10.47 X 30.0 in
483 X 266 X 762 mm
180 lbs / 82 kg
- 3RU Power Supply:
19.0 X 5.25 X 15.44 in
483 X 134 X 433 mm
50 lbs / 23 kg
- Gray powder coat finish
- Operating temperature:
0 to +50 °C

Buy Now!



Power Specifications

BAND	PARAMETER	NOTES	LIMITS	UNITS
C-BAND	Frequency Range	(see options for extended band)	5.850 to 6.425	GHz
	Output Power @: Saturation/ P_{1dB} (Typical/Guaranteed minimum)	HPAC6800ARXXXXX HPAC611KARXXXXX	P_{sat} / P_{1dB} 59.0 / 58.0 (800 / 630) 60.4 / 60.0 (1100 / 1000)	dBm (W) dBm (W)
	Power Requirements Line Voltage Line Frequency Power Factor Line Power	HPAC6800ARXXXXX HPAC611KARXXXXX	180 to 265 47 to 63 .90 4150 6000	VAC Hz W W
X-BAND	Frequency Range		7.9 to 8.4	GHz
	Output Power @: Saturation/ P_{1dB} (Typical/Guaranteed minimum)	HPAX6700ARXXXXX HPAX610KARXXXXX	P_{sat} / P_{1dB} 58.5 / 58.1 (700 / 650) 60.0 / 59.5 (1000 / 900)	dBm (W) dBm (W)
	Power Requirements Line Voltage Line Frequency Power Factor Line Power	HPAX6700ARXXXXX HPAX610KARXXXXX	180 to 265 47 to 63 .90 5500 6000	VAC Hz W W
KU-BAND	Frequency Range	(see options for extended band)	14.0 to 14.5	GHz
	Output Power @: Saturation/ P_{1dB} (Typical/Guaranteed minimum)	HPAK6400ARXXXXX HPAK6500ARXXXXX	P_{sat} / P_{1dB} 56.0 / 55.0 (400 / 300) 57.0 / 56.0 (500 / 400)	dBm (W) dBm (W)
	Power Requirements Line Voltage Line Frequency Power Factor Line Power	Power Factor Corrected HPAK6400ARXXXXX HPAK6500ARXXXXX	180 to 265 47 to 63 .90 4600 5100	VAC Hz W W

Options

Extended C-Band 5.850 to 6.725 GHz 5.750 to 6.670 GHz	De-rate power by 1.0 dB linearly from 6.425 to 6.725 GHz De-rate power by 1.0 dB linearly from 6.425 to 6.670 GHz and by 0.5 dB from 5.750 to 5.850	HPAC6XXXBRXXXXX HPAC6XXXCRXXXXX
Extended Ku-Band 13.75 to 14.5 GHz	De-rate power by 1.0 dB linearly from 13.75 to 14.0 GHz	HPAK6XXXBRXXXXX
Reflected Power Monitor		See Configuration Matrix
Block Up Converter (BUC)		See Configuration Matrix
RF Input Sample Port (-10 dB)		See Configuration Matrix



Digisat International Inc.
4195 W. New Haven Ave., Suite 15
Melbourne, FL 32904
USA
+1-321-676-5250
Email: sales@digisat.org
<http://www.digisat.org>

General Specifications: 6RU RM Series

PARAMETER	NOTES	LIMITS	UNITS
Gain	minimum	75	dB
Gain Flatness	full band	±1.0	dB
	Extended C-Band units	±1.5	dB
Gain Slope	per 40 MHz	±0.3	dB/40 MHz
Gain Variation vs. Temperature	0°C to +50°C	±1.0	dB
Gain Adjustment	0.1 dB resolution adjustable by either serial or analog voltage input: 0.5 to 2.5 VDC	20	dB
Intermodulation Distortion	3dB back off relative to P _{1dB}	-25	dBc
AM/PM Conversion	(@ rated P _{1dB})	3.5	°/dB
	(@P _{1dB} -3dB)	0.5	°/dB
Spurious Harmonics	(@ rated P _{1dB})	-60	dBc
	(@ rated P _{1dB} -3dB)	-50	dBc
Input/Output VSWR	All units except Extended C-Band Extended C-Band units ¹	1.30:1 1.50:1	
Noise Figure	at maximum gain	12	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Noise Output	TX Band (C-, X- or Ku-Band)	-75	dBW/4 KHz
	RX Band (C- or Ku-Band)	-150	dBW/4 KHz
	RX Band (X-Band)	-100	dBW/4 KHz
Residual AM Noise	0 - 10 KHz	-45	dBc
	10 KHz - 500 KHz	-20 (1.25 + log F)	dBc
	500 KHz - 1 MHz	-80	dBc
Phase Noise		IESS -308/309 - 10 dB	

Mechanical

Size		19.0 X 10.47 X 30.0	inches
HPA Chassis	width X height X depth	483 X 266 X 762	mm
Power Supply Chassis	width X height X depth	19.0 X 5.25 X 15.44	inches
		483 X 134 X 433	mm
Weight			
HPA Chassis		180 (82)	lbs.(kg)
Power Supply Chassis (3RU)		50 (23)	lbs.(kg)
Finish		powder coat	Gray

Environmental

Operating Temperature	Ambient	0 to +50	°C
Relative Humidity	Condensing	95	%
Cooling System	Integrated	Forced air	

¹ Extended C-Band units may meet 1.30:1 as a special option. Discuss with your sales representative.

Specifications are subject to change.

Interface Specifications; 6RU RM Series

PORT	NOTES	LIMITS	PIN-OUT
Monitor & Control (J7) Parallel Port Outputs	Parallel Port Outputs	Power Supply Fault Auxiliary Fault Mute BUC Fault Temperature Fault Voltage Fault DC Current Fault Low RF Fault	Form C relay Form C relay Form C relay Form C relay Form C relay Form C relay Form C relay Form C relay
Monitor & Control (J7) Parallel Port Inputs	Parallel Port Inputs	Mute Input Local / Remote Fault Clear Standby Select Auxiliary Fault Ground	Opto Isolator Opto Isolator Opto Isolator Opto Isolator Opto Isolator
Main Serial Port (J4)	RS232 / RS485 DB9 (F)	RS232 Out, RS485 TX- RS232 In, RS485 RX- RS485 RX+ RS485 TX+ Service Request 1 Service Request 2 Service Request Common Termination Ground	Pin 2 Pin 3 Pin 4 Pin 1 Pin 6 Pin 8 Pin 7 Pin 9 Pin 5
Auxiliary Serial Port (J5)	RS232 / RS485 DB9 (F)	RS232 In, RS485 RX- RS232 Out, RS485 TX- RS232 DTR, RS485 TX+ RS485 RX+ Termination Ground	Pin 2 Pin 3 Pin 4 Pin 1 Pin 9 Pin 5
Link Port (J8)	1:1 Redundant System Control Link DB9 (F)	RS485+ RS485- Link Out Link In Ground	Pin 1,4 Pin 2,3 Pin 6,7 Pin 8,9 Pin 5
Switch Port (J3)	Redundant Switch Control Molex (43810-0002)	+28 VDC RF Switch 1, pos 1 RF Switch 1, pos 2 RF Switch 2, pos 1 RF Switch 2, pos 2	Pin 1,4 Pin 3 Pin 2 Pin 6 Pin 5
Program Port (J6)	Flash Firmware Program Port	DB25(F)	-
Ethernet Port (J9)	RJ45	TX+ TX- RX- RX+ Ground	Pin 1 Pin 2 Pin 3 Pin 6 Pins 4,5,7,8
Connectors	RF Input, Input & Output Sample RF Output HPAK6XXXR HPAC6XXXR HPAX6XXXR Line Power	Type N WR75 Waveguide WR137 Waveguide WR112 Waveguide (3) IEC feeds	Female Grooved (PBR-120) CPR137G flange CPR112G (PDR-84) Plug

L-Band Operation

Teledyne Paradise Datacom offers C-, X-, and Ku-Band amplifiers with an integrated L-Band Block Up Converter. The L-Band units utilize Paradise Datacom's proprietary ZBUC™ technology. The addition of a ZBUC converter to a 6RU Rack Mountable SSPA typically increases the gain by 2-4 dB. The advantages of ZBUC™ technology include:

- ZBUC™ converter can detect and switch to an externally supplied reference.
- Optional internal high stability (10MHz) reference.
- ZBUC™ converter can lock to an externally supplied reference of 5, 10, 20, 25, or 50 MHz without modification.
- ZBUC™ converter can accept a wide range of external reference power (-10 to +5 dBm)
- ZBUC™ converter can accept FSK monitor and control signal via the IFL for complete amplifier remote control.

Available Frequency Plans


Band	Frequency Band	IF Input	LO Frequency	RF Output	Gain Change
C	Standard C-Band	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz	0-4 dB
C	Extended C-Band	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz	0-4 dB
C	Palapa Band	950 - 1250 MHz	5.475 GHz	6.425 - 6.725 GHz	0-4 dB
C	Insat Band	950 - 1250 MHz	5.775 GHz	6.725 - 7.025 GHz	0-4 dB
C	Extended C-Band 2	950 - 1675 MHz	4.800 GHz	5.750 - 6.475 GHz	0-4 dB
X	Standard X-Band	950 - 1450 MHz	6.950 GHz	7.900 - 8.400 GHz	0-2 dB
Ku	Standard Ku-Band	950 - 1450 MHz	13.050 GHz	14.00 - 14.50 GHz	0-2 dB
Ku	Extended Ku-Band	950 - 1700 MHz	12.800 GHz	13.75 - 14.50 GHz	0-2 dB

Electrical Specifications for 6RU RM SSPA with ZBUC™ converter

PARAMETER	NOTES	LIMITS				UNITS
Gain	Nominal setting	75				dB
Gain Flatness	full band (C-,X-,Ku-bands)	±2.0				dB
Gain Slope	per 40 MHz (C-,X-,Ku-bands)	±0.5				dB/40 MHz
Gain Adjusted Range		20				dB
Gain Stability	Typical C-Band Adj. Range	60 - 80				dB
	Typical Ku-Band Adj. Range 0 to +50 °C	57 - 77				dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	<u>X-band (typ.)</u>	<u>Ku-band (typ.)</u>	
	10 Hz	-30	-60	-60	-50	dBc/Hz
	100 Hz	-60	-80	-75	-65	dBc/Hz
	1 KHz	-70	-80	-75	-72	dBc/Hz
	10 KHz	-80	-85	-100	-90	dBc/Hz
	100 KHz	-90	-120	-110	-110	dBc/Hz
Spurious	In-Band Signal Related (C-/Ku-Band) (Extended C-Band)	-50				dBc
	Close to Carrier Spurious (≤ 20 MHz)	-40				dBc
	Local Oscillator	-50				dBc
		-30				dBm
Noise Figure	At 75 dB gain setting	20				dB
Input VSWR	L-Band	1.5 : 1				
Internal Reference Option	Reference accuracy @ 25 °C	±1 • 10 ⁻⁷				
	Reference Stability over Temperature (-40 to +90 °C)	±1 • 10 ⁻⁸				

Power Supply Options

The 6RU Chassis may be fitted with a variety of power supply options. The dual 1RU power supply configuration provides redundancy with all power levels; or may be used as a non-redundant supply by utilizing fewer power supply modules. The stand-alone 1RU power supply can be used to power the 800W C-Band or 400W Ku-Band chassis. The standard 3RU, three-module power supply offers redundancy for all power levels. See the table below.

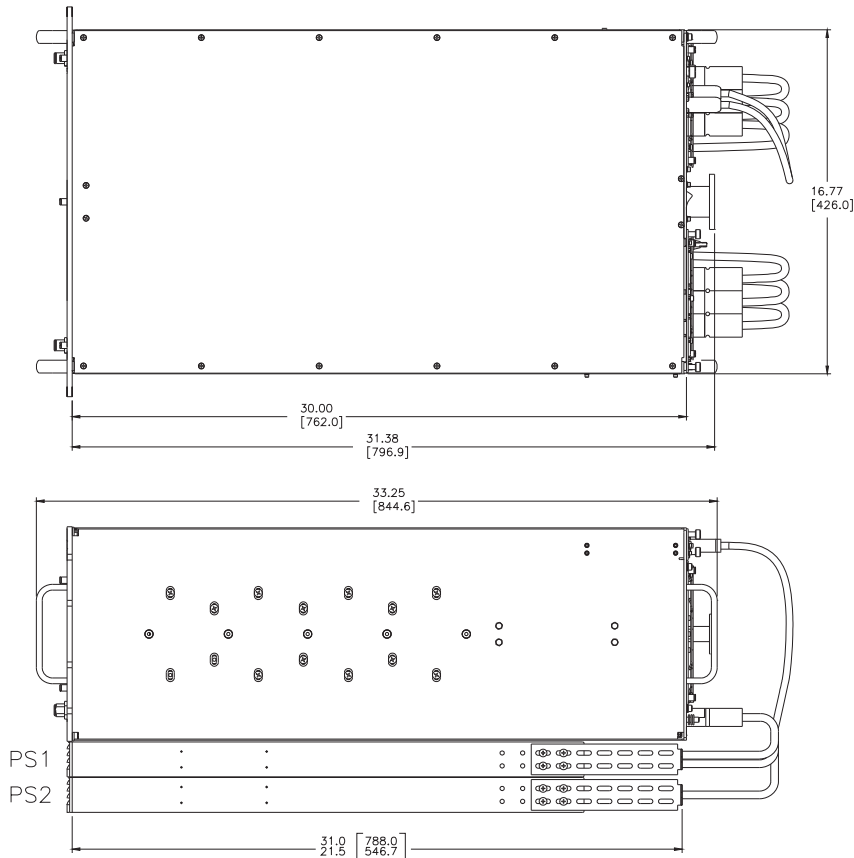

POWER SUPPLY CONFIGURATIONS

1RU NON-REDUNDANT (800W C-Band & 400W KU-Band only)				
PS1	MOD	MOD	MOD	MOD



DUAL 1RU (Redundant for 800W C-Band & 400W Ku-Band; Non-redundant for others)				
PS1	MOD	MOD	MOD	MOD
PS2	MOD	BLANK	BLANK	MOD

Note: Single pair of DC cables between PS2 and SSPA

DUAL 1RU REDUNDANT (All power levels)				
PS1	MOD	MOD	MOD	MOD
PS2	MOD	MOD	MOD	MOD


Note: Two pair of DC cables between PS2 and SSPA

3RU REDUNDANT (All power levels)				
PS1	MOD	MOD	MOD	

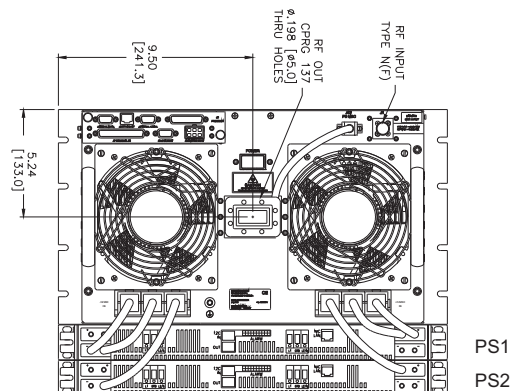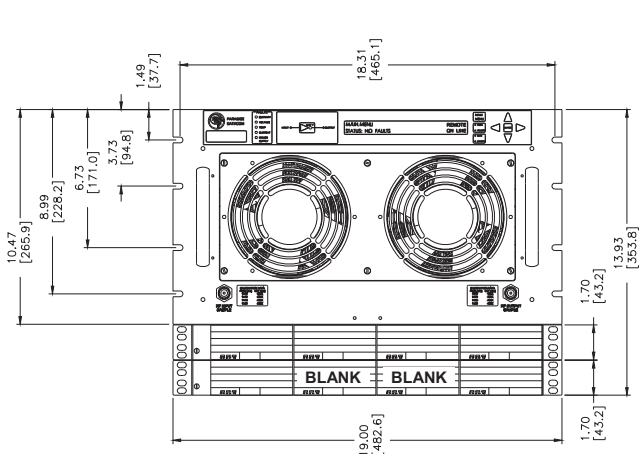


This configuration offers redundancy for the 750W C-Band and 400W Ku-Band units.

Outline Drawing, 6RU RM SSPA Chassis and dual 1RU Non-redundant Power Supply

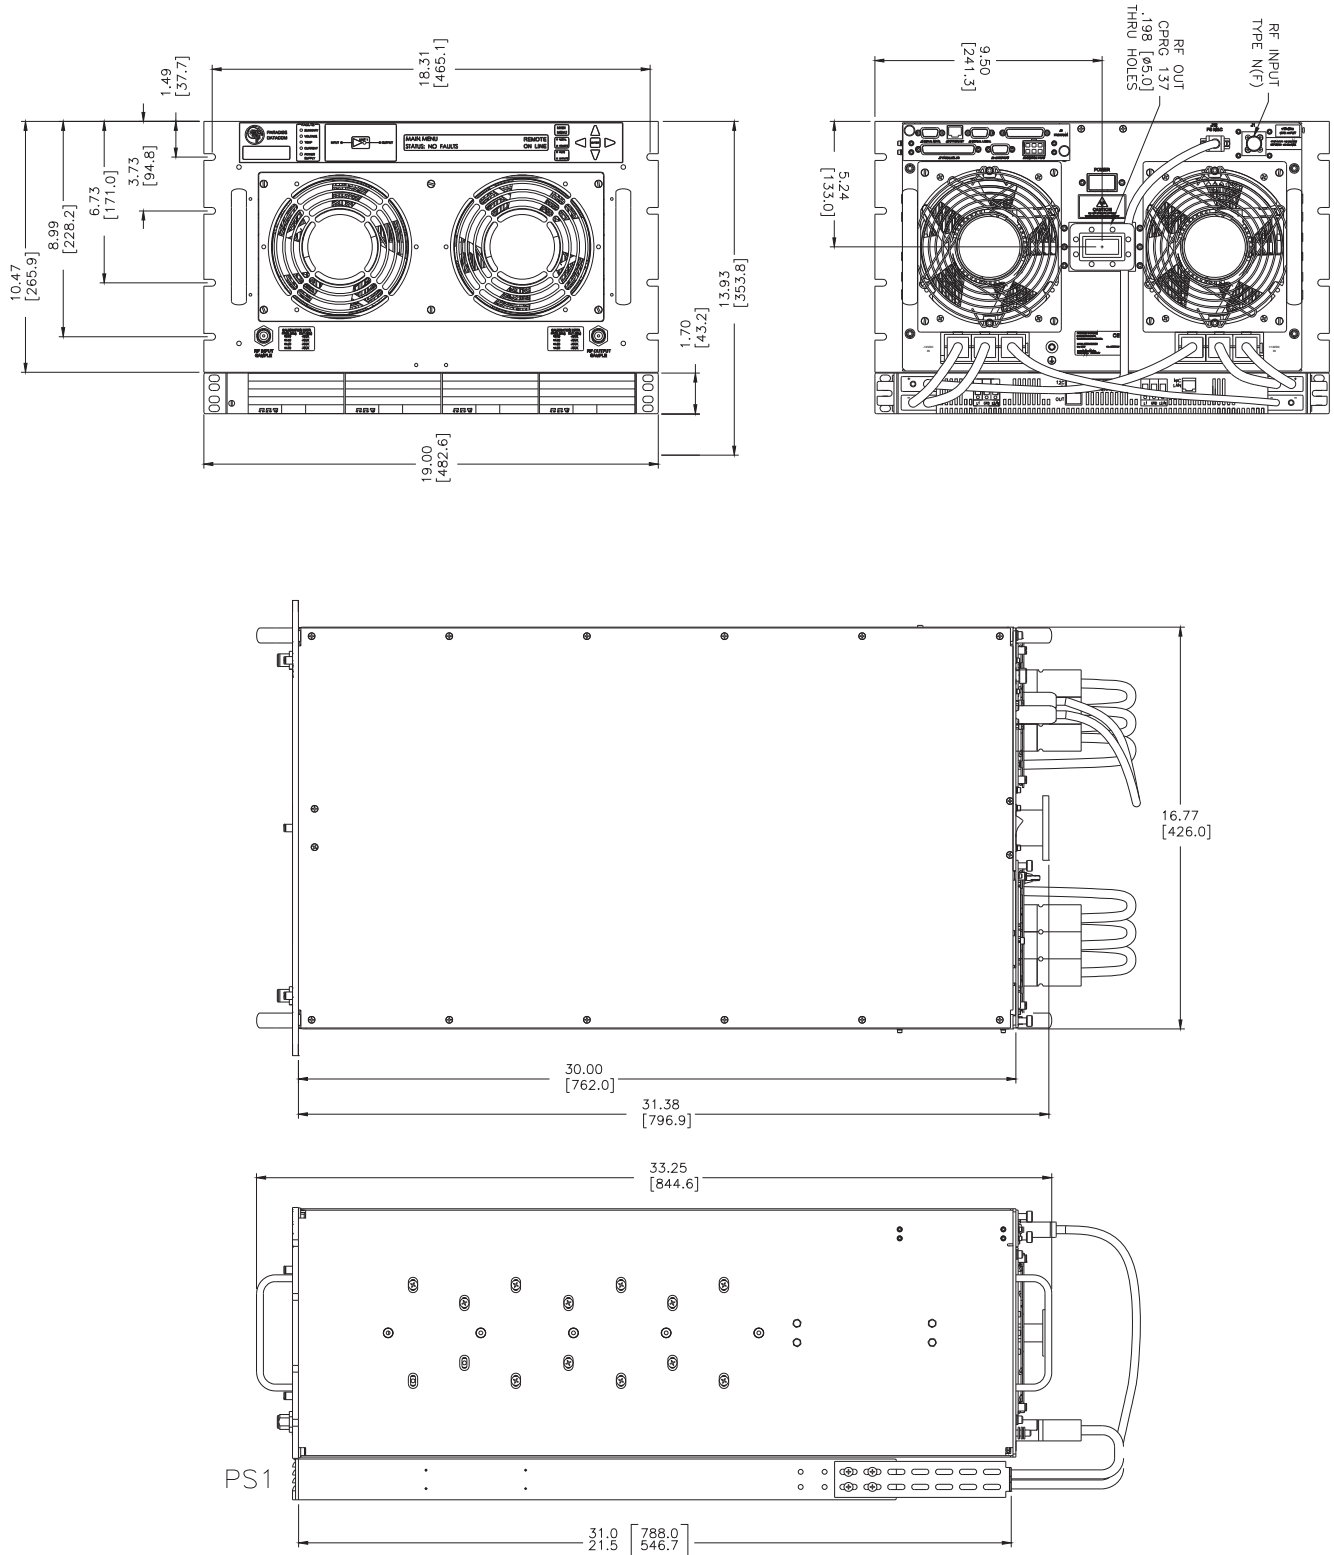


Outline Drawing, 6RU RM SSPA Chassis and 1RU Non-redundant Power Supply

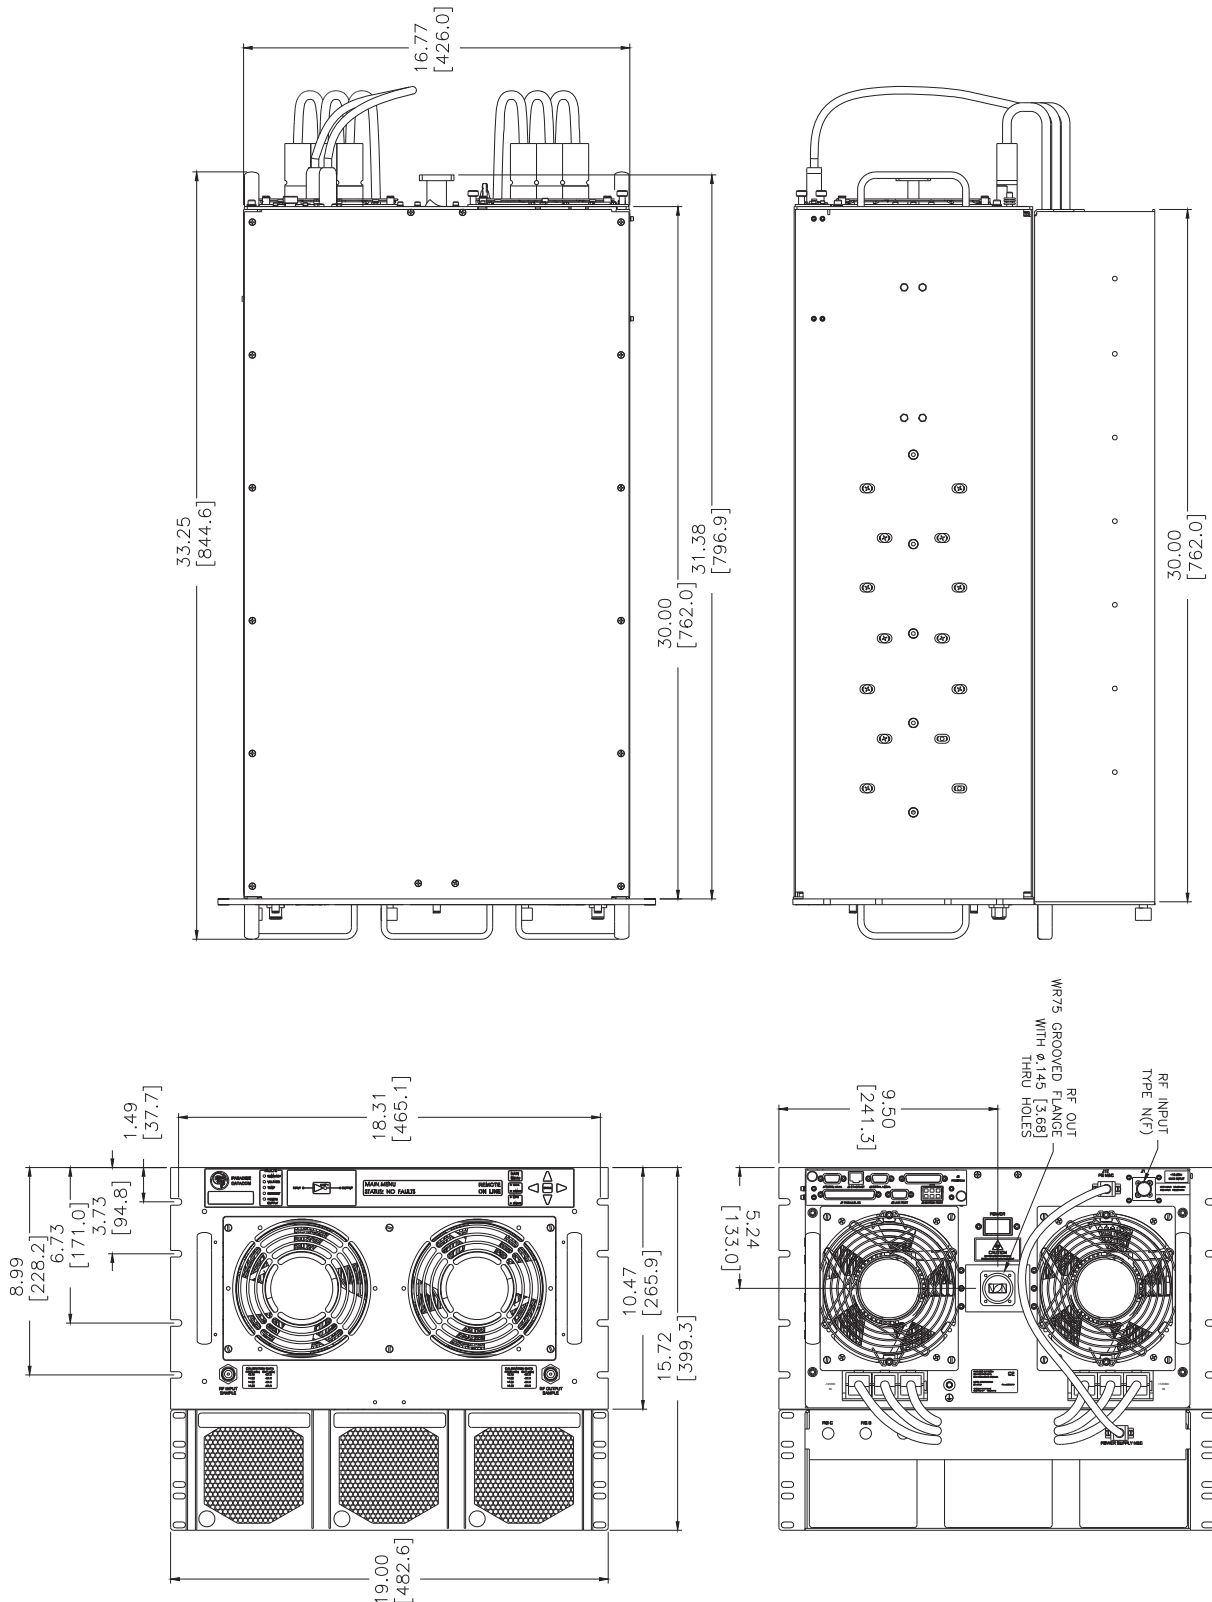

Outline Drawing, 6RU RM SSPA Chassis and 3RU Redundant Power Supply

Part Number Configuration Matrix

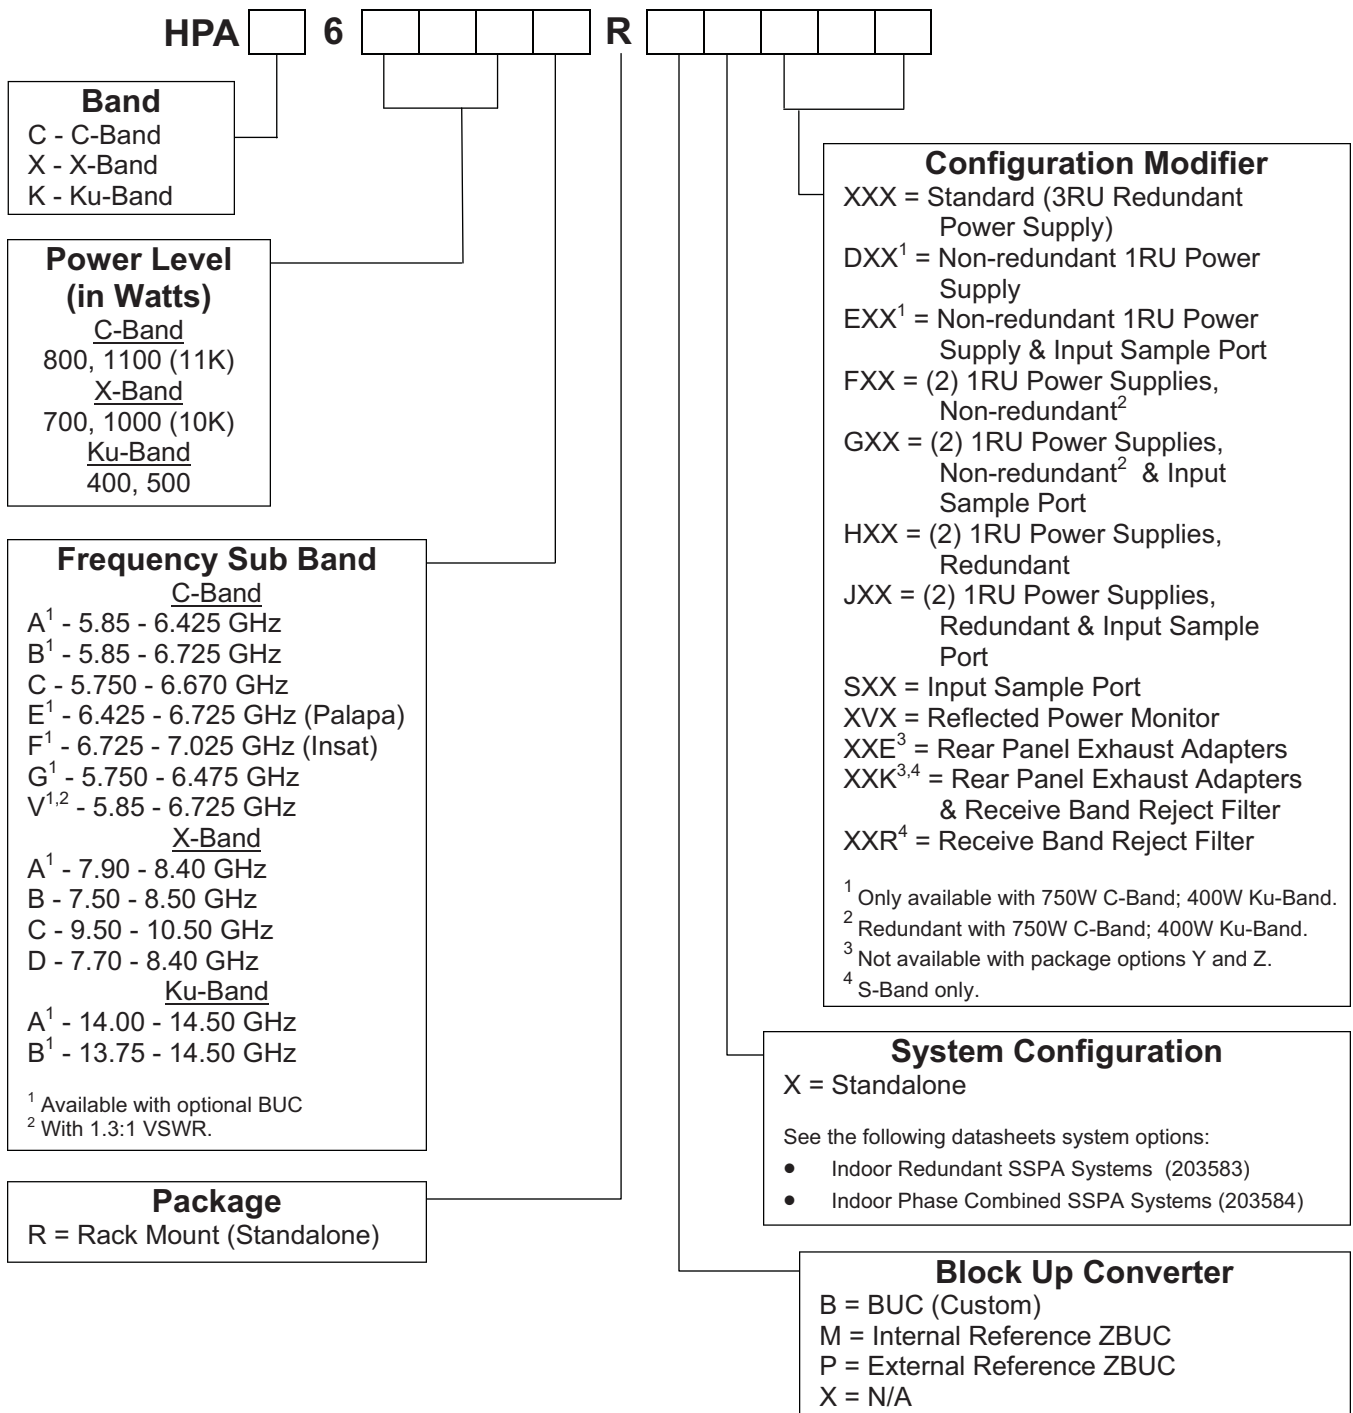

Example - A standalone 500W Extended Ku-Band high power rack mount SSPA with an optional input sample port and no block up converter is part number: **HPAK6500BRXXSXX**.