



## DESCRIPTION

**Teledyne Paradise Datacom's High Power Outdoor (W)** series SSPAs represent the latest in High Power Microwave Amplifier Technology. The SSPA package achieves the highest power density in the industry along with enhanced maintainability.

All subassemblies are accessible and replaceable in the field. Local, front panel, control is available with a user friendly interface. A full compliment of serial and parallel (contact closure) control is also available via circular connectors.

A state of the art thermal platform provides efficient cooling for the amplifier module and power supplies. This ensures the highest possible MTBFs for microwave power amplifiers.

Along with high reliability comes the ultimate in amplifier maintainability. Amplifier modules and power supplies are easily accessed and removed, making this one of the easiest amplifier assemblies to maintain in the field.

## FEATURES

- Extremely High Power Density:
  - 600W S-Band
  - 500W X-Band
  - 600W C-Band
  - 250W Ku Band
- Field Replaceable Subassemblies
- RF Output Sample Port (-40dBc)
- Ethernet Port
- RF Gain Adjustment (20 dB)
- Built-in 1:1 Redundancy Control

## OPTIONS

- RF input sample port (-10 dBc)
- 48 VDC operation
- L-Band Input operation
- Reflected Power Monitor
- Phase Combined Systems
- Fiber Optic Input
- Antenna Mounting Kit
- Receive Band Reject Filter for S-Band units up to 400W in sub-band A

## SPECIFICATIONS

- Housing:
  - 21.0 X 27.95 X 13.5 in.
  - 533 X 710 X 343 mm
  - 125.0 lbs. / 57 kg;
- White powder coat finish
- Operating temperature: -40 to +60 °C
- Relative Humidity: 100% condensing
- Integrated Forced-Air Cooling

**Buy Now!**



## S-Band Output Power Levels

| PARAMETER                                                                    | NOTES                                                                                                                                                                                                                                                                                                                                                                           | LIMITS                                                                                                                                                                                                                                                              | UNITS                                                                                           |
|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Frequency Range                                                              | Band A<br>Band B                                                                                                                                                                                                                                                                                                                                                                | 2.020 to 2.120<br>2.200 to 2.300                                                                                                                                                                                                                                    | GHz<br>GHz                                                                                      |
| Output Power @ Saturation / P <sub>1dB</sub><br>Typical / Guaranteed Minimum | Band A<br>HPAS2400AWXXXXX (2.020 - 2.090 GHz)<br>HPAS2400AWXXXXX (2.095 - 2.120 GHz)<br>HPAS2500AWXXXXX (2.020 - 2.090 GHz)<br>HPAS2500AWXXXXX (2.095 - 2.120 GHz)<br>HPAS2600AWXXXXX (2.020 - 2.090 GHz)<br>HPAS2600AWXXXXX (2.095 - 2.120 GHz)<br>Band B<br>HPAS2400BWXXXXX (2.200 - 2.300 GHz)<br>HPAS2500BWXXXXX (2.200 - 2.300 GHz)<br>HPAS2600BWXXXXX (2.200 - 2.300 GHz) | P <sub>sat</sub> /P <sub>1dB</sub><br>56.5 / 56.0 (447/400)<br>56.0 / 55.5 (400/355)<br>57.2 / 57.0 (525/500)<br>56.7 / 56.5 (468/447)<br>58.0 / 57.5 (631/560)<br>57.5 / 57.0 (560/500)<br>56.5 / 56.0 (447/400)<br>57.2 / 57.0 (525/500)<br>58.0 / 57.5 (631/560) | dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W) |
| Prime Input Power<br>Line Voltage<br>Line Frequency<br>Line Power            | Power factor corrected<br><br>HPAS2400A/BWXXXXX (180 - 265 VAC)<br>HPAS2500AWXXXXX (180 - 265 VAC)<br>HPAS2600AWXXXXX (180 - 265 VAC)                                                                                                                                                                                                                                           | 47– 63<br>1800<br>3500<br>3800                                                                                                                                                                                                                                      | Hz<br>W<br>W<br>W                                                                               |

## C-Band Output Power Levels

| PARAMETER                                                                   | NOTES                                                                                                                              | LIMITS                                                                           | UNITS                                    |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------|
| Frequency Range                                                             | (see options for extended band)                                                                                                    | 5.850 to 6.425                                                                   | GHz                                      |
| Output Power @: Saturation/P <sub>1dB</sub><br>(Typical/Guaranteed minimum) | HPAC2400AW<br>HPAC2500AW<br>HPAC2600AW                                                                                             | Psat / P1dB<br>56.0/55.0 (400/316)<br>57.0/56.0 (500/400)<br>57.8/57.0 (600/500) | dBm (W)<br>dBm (W)<br>dBm (W)<br>dBm (W) |
| Power Requirements<br>Line Voltage<br>Line Frequency<br>Line Power          | Power Factor corrected<br>Autoranging<br>HPAC2400AW (180 to 265 VAC)<br>HPAC2500AW (180 to 265 VAC)<br>HPAC2600AW (180 to 265 VAC) | > 0.9<br>47 - 63<br>2400<br>2800<br>3700                                         | Hz<br>W<br>W<br>W                        |

## X-Band Output Power Levels

| PARAMETER                                                                   | NOTES                                                                                               | LIMITS                                                    | UNITS              |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------|
| Frequency Range                                                             | (see options for extended band)                                                                     | 7.90 to 8.40                                              | GHz                |
| Output Power @: Saturation/P <sub>1dB</sub><br>(Typical/Guaranteed minimum) | HPAX2350AW<br>HPAX2500AW                                                                            | Psat / P1dB<br>55.5/54.5 (354/282)<br>57.0/55.7 (500/370) | dBm (W)<br>dBm (W) |
| Power Requirements<br>Line Voltage<br>Line Frequency<br>Line Power          | Power Factor corrected<br>Autoranging<br>HPAX2350AW (180 to 265 VAC)<br>HPAX2500AW (180 to 265 VAC) | > 0.94<br>47 - 63<br>2700<br>4000                         | Hz<br>W<br>W       |



**Digisat International Inc.**  
4195 W. New Haven Ave., Suite 15  
Melbourne, FL 32904  
USA  
+1-321-676-5250  
Email: sales@digisat.org  
<http://www.digisat.org>

## Ku-Band Output Power Levels

| PARAMETER                                                          | NOTES                                                                                               | LIMITS                                                    | UNITS              |
|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------|
| Frequency Range                                                    | (see options for extended band)                                                                     | 14.00 to 14.50                                            | GHz                |
| Output Power<br>Saturation/P1dB<br>(Typical/Guaranteed minimum)    | HPAK2200AW<br>HPAK2250AW                                                                            | Psat / P1dB<br>53.0/52.0 (200/158)<br>54.0/53.0 (250/200) | dBm (W)<br>dBm (W) |
| Power Requirements<br>Line Voltage<br>Line Frequency<br>Line Power | Power Factor corrected<br>Autoranging<br>HPAK2200AW (180 to 265 VAC)<br>HPAK2250AW (180 to 265 VAC) | > 0.94<br>47 - 63<br>2500<br>2800                         | Hz<br>W<br>W       |

## Common Specifications; HPA\_2000XW Series

### Electrical Specifications

| PARAMETER                           | NOTES                                                                                                                       | LIMITS                                      | UNITS                                                    |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------------|
| Gain                                | range                                                                                                                       | 55-75                                       | dB                                                       |
| Gain Flatness                       | full band                                                                                                                   | ±1.0                                        | dB                                                       |
| Gain Slope                          | Extended C-Band units<br>per 40 MHz (C-,X-,Ku-bands)<br>per 10 MHz (S-band)                                                 | ±1.5<br>±0.3<br>±0.2                        | dB<br>dB/40 MHz<br>dB/10 MHz                             |
| Gain Variation vs. Temperature      | -40°C to +60°C                                                                                                              | ±1.5                                        | dB                                                       |
| Gain Adjustment                     | 0.1 dB resolution                                                                                                           | 20                                          | dB                                                       |
| Intermodulation Distortion          | 3dB back off relative to P <sub>1dB</sub>                                                                                   | -25                                         | dBc                                                      |
| AM/PM Conversion                    | (@ rated P <sub>1dB</sub> )<br>(@P <sub>1dB</sub> -3dB)                                                                     | 3.5<br>1.0                                  | °/dB<br>°/dB                                             |
| Spurious<br>Harmonics               | (@ rated P <sub>1dB</sub> )<br>(@ rated P <sub>1dB</sub> -3dB) (C-,X-,Ku-bands)<br>(@ rated P <sub>1dB</sub> -3dB) (S-band) | -60<br>-50<br>-30                           | dBc<br>dBc<br>dBc                                        |
| Input/Output VSWR                   | Standard Band units<br>Extended Band units                                                                                  | 1.30:1<br>1.50:1                            |                                                          |
| Noise Figure                        | at maximum gain                                                                                                             | 10                                          | dB                                                       |
| Group Delay<br>(per 40 MHz segment) | Linear<br>Parabolic<br>Ripple                                                                                               | 0.01<br>0.003<br>1.0                        | ns/MHz<br>ns/MHz <sup>2</sup><br>ns p-p                  |
| Noise Output                        | TX Band (S-,C-, X- or Ku-Band)<br>RX Band (C- or Ku-Band)<br>RX Band (X-Band)<br>RX Band (S-Band)                           | -75<br>-150<br>-100<br>See options          | dBW/4 KHz<br>dBW/4 KHz<br>dBW/4 KHz                      |
| Residual AM Noise                   | 0 - 10 KHz<br>10 KHz - 500 KHz<br>500 KHz - 1 MHz                                                                           | -45<br>-20 (1.25 + log F)<br>-80            | dBc<br>dBc<br>dBc                                        |
| Phase Noise                         | Offset frequency from carrier<br>10 Hz<br>100 Hz<br>1 KHz<br>10 KHz<br>100 KHz<br>1 MHz                                     | -90<br>-100<br>-110<br>-120<br>-125<br>-130 | dBc/Hz<br>dBc/Hz<br>dBc/Hz<br>dBc/Hz<br>dBc/Hz<br>dBc/Hz |


### Mechanical Specifications

|        |                        |                                        |              |
|--------|------------------------|----------------------------------------|--------------|
| Size   | width X height X depth | 21.0 X 27.95 X 13.5<br>533 X 710 X 343 | inches<br>mm |
| Weight |                        | 125 (57)                               | lbs.(kg)     |
| Finish |                        | powder coat                            | white        |

Specifications are subject to change.

## Options

|                                                                                                                                      |                                                                                                                                                            |                                                                   |                        |  |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|------------------------|--|
| Extended C-Band<br>5.850 to 6.725 GHz<br>5.750 to 6.670 GHz<br>6.425 to 7.025 GHz                                                    | De-rate power by 1.0dB linearly from 6.425 to 6.725 GHz<br>De-rate power by 1.0dB linearly from 6.425 to 6.725 GHz<br>Available in power levels up to 500W | Model:<br>HPAC2XXXBWXXXXX<br>HPAC2XXXCWXXXXX<br>HPAC2XXXE/FWXXXXX |                        |  |
| Extended X-Band<br>7.70 to 8.40 GHz                                                                                                  | De-rate power by 1.0dB linearly from 7.90 to 7.70 GHz                                                                                                      | Model:<br>HPAX2XXXDWXXXXX                                         |                        |  |
| Extended Ku-Band<br>13.75 to 14.5 GHz                                                                                                | De-rate power by 1.0dB linearly from 14.0 to 13.75 GHz                                                                                                     | Model:<br>HPAK2XXXBWXXXXX                                         |                        |  |
| Reflected Power Monitor                                                                                                              | See the part number configuration to determine Model numbers for this option.                                                                              |                                                                   |                        |  |
| Receive Band Reject Filter (S-Band only)<br>Filter integrated into 400W SSPA chassis<br>500W and 600W SSPAs require external filter. | Insertion Loss<br>Rx Reject                                                                                                                                | - 0.5<br>-60                                                      | dB<br>dB               |  |
| Receive Band Noise Power Density                                                                                                     | Without optional filter<br>With optional filter                                                                                                            | -95<br>-155                                                       | dBw/4 KHz<br>dBw/4 KHz |  |

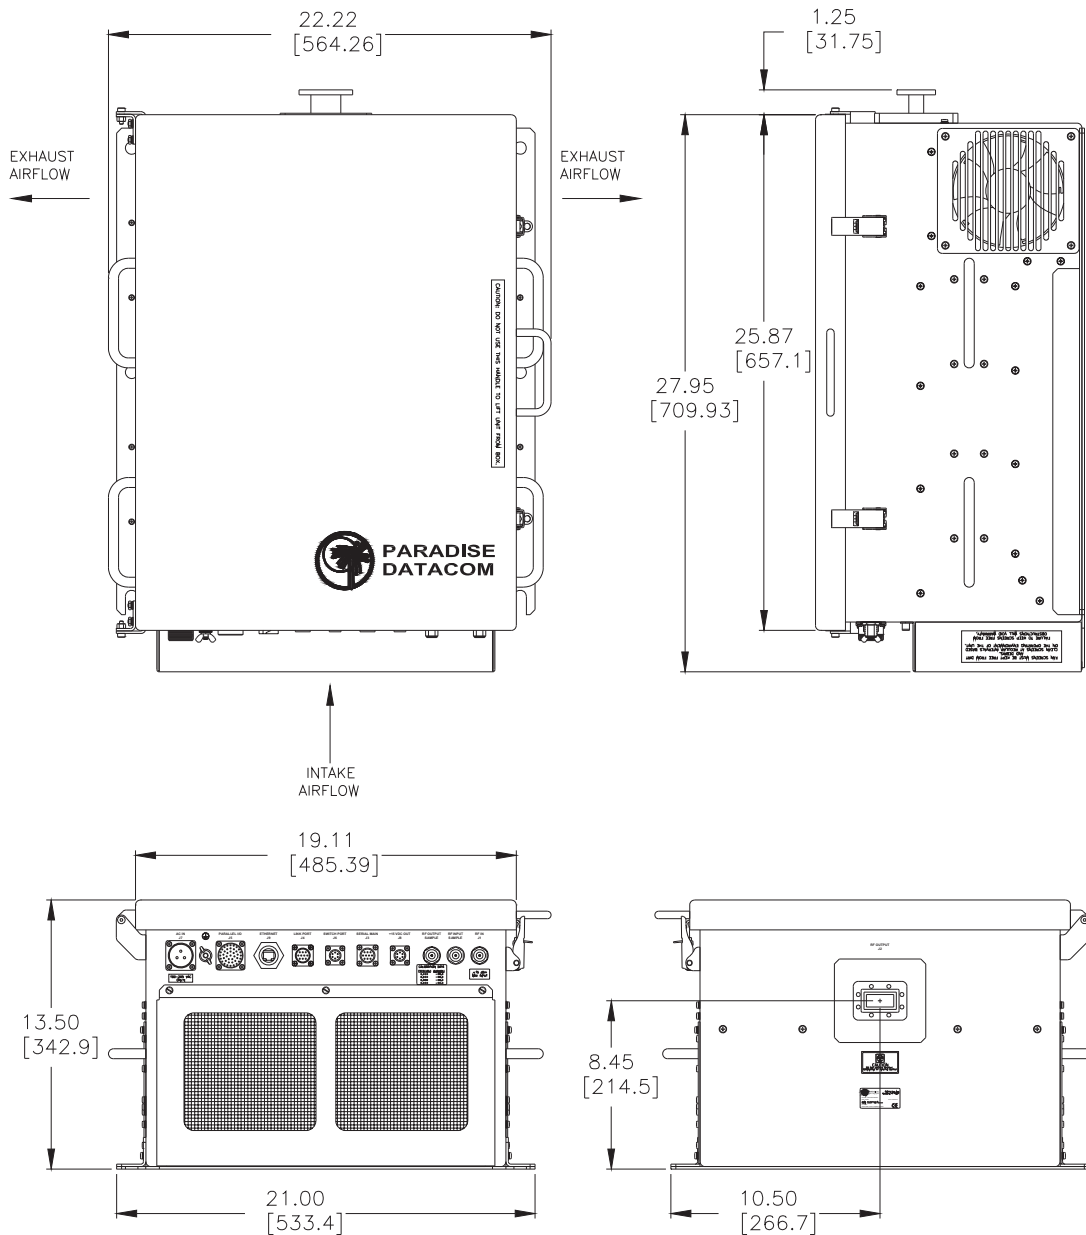

## L-Band Operation

Teledyne Paradise Datacom offers C-, X-, and Ku-Band amplifiers with an integrated L-Band Block Up Converter. The L-Band units utilize Paradise Datacom's proprietary ZBUC™ technology. The addition of a ZBUC converter to a High Power Outdoor SSPA typically increases the gain by 2-4 dB. The advantages of ZBUC™ technology include:

- A ZBUC converter can detect and switch to an externally supplied reference.
- Optional internal high stability (10MHz) reference.
- A ZBUC converter can lock to an externally supplied reference of 5, 10, 20, 25, or 50 MHz without modification.
- A ZBUC converter can accept a wide range of external reference power (-10 to +5 dBm)
- A ZBUC converter can accept FSK monitor and control signal via the IFL for complete amplifier remote control.

## Available Frequency Plans

| Band | Frequency Band    | IF Input       | LO Frequency | RF Output         | Gain Change |
|------|-------------------|----------------|--------------|-------------------|-------------|
| C    | Standard C-Band   | 950 - 1525 MHz | 4.900 GHz    | 5.850 - 6.425 GHz | 0-4 dB      |
| C    | Extended C-Band   | 950 - 1825 MHz | 4.900 GHz    | 5.850 - 6.725 GHz | 0-4 dB      |
| C    | Palapa Band       | 950 - 1250 MHz | 5.475 GHz    | 6.425 - 6.725 GHz | 0-4 dB      |
| C    | Insat Band        | 950 - 1250 MHz | 5.775 GHz    | 6.725 - 7.025 GHz | 0-4 dB      |
| C    | Extended C-Band 2 | 950 - 1675 MHz | 4.800 GHz    | 5.750 - 6.475 GHz | 0-4 dB      |
| X    | Standard X-Band   | 950 - 1450 MHz | 6.950 GHz    | 7.900 - 8.400 GHz | 0-2 dB      |
| Ku   | Standard Ku-Band  | 950 - 1450 MHz | 13.050 GHz   | 14.00 - 14.50 GHz | 0-2 dB      |
| Ku   | Extended Ku-Band  | 950 - 1700 MHz | 12.800 GHz   | 13.75 - 14.50 GHz | 0-2 dB      |

## Electrical Specifications for High Power Outdoor with ZBUC converter

| PARAMETER                 | NOTES                                                | LIMITS                |                      |                      |                       | UNITS     |
|---------------------------|------------------------------------------------------|-----------------------|----------------------|----------------------|-----------------------|-----------|
| Gain                      | Nominal setting                                      | 75                    |                      |                      |                       | dB        |
| Gain Flatness             | full band (C-,X-,Ku-bands)                           | ±2.0                  |                      |                      |                       | dB        |
| Gain Slope                | per 40 MHz (C-,X-,Ku-bands)                          | ±0.5                  |                      |                      |                       | dB/40 MHz |
| Gain Adjusted Range       |                                                      | 20                    |                      |                      |                       | dB        |
|                           | Typical C-Band Adj. Range                            | 60 - 80               |                      |                      |                       | dB        |
|                           | Typical Ku-Band Adj. Range                           | 57 - 77               |                      |                      |                       | dB        |
| Gain Stability            | -40 to +60 °C                                        | ±1.5                  |                      |                      |                       | dB        |
| Phase Noise               | Offset frequency from carrier                        | <u>Absolute max.</u>  | <u>C-band (typ.)</u> | <u>X-band (typ.)</u> | <u>Ku-band (typ.)</u> |           |
|                           | 10 Hz                                                | -30                   | -60                  | -60                  | -50                   | dBc/Hz    |
|                           | 100 Hz                                               | -60                   | -80                  | -75                  | -65                   | dBc/Hz    |
|                           | 1 KHz                                                | -70                   | -80                  | -75                  | -72                   | dBc/Hz    |
|                           | 10 KHz                                               | -80                   | -85                  | -100                 | -90                   | dBc/Hz    |
|                           | 100 KHz                                              | -90                   | -120                 | -110                 | -110                  | dBc/Hz    |
|                           | 1 MHz                                                | -90                   | -125                 | -122                 | -120                  | dBc/Hz    |
| Spurious                  | In-Band Signal Related (C-/Ku-Band)                  | -50                   |                      |                      |                       | dBc       |
|                           | (Extended C-Band)                                    | -40                   |                      |                      |                       | dBc       |
|                           | Close to Carrier Spurious (≤ 20 MHz)                 | -50                   |                      |                      |                       | dBc       |
|                           | Local Oscillator                                     | -30                   |                      |                      |                       | dBm       |
| Noise Figure              | At 75 dB gain setting                                | 20                    |                      |                      |                       | dB        |
| Input VSWR                | L-Band                                               | 1.5 : 1               |                      |                      |                       |           |
| Internal Reference Option | Reference accuracy @ 25 °C                           | ±1 • 10 <sup>-8</sup> |                      |                      |                       |           |
|                           | Reference Stability over Temperature (-40 to +40 °C) | ±1 • 10 <sup>-9</sup> |                      |                      |                       |           |

## Interface Specifications; HPA\_2000XW Series

| PARAMETER                                                                 | NOTES                                                                                                                                                            | LIMITS                                                                                                                                                             | UNITS                                                                                                        |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Monitor & Control (J5)<br>Connector: MS3112E20-41S<br>Mate: MS3116F20-41P | Parallel Port Outputs<br>Form C Relays<br>Contact conditions on fault<br>(Closed, Open, Common)<br><br>Mute Status<br>RF Switch Position<br>Parallel Port Inputs | Power Supply Fault<br>Auxiliary Fault<br>Mute Status<br>Block Up Converter Fault<br>Temperature Fault<br>Current Fault<br>Low RF Alarm                             | Pins A, B, C<br>Pins D, E, F<br>Pins G, H, J<br>Pins K, L, M<br>Pins N, P, R<br>Pins V, W, X<br>Pins a, Y, Z |
|                                                                           |                                                                                                                                                                  | Mute Input<br>Local Remote<br>Auxiliary Fault Input<br>Standby Select<br>Latched Fault Reset<br>Auto/Manual Switching<br>+5V pull-up<br>Ground                     | Pin b<br>Pin c<br>Pin d<br>Pin e<br>Pin f<br>Pin g<br>Pins h, i, j, k, m<br>Pin n                            |
| Main Serial Port (J3)<br>Connector: MS3112E12-10P<br>Mate: MS3116F12-10S  | RS232 / RS485<br>Summary Alarm                                                                                                                                   | RS232 Out, RS485 TX-<br>RS232 In, RS485 RX-<br>RS485 RX+<br>RS485 TX+<br>Service Request 1<br>Service Request 2<br>Service Request Common<br>Termination<br>Ground | Pin A<br>Pin B<br>Pin C<br>Pin D<br>Pin E<br>Pin F<br>Pin G<br>Pin H<br>Pin J                                |
| Link Port (J4)<br>Connector: MS3112E12-10S<br>Mate: MS3116F12-10P         | 1:1 Redundant System Control Link                                                                                                                                | RS485+<br>RS485-<br>Link Out<br>Link In<br>Ground                                                                                                                  | A, B<br>C, D<br>E, F<br>G, H<br>Pin J                                                                        |
| Switch Port (J6)<br>Connector: MS3112E10-6S<br>Mate: MS3116F10-6P         | Redundant Switch Control                                                                                                                                         | +28 VDC<br>RF Switch 1, pos 1<br>RF Switch 1, pos 2<br>RF Switch 2, pos 1<br>RF Switch 2, pos 2                                                                    | A, B<br>C<br>E<br>D<br>F                                                                                     |
| RF Connectors                                                             | RF Input (J1), Input & Output Sample<br>RF Output (J2)<br>HPAS2XXXXW<br>HPAC2XXXXW<br>HPAX2XXXXW<br>HPAK2XXXXW                                                   | Type N<br><br>Type N<br>WR137 Waveguide<br>WR112 Waveguide<br>WR75 Waveguide                                                                                       | Female<br><br>Female<br>CPR137G flange (PDR-70)<br>CPR112G flange (PDR-84)<br>Grooved flange (PBR-120)       |
| AC Input (J7)<br>Connector: MS3102E20-3P<br>Mate: MS3106E20-3S            | Line Power                                                                                                                                                       | Line<br>Neutral<br>Ground                                                                                                                                          | A<br>C<br>B                                                                                                  |
| Optional 48 VDC Input<br>MS3102E20A37P                                    | DC Input Power                                                                                                                                                   | +48 VDC<br>Return                                                                                                                                                  | A,B<br>C,D                                                                                                   |
| +15 VDC Output (J8)<br>Connector: MS3112E10-6S<br>Mate: MS3116F10-6P      | Auxiliary Power                                                                                                                                                  | External Fault In<br>Reserved<br>+15VDC LNA<br>Ground<br>+15VDC External<br>Ground                                                                                 | A<br>B<br>C<br>D<br>E<br>F                                                                                   |
| Ethernet Port (J9)<br>Connector: RJ45 (F)                                 | Remote M&C, UDP, SNMP                                                                                                                                            | TX+<br>TX-<br>RX+<br>RX-<br>Ground                                                                                                                                 | 1<br>2<br>3<br>6<br>4,5,7,8                                                                                  |

## Environmental Specifications

|                       |            |            |    |
|-----------------------|------------|------------|----|
| Operating Temperature | Ambient    | -40 to +60 | °C |
| Relative Humidity     | Condensing | 100        | %  |
| Cooling System        | Integrated | Forced air |    |

## Part Number Configuration

HPA   2         W          

### Band

S - S-Band  
C - C-Band  
X - X-Band  
K - Ku-Band

### Power Level (in Watts)

S-Band  
400, 500 or 600  
C-Band  
400, 500 or 600  
X-Band  
350 or 500  
Ku-Band  
200 or 250

### Frequency Sub Band

S-Band  
A - 2.020 - 2.120 GHz  
B - 2.200 - 2.300 GHz  
C-Band  
A<sup>1</sup> - 5.85 - 6.425 GHz  
B<sup>1</sup> - 5.85 - 6.725 GHz  
C - 5.75 - 6.670 GHz  
E<sup>1,2</sup> - 6.425 - 6.725 GHz (Palapa)  
F<sup>1,2</sup> - 6.725 - 7.025 GHz (Insat)  
G<sup>1</sup> - 5.750 - 6.475 GHz  
H<sup>1</sup> - 5.715 - 5.790 GHz  
J<sup>1</sup> - 5.740 - 6.650 GHz  
V<sup>1,3</sup> - 5.85 - 6.725 GHz  
X-Band  
A<sup>1</sup> - 7.90 - 8.40 GHz  
B - 7.50 - 8.50 GHz  
D - 7.70 - 8.40 GHz  
E - 7.75 - 8.50 GHz  
Ku-Band  
A<sup>1</sup> - 14.00 - 14.50 GHz  
B<sup>1</sup> - 13.75 - 14.50 GHz

<sup>1</sup> Available with optional BUC.

<sup>2</sup> Available in 400W or 500W power levels.

<sup>3</sup> With 1.3:1 VSWR.

### Configuration Modifier

XXX = Standard  
SXX = Input Sample  
XVX = Reflected Power  
Monitor  
XXR\* = Receive Band Reject  
Filter

\* S-Band only

### System Configuration

X = Standalone

See the following specification sheets for the appropriate configuration:

- Outdoor Packaged Redundant SSPA Systems (203581)
- Outdoor Packaged Phase Combined SSPA Systems (203582)

### Block Up Converter

B = BUC (Custom)  
M = Internal Reference ZBUC (FSK)  
P = External Reference ZBUC (FSK)  
X = None

An optional uni-strut  
mounting kit is available.

**Example** - A standalone 500W Extended C-Band High Power Outdoor SSPA with block up converter using an external reference is part number:  
**HPAC2500BWPXXXX.**

Specifications listed in this document are subject to change without notice.

X-Band products may be subject to ITAR restrictions and should not be exported from the U.S. without obtaining proper licensing from the appropriate government agencies.