

## ‘Comms-On-The-Move’ Satellite Modem Card

### OVERVIEW

The **Q-Lite™** is a compact, single-board satellite modem *suitable for integration into custom enclosures* for portable communications and comms-on-the-move.

The **Q-Lite™** has been designed for simple mechanical integration into OEM products, being small in physical size and with very low power consumption. It is compatible with our **Q-Flex™** and **Q-MultiFlex™** modems.

Monitoring and control of the modem is via Ethernet, with an option to fit a keypad and LCD display for local control. The **Q-Lite™** can also be provided in a half-width chassis.

### Advanced Bandwidth-Efficient Features


The **Q-Lite™** is small in size but big on features! **Paired Carrier+™** is our enhanced carrier overlap technology that allows transmit and receive carriers to occupy the same space segment.

**DVB-S2X**, is between 20% and 60% more bandwidth efficient than its predecessor, DVB-S2.

Bandwidth-saving IP features include ACM, acceleration and header and payload compression.

### Markets and Applications

- ▶ Comms-on-the-move including vehicles, aircraft and UAVs
- ▶ Portable communication systems
- ▶ Compact, low-power VSAT terminals
- ▶ Man-packs
- ▶ Broadcast news gathering
- ▶ Disaster recovery

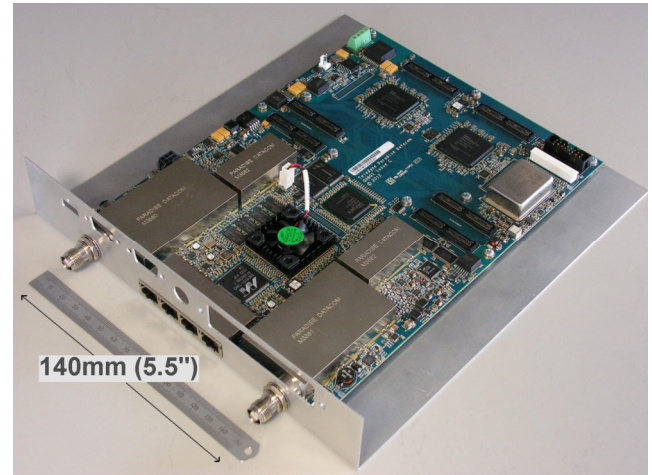

### FEATURES

- ▶ Small form factor (255mm x 184mm)
- ▶ Extended L-band operation to 2450MHz
- ▶ Data rates to 345Mbps
- ▶ Paired Carrier+™ enhanced carrier overlay
- ▶ Satellite beacon receiver mode as standard
- ▶ Optimized spectral roll-offs, including 5%
- ▶ **XStream IP™** advanced IP optimization suite including TCP & HTTP acceleration, header & payload compression, traffic shaping, encryption & ACM
- ▶ DVB-S2/S2X, **FastLink™** LDPC & TPC
- ▶ 24 Volt input power supply
- ▶ 25 to 33 Watt power consumption
- ▶ Optional keypad/LCD display & fans
- ▶ Optional L-band services (10MHz output, LNB power, external BUC PSU)
- ▶ **LinkGuard™** signal-under-carrier interference detection
- ▶ Built-in spectrum & constellation monitors
- ▶ DVB Carrier ID. Fully compliant with DVB-CID standard
- ▶ **Q-NET™ Navigator** network control application included as standard

click here to  
**REQUEST A QUOTE!**

**Satellite Modem Card**

Main Specifications	
Frequency	950 to 2450MHz (resolution 100Hz) (TNC connector)
Data Rate	<b>Standard:</b> 2,048kbps <b>Options:</b> 5Mbps, 10Mbps, 25Mbps, 60Mbps, 100Mbps, 200Mbps and 345Mbps
Data Rate Limits	<b>DVB-S2/S2X:</b> 50kbps to 345Mbps <b>FastLink™ LDPC:</b> 18kbps to 100Mbps <b>TPC:</b> 2.4kbps to 60Mbps <b>DVB-S/DSNG:</b> 100kbps to 50Mbps 1bps resolution
Symbol Rate Limits	<b>DVB-S2/S2X:</b> 100ksps to 70Msps <b>FastLink™ LDPC:</b> 18ksps to 40Msps <b>TPC:</b> 2.4ksps to 40Msps <b>DVB-S/DSNG:</b> 100ksps to 40Msps
Operating Modes	<b>DVB-S2/S2X</b> (EN 302 307-1 & EN 302 307-2) <b>Closed Network (+ ESC)</b> (IESS-315) <b>DVB-S/DSNG</b> (EN 300 421 & EN 301 210)
Impedance	50Ω
Return Loss	>15dB
Redundancy	1:1 through 1:16 redundancy ( <i>requires Utilities Card</i> )

Traffic Interfaces	
<b>Standard:</b>	<b>4-port Gigabit Ethernet switch</b> (RJ45 connectors; used for IP traffic and M&C)
<b>Options (one additional interface can be selected):</b>	<b>EIA-530</b> (RS422, X.21, V.35 and RS232 on 25-pin D-type female) <b>Quad ASI</b> (75Ω BNC female)
<i>Please contact us regarding support for other interfaces</i>	

Modulator	
Output Power	+5 to -40dBm (950 to 1950MHz) 0 to -40dBm (1950 to 2150MHz) 0 to -30dBm (2150 to 2450MHz) (0.1dB steps)
Output Power Stability/Accuracy	<b>Stability:</b> ±1.0dB, 0°C to 50°C <b>Accuracy:</b> ±0.375dBm
Transmit Filter Roll-off	5%, 10%, 15%, 20%, 25%, 35%
Phase Accuracy	±2° maximum
Amplitude Accuracy	±0.2dB maximum
Carrier Suppression	-30dBc minimum
Output Phase Noise	As EN 302 307, EN 300 421, IESS-308 & EN 301 210; minimum 16dB better than IESS-308/309
Harmonics & Spurious	Better than -55dBc/4kHz in-band (at 0dBm to -30dBm output)
Transmit On/Off Ratio	-65dB minimum
BUC PSU Option	24V or 48V DC via IFL cable, 200W
BUC 10MHz Reference	Via IFL cable; 10MHz ± 0.01 ppm; 2dBm ± 2dBm
FSK Control	Allows monitor & control of a compatible L-band BUC from the modem via the Tx IFL cable ( <i>requires Utilities Card</i> )

Demodulator	
Input Range (dBm)	<b>Minimum:</b> -140 + 10 log (symbol rate) <b>Maximum:</b> -68 + 10 log (symbol rate)
Maximum Composite	+10dBm
Wanted-to-composite	-102 + 10 log (symbol rate)
Frequency Sweep Width	±1kHz to ±255kHz (1kHz steps)
Acquisition Time	Dependent on FEC, data rate and sweep width
Receive Filter Roll-off	5%, 10%, 15%, 20%, 25%, 35%
Antenna Pointing Output	Scalable 0 to 10V DC output signal of the wanted Rx power level, composite Rx signal level, demodulator AGC level or Eb/No level for antenna peaking/pointing ( <i>requires Utilities Card or Antenna Pointing Card</i> )
LNB 10MHz Reference	Via IFL cable; 10MHz ± 0.01 ppm; 2dBm ± 2dBm
LNB Voltage	Selectable 13V, 15V, 18V, 20V or 24V DC to LNB via IFL cable; maximum 0.5A

ClearLinQ™ Adaptive Tx Predistorter	
Corrects for linear & non-linear distortion in the RF chain (i.e. amplifier and transponder). Applicable to all FECs and modulations. Maximises amplifier linear output power; minimises required back-off. Up to 2dB performance gain	

DVB-S2/S2X Rx Adaptive Equaliser	
Corrects for slope on the carrier and group delay (typically found at transponder edges, causing inter-symbol interference). The 9-tap Rx equaliser is provided as standard; automatically switched on above 10Msps	

DVB Carrier ID Option (ETSI TS 103 129)	
Supports the identification of interfering carriers. Allows identification of individual modem carriers by superimposing a low-power CID waveform onto the carrier with negligible degradation. <b>Supported for all carriers.</b> The CID waveform contains a unique Carrier ID and other identity information. A carrier monitoring system is required to decode CID waveforms	

Utilities Card	
Add-on card size: 168mm x 104mm	
9-way D type for 1:1 and 1:N redundancy (compatible with Q-NET PDQS Redundancy Switch)	
15-way D type for alarms (4 independent Form C relays for unit, Tx, Rx and deferred alarms), Tx Inhibit signal and scalable DC voltage output for antenna pointing USB connector for software upgrades, etc.	
Second fan for environments where extra cooling is required	
FSK signalling	


Paired Carrier+™ Option	
Paired Carrier+™ (25kHz to 72MHz occupied bandwidth)	Transmit and receive carriers are overlaid in the same space segment. Echo cancellation techniques are used to cancel the unwanted transmit carrier, leaving the wanted receive carrier
Paired Carrier+™ data rate options	256kbps, 512kbps, 1024kbps, 2.5Mbps, 5Mbps, 10Mbps, 15Mbps, 20Mbps, 25Mbps, 30Mbps, 40Mbps, 50Mbps, 60Mbps, 80Mbps, 100Mbps, 200Mbps and 345Mbps traffic rate
Carrier Asymmetry	<b>Power:</b> -10dB to +10dB <b>Symbol rate:</b> Up to 12:1
Eb/No Degradation	Typically less than 0.1dB
Delay Range	0 to 330ms
Mobile Operation	Uses GPS data to continually recalculate position relative to satellite, allowing uninterrupted operation in mobile environments anywhere in satellite footprint

Test Facilities and Alarm Outputs	
Built-in Test Tools	As part of built-in web server: Beacon receiver function; Rx constellation monitor; Rx spectrum analyser; <b>LinkGuard™</b> Signal-Under-Carrier interference detection; beacon receiver function that provides automatic detection of satellite beacon transmissions; time graphs for key performance indicators (IP throughput, Eb/No, etc.)
BER Tester	Bit error rate tester operates over main traffic or ESC channel, allowing BER monitoring while on traffic. Not available in DVB-S2/S2X modes. Supports various test patterns compatible with common BER testers
Other test modes	Transmit CW Transmit alternate 1-0 pattern Simulated satellite delay for TCP/IP packets
Alarm Relays	4 independent Form C relays for unit, Tx, Rx and deferred alarms ( <i>requires Utilities Card</i> )

Mechanical/Environmental	
Size	255mm x 184mm
Weight	0.35kg
Power Supply	24 Volt DC input (not provided) Consumes 25 to 33 Watts
Compliances	FCC, CE and RoHS compliant
Safety Standards	EN60950-1:2006
Emissions & Immunity	<b>Emissions:</b> EN55022:2010 Class B <b>Immunity:</b> EN55024:2010
Operating & Storage Temperature	-40°C to 85°C ( <i>applies to Q-Lite card and all options other than: front panel, Quad ASI card &amp; BUC PSU options, which operate 0 to 50°C only</i> )
Humidity	95% relative humidity, non-condensing
Conformal Coating	Available as an option; uses HumiSeal® 1B31 coating
Shock & Vibration	Certification to relevant part of MIL-810G currently in progress
Design & Production Facility Certification	Both the design and production facilities are ISO9001 certified; the production facility is additionally AS9100 certified (giving parts traceability)

**Beacon Receiver Function**

Q-Lite™ detects satellite beacon transmissions down to very low signal levels. This helps with automatic antenna pointing and removes the need for a separate beacon receiver.

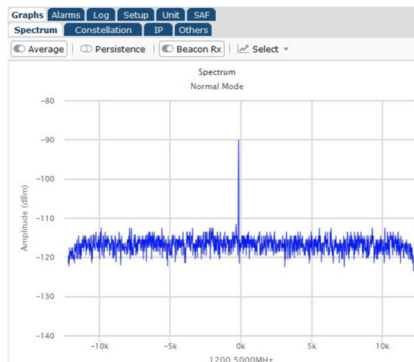


Ethernet: Standard Features	
Bridging and Static Routing	<b>Trunking mode:</b> Hardware Layer 2 switch supporting 345Mbps bi-directional traffic at up to 700,000 packets per second; zero jitter <b>Layer 2 bridge &amp; Layer 3 router:</b> Software processing capability of up to 150,000 packets per second
IPv4/IPv6	Dual IPv4/IPv6 TCP/IP supporting IPv4/IPv6 bridging and routing
VLAN Support	IEEE 802.1q VLAN support IEEE 802.1p packet prioritisation using strict priority or fair weighting queuing
Software Defined Network Support	OpenFlow and other WA-SDN protocols provide support for network virtualisation; see Q-NET Satellite Network Solution whitepaper for more details
DHCP	DHCP client for automatic allocation of M&C IP address; DHCP server allocates IP addresses to network devices
NAT	NAT firewall; allows all network devices to share a single IP address when viewed from other end of satellite link
SNMP	SNMP v1, v2c & v3
Access Control Lists	Separate IP and MAC address black/white user access control lists
Network Time Protocol (NTP)	NTP client synchronises modem time & date to NTP server; provides millisecond accuracy
IEEE 1588 V2 Precision Time Protocol (PTP)	PTP hardware implementation with nanosecond-resolution timestamping provides sub-microsecond accurate clock synchronisation; modem implements a PTP boundary clock, operating in both master & slave modes
Web Server	Modem web server M&C interface (including built-in tools listed under Test Facilities)
AAA RADIUS Secure User Login	Authentication, Authorisation & Accounting. Greater access control & accountability. Replaces standard modem login with user's personal network login credentials
IP Metrics	Tx, Rx throughput (bps, pps) graphs; dropped, errored packet counts
sFlow Performance Metrics	sFlow is the industry standard for network monitoring, giving full modem performance visibility to sFlow compatible network management devices
Active Queue Management (AQM)	Implements CoDel (controlled delay) which overcomes buffer bloat by maintaining a constant delay through the modem for all IP packets
MPEG over IP	Supports the efficient transfer of SMPTE 2002-2 MPEG2 transport streams over satellite
OpenAMIP Protocol Support	Controls modem interaction with compliant antenna control units to support antenna deployment/pointing/tracking
Virtual Routing & Forwarding	VRF supports multiple modem routing tables, allowing inter-VLAN routing
Packet Generator/Analyser	Generates & analyses TCP & UDP packet streams, allowing modem-to-modem IP testing without any PCs
Ethernet MTU Size	10k bytes



Ethernet: XStream IP™ Option	
<i>XStream IP™ is an integrated set of IP optimization and traffic management features designed for maximum reliability and bandwidth efficiency. The maximum throughput depends on features enabled &amp; traffic format</i>	
Traffic Shaping	Provides guaranteed throughput for priority traffic; supports Committed and Burst Information Rates. Stream classification by VLAN ID, IP address, IEEE 802.1p priority, Diffserv DSCP, PID & MPLS EXP
Header Compression	Robust Header Compression (RFC 3095). Reduces Ethernet/IP/UDP/TCP/RTP header sizes typically by 90%. 1-way packet processing limit: 60,000 pps; 2-way limit: 45,000 pps. Includes Ethernet header compression (compresses 14-byte Ethernet frame to typically one byte)
Payload Compression	Uses Deflate algorithm (RFC 1951) to compress TCP & UDP packets; typical payload compression of 50%
Dynamic Routing	RIP V1, V2; OSPF V2, V3; BGP V4
TCP Acceleration	Typical throughput level of 90% of link capacity. Supports 10,000 concurrent accelerated TCP connections (plus at least 40,000 unaccelerated TCP connections) up to 100Mbps
HTTP Acceleration	Speeds up download of web pages to web browsers; includes DNS caching
AES-256 Encryption	<i>Supported on Q-LiteE™ model only. The Q-LiteE™ is identical to the Q-Lite™ in every other respect</i>



Ethernet: XStream IP™ DVB-S2X	
<i>Provided as standard as part of DVB-S2/S2X</i>	
ACM	Dynamically varies modcod with varying link conditions, maximises throughput at all times by converting unused link margin into additional throughput; 100% link availability
VCM	Supports transmission/reception of two ASI streams or, one ASI stream with one IP stream, each with its own modcod for optimal throughput
IP-over-DVB Encapsulation	Supports the transmission of IP packets with/without Ethernet frames over DVB-S2/S2X; encapsulates & decapsulates using GSE (see below), MPE (EN 301 192), ULE (RFC 4326) or Paradise XStream Encapsulation
GSE Encapsulation	Highly efficient encapsulation of IP packets or Ethernet frames; compatible with EN 302 307-2 standard, for use with DVB-S2 and DVB-S2X


Network Control	
<i>Web browser user interface support is provided as standard. SNMP and command line interfaces support the development of third-party user interfaces. In addition, the following network control application options are available</i>	
Q-NET™ Navigator	Allows all modems and third-party network devices to be fully controlled through a single application. It provides an easy-to-navigate site map, summary status reporting, etc. Provided as standard, free of charge



*Built-in Spectrum Analyser showing LinkGuard™ Signal-Under-Carrier interference detection without/with interferer present.*

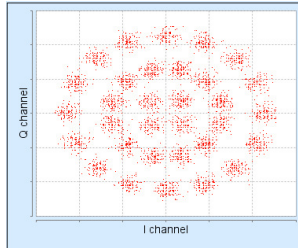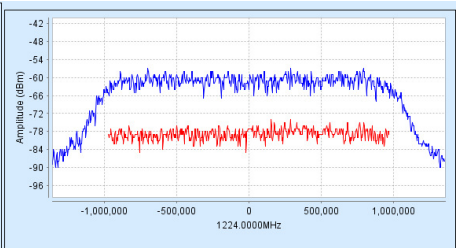


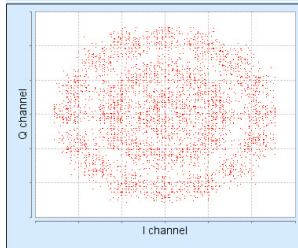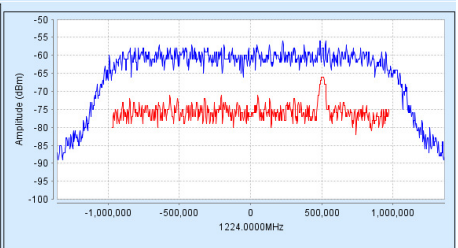


### Network Control: Q-NET™ Navigator

**Q-NET™ Navigator** supports monitor and control of all Paradise modems and third-party network devices from a single application. Includes easy-to-use navigation, support for multiple operator roles/access levels, continuous status/alarm polling and full access to all modem features. **Q-NET™ Navigator** is included as standard, free of charge.

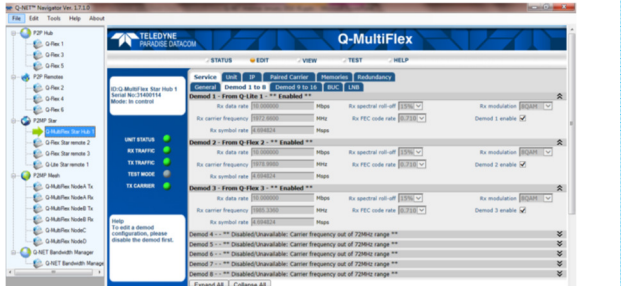

Forward Error Correction	
DVB-S2X (EN 302 307-2)  <i>Includes sup-port for DVB-S2</i>	<b>Normal Frame:</b> QPSK 13/45, 9/20, 11/20 8PSK 23/36, 25/36, 13/18 8APSK-L 5/9, 26/45 16APSK 26/45, 3/5, 28/45, 23/36, 25/36, 13/18, 7/9, 77/90 16APSK-L 5/9, 8/15, 1/2, 3/5, 2/3 32APSK 32/45, 11/15, 7/9 32APSK-L 2/3 64APSK 11/15, 7/9, 4/5, 5/6 64APSK-L 32/45 <b>Short Frame:</b> QPSK 11/45, 4/15, 14/45, 7/15, 8/15, 32/45 8PSK 7/15, 8/15, 26/45, 32/45 16APSK 7/15, 8/15, 26/45, 3/5, 32/45 32APSK 2/3, 32/45
DVB-S2X Advanced Modulation	<b>Normal Frame:</b> 128APSK 3/4, 7/9 256APSK 32/45, 3/4 256APSK-L 29/45, 2/3, 31/45, 11/15
DVB-S2 (EN 302 307-1)	QPSK 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK 3/4, 4/5, 5/6, 8/9, 9/10
FastLink™ Low-Latency LDPC	<b>BPSK</b> 0.499 <b>(O)QPSK</b> 0.532, 0.639, 0.710, 0.798 <b>8PSK/8QAM</b> 0.639, 0.710, 0.778 <b>16APSK/16QAM</b> 0.726, 0.778, 0.828, 0.851 <b>32APSK</b> 0.778, 0.828, 0.886, 0.938 <b>64QAM</b> 0.828, 0.886, 0.938, 0.960
TPC	<b>BPSK</b> 5/16, 21/44, 3/4, 7/8 <b>(O)QPSK</b> 5/16, 21/44, 3/4, 7/8, 0.93 <b>8PSK</b> 3/4, 7/8, 0.93 <b>8QAM</b> 3/4, 7/8, 0.93 <b>16QAM</b> 3/4, 7/8, 0.93
DVB-S/DSNG	<b>DVB-S:</b> QPSK 1/2, 2/3, 3/4, 5/6, 7/8 <b>DVB-DSNG:</b> 8PSK 2/3, 5/6, 8/9; 16QAM 3/4, 7/8 (ETSI EN 300421/ 301210 compliant)

TPC Performance Eb/No (dB) at BER 5E-8					
	Rate 1/2	Rate 3/4	Rate 7/8	Rate 0.93	
BPSK, (O)QPSK	3.0	4.2	4.2	6.5	
8PSK		6.3	6.8	9.6	
8QAM		6.7	6.8	10.1	
16QAM		7.6	7.9	10.4	

DVB-S/DSNG Performance Eb/No (dB) at QEF						
	Rate 1/2	Rate 2/3	Rate 3/4	Rate 5/6	Rate 7/8	Rate 8/9
QPSK	3.9	4.6	4.0	4.6	5.3	
8PSK		6.9		8.9		9.4
16QAM			9.0		10.7	

DVB-S2 Performance QEF (PER 10e-7) Normal frames, Pilots off		
	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 1/4	0.490243	1.1 (-2.0)
QPSK 1/3	0.656448	0.7 (-1.1)
QPSK 2/5	0.789412	0.7 (-0.3)
QPSK 1/2	0.988858	1.1 (1.1)
QPSK 3/5	1.188304	1.7 (2.4)
QPSK 2/3	1.322253	2.0 (3.2)
QPSK 3/4	1.487473	2.4 (4.1)
QPSK 4/5	1.587196	2.6 (4.6)
QPSK 5/6	1.654663	3.0 (5.2)
QPSK 8/9	1.766451	3.7 (6.2)
QPSK 9/10	1.788612	3.9 (6.4)
8PSK 3/5	1.779991	3.5 (6.0)
8PSK 2/3	1.980636	4.0 (7.0)
8PSK 3/4	2.228124	4.6 (8.1)
8PSK 5/6	2.478562	5.6 (9.5)
8PSK 8/9	2.646012	6.6 (10.8)
8PSK 9/10	2.679207	6.9 (11.2)
16APSK 2/3	2.637201	5.2 (9.4)
16APSK 3/4	2.966728	5.8 (10.5)
16APSK 4/5	3.165623	6.2 (11.2)
16APSK 5/6	3.300184	6.6 (11.8)
16APSK 8/9	3.523143	7.5 (13.0)
16APSK 9/10	3.567342	7.8 (13.3)
32APSK 3/4	3.703295	7.3 (13.0)
32APSK 4/5	3.951571	7.8 (13.8)
32APSK 5/6	4.119540	8.4 (14.5)
32APSK 8/9	4.397854	9.4 (15.8)
32APSK 9/10	4.453027	9.6 (16.1)

FastLink™ Performance at BER 5E-8 (Note: * denotes BER of 5E-12)					
	FEC Rate	Spectral Efficiency	Low BER Eb/No & Es/No	Balanced Eb/No & Es/No	Low Latency Eb/No & Es/No
BPSK	0.499	0.499	2.1 (-0.9)	2.9 (-0.1)	3.4 (0.4)
(O)QPSK	0.532	1.064	2.1 (2.4)	2.6 (2.9)	2.9 (3.2)
(O)QPSK	0.639	1.278	2.4 (3.5)	2.8 (3.8)	3.2 (4.3)
(O)QPSK	0.710	1.42	2.7 (4.2)	3.2 (4.7)	3.7 (5.2)
(O)QPSK	0.798	1.596	3.1 (5.1)	3.9 (6.0)	4.2 (6.2)
8PSK	0.639	1.917	5.4* (8.2)	5.9* (8.7)	6.3* (9.1)
8PSK	0.710	2.13	5.6* (8.9)	5.5 (8.8)	5.8 (9.1)
8PSK	0.778	2.334	5.6 (9.3)	6.1 (9.7)	6.4 (10.1)
8QAM	0.639	1.917	4.4 (7.2)	4.8 (7.6)	5.0 (7.8)
8QAM	0.710	2.13	5.0 (8.3)	5.3 (8.6)	5.5 (8.8)
8QAM	0.778	2.334	5.5 (9.2)	5.9 (9.6)	6.1 (9.8)
16APSK	0.726	2.904	7.6* (12.2)	7.5* (12.1)	7.5 (12.1)
16APSK	0.778	3.112	7.8* (12.7)	7.1 (12.0)	7.5 (12.4)
16APSK	0.828	3.312	7.4 (12.6)	8.1 (13.3)	8.4 (13.6)
16APSK	0.851	3.404	7.9 (13.2)	8.3 (13.6)	8.8 (14.1)
16QAM	0.726	2.904	7.2* (11.8)	6.6 (11.2)	6.8 (11.4)
16QAM	0.778	3.112	6.7 (11.6)	7.1 (12.0)	7.4 (12.3)
16QAM	0.828	3.312	7.2 (12.4)	7.7 (12.9)	8.0 (13.2)
16QAM	0.851	3.404	7.5 (12.8)	8.0 (13.3)	8.4 (13.7)
32APSK	0.778	3.89	9.8* (15.7)	9.6 (15.5)	10.0 (15.9)
32APSK	0.828	4.14	9.8 (16.0)	10.6 (16.8)	10.9 (17.1)
32APSK	0.886	4.43	10.8 (17.3)	11.4 (17.9)	11.9 (18.4)
32APSK	0.938	4.69	12.6 (19.3)	13.2 (19.9)	13.9 (20.6)

DVB-S2X Performance QEF (PER 10e-7) Normal frames, Pilots off		
	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 13/45	0.567805	0.5 (-2.0)
QPSK 9/20	0.889135	0.9 (0.4)
QPSK 11/20	1.088581	1.1 (1.5)
8APSK-L 5/9	1.647211	3.1 (5.3)
8APSK-L 26/45	1.713601	3.2 (5.5)
8PSK 23/36	1.896173	3.6 (6.4)
8PSK 25/36	2.062148	4.1 (7.2)
8PSK 13/18	2.145136	4.3 (7.6)
16APSK-L 1/2	1.972253	3.4 (6.3)
16APSK-L 8/15	2.104850	3.5 (6.7)
16APSK-L 5/9	2.193247	3.6 (7.0)
16APSK-L 3/5	2.370043	3.9 (7.6)
16APSK-L 2/3	2.635236	4.4 (8.6)
16APSK 26/45	2.281645	4.2 (7.8)
16APSK 3/5	2.370043	4.4 (8.1)
16APSK 28/45	2.458441	4.2 (8.1)
16APSK 23/36	2.524739	4.6 (8.6)
16APSK 25/36	2.745734	5.2 (9.6)
16APSK 32/45	2.856231	5.4 (10.0)
16APSK 7/9	3.077225	6.0 (10.9)
16APSK 77/90	3.386618	7.0 (12.3)
32APSK-L 2/3	3.289502	6.5 (11.7)
32APSK 32/45	3.510192	6.5 (12.0)
32APSK 11/15	3.620536	6.7 (12.3)
32APSK 7/9	3.841226	7.5 (13.3)
64APSK-L 32/45	4.206428	8.4 (14.6)
64APSK 11/15	4.338659	8.9 (15.3)
64APSK 7/9	4.603122	9.3 (15.9)
64APSK 4/5	4.735354	9.5 (16.3)
64APSK 5/6	4.933701	10.3 (17.2)

DVB-S2 Performance QEF (PER 10e-7) Short frames, Pilots off		
	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 1/4	0.365324	2.2 (-2.2)
QPSK 1/3	0.629060	1.3 (-0.7)
QPSK 2/5	0.760928	1.1 (-0.1)
QPSK 1/2	0.848840	1.6 (0.9)
QPSK 3/5	1.156532	2.1 (2.7)
QPSK 2/3	1.288400	2.3 (3.4)
QPSK 3/4	1.420269	2.9 (4.4)
QPSK 4/5	1.508181	3.1 (4.9)
QPSK 5/6	1.596093	3.5 (5.5)
QPSK 8/9	1.727961	4.0 (6.4)
8PSK 3/5	1.725319	4.0 (6.4)
8PSK 2/3	1.922040	4.5 (7.3)
8PSK 3/4	2.118761	5.1 (8.4)
8PSK 5/6	2.381056	6.0 (9.8)
8PSK 8/9	2.577777	7.0 (11.1)
16APSK 2/3	2.548792	5.6 (9.7)
16APSK 3/4	2.809662	6.2 (10.7)
16APSK 4/5	2.983575	6.7 (11.4)
16APSK 5/6	3.157488	7.1 (12.1)
16APSK 8/9	3.418357	8.1 (13.4)
32APSK 3/4	3.493093	8.1 (13.5)
32APSK 4/5	3.709309	8.7 (14.4)
32APSK 5/6	3.925256	9.0 (14.9)
32APSK 8/9	4.249850	10.2 (16.5)


DVB-S2X Performance QEF (PER 10e-7) Short frames, Pilots off		
	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 11/45	0.453236	1.4 (-2.0)
QPSK 4/15	0.497192	1.3 (-1.7)
QPSK 14/45	0.585104	1.1 (-1.2)
QPSK 7/15	0.892796	1.4 (0.9)
QPSK 8/15	1.024664	1.7 (1.8)
QPSK 32/45	1.376313	2.6 (4.0)
8PSK 7/15	1.331876	3.1 (4.3)
8PSK 8/15	1.528597	3.4 (5.2)
8PSK 26/45	1.659745	3.8 (6.0)
8PSK 32/45	2.053188	4.8 (7.9)
16APSK 7/15	1.766184	4.0 (6.5)
16APSK 8/15	2.027053	4.4 (7.5)
16APSK 26/45	2.200966	4.8 (8.2)
16APSK 3/5	2.287923	5.0 (8.6)
16APSK 32/45	2.722705	5.8 (10.2)
32APSK 2/3	3.168769	6.8 (11.8)
32APSK 32/45	3.384985	7.3 (12.6)

**PER v BER**

Note: A PER of 10e-7 is equivalent to a BER of 6.6 x 10e-11.

**Interference Mitigation: ClearLinQ™**

'Before and after' constellations showing ClearLinQ™ Adaptive Tx Predistort-er compensating for severe non-linear signal distortion to a 32APSK carrier.

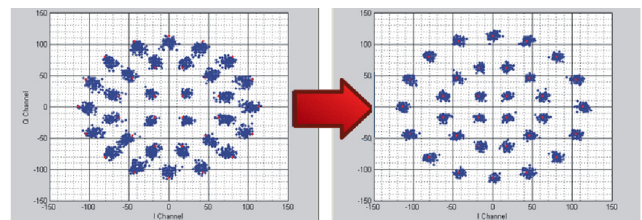

	Option	Description	Fully configurable - pay only for what you need!
Provided as standard	✓	<p><b>4.8kbps to 2.048Mbps Closed Network (+ ESC) modem with 4-port Ethernet 10/100/1000 BaseT switch for M&amp;C and traffic</b></p> <p><b>All features described under Ethernet Standard Features</b></p> <p><b>L-band operation 950 to 2450MHz:</b> high-G 10MHz reference (with G sensitivity rating of 1 x10<sup>-9</sup>/g)</p> <p><b>TPC:</b> BPSK, QPSK, OQPSK, 8PSK, 8QAM and 16QAM; to 60Mbps subject to prevailing modem data rate</p> <p><b>AUPC:</b> Automatic Uplink Power Control</p> <p><b>All features described under Test Facilities</b></p> <p><i>When connected to the output of an external BUC PSU (not provided), the Q-Lite™ can provide up to 200W to the BUC at 24V or 48V, as determined by the BUC PSU</i></p>	
<p><b>NOTE: The Q-Lite is also now also available as a <u>combined IF/L-band modem card</u> (same shape, size, dimensions) for immediate delivery. Please contact us for further details.</b></p>			
<b>Tx-only</b>		Transmit functions only	
<b>Rx-only</b>		Receive functions only	
<b>Data Rate</b>		<b>5Mbps data rate:</b> Extends base operation to 5Mbps	
		<b>10Mbps data rate:</b> Extends 5Mbps operation to 10Mbps	
		<b>25Mbps data rate:</b> Extends 10Mbps operation to 25Mbps	
		<b>60Mbps data rate:</b> Extends 25Mbps operation to 60Mbps	
		<b>100Mbps data rate:</b> Extends 60Mbps operation to 100Mbps (FastLink™, DVB-S2 & DVB-S2X only)	
		<b>200Mbps data rate:</b> Extends 100Mbps operation to 200Mbps (DVB-S2 & DVB-S2X only)	
		<b>345Mbps data rate:</b> Extends 200Mbps operation to 345Mbps (DVB-S2 & DVB-S2X only)	
<b>XStream IP™</b>		<b>Traffic Shaping:</b> Supports CIR/BIR/priority settings for IP streams classified by IP address, Diffserv class, IEEE 802.1p priority tag, MPLS EXP field, VLAN ID and MPEG2 transport stream PID	
		<b>Header Compression:</b> IP/UDP/TCP/RTP packet header compression (RFC 3095) plus Ethernet header compression	
		<b>Payload Compression:</b> TCP/UDP packet payload compression using the Deflate algorithm (RFC 1951)	
		<b>Dynamic Routing:</b> RIP, OSPF and BGP	
		<b>TCP Acceleration:</b> Up to 10,000 concurrent accelerated TCP connections to 100Mbps subject to prevailing data rate	
		<b>HTTP Acceleration:</b> Speeds up download of web pages to web browsers; includes DNS caching; <i>requires TCP acceleration to be on and the modem to be in routing mode</i>	
		<b>AES-256 Encryption:</b> <i>Please note that AES-256 Encryption (TCP/IP packet payload encryption using AES with 256-bit keys) is supported on the Q-LiteE™ model only. The Q-LiteE™ is identical to the standard Q-Lite™ in every other respect</i>	
<b>XStream IP™ DVB-S2X</b> <i>Provided as standard as part of DVB-S2/S2X option</i>		<b>IP-over-DVB Encapsulation:</b> Encapsulation of IP packets and Ethernet frames over DVB-S2/S2X using GSE, Paradise XStream™ Protocol (PXE), MPE or ULE	
		<b>ACM:</b> DVB-S2/S2X ACM (dynamic adjustment of outbound modcod to maximize data rate)	
		<b>VCM:</b> Allows either two ASI streams, or one ASI stream and one IP stream, to be multiplexed onto a single carrier; requires Quad ASI hardware option	
<b>DVB-S2X</b> <i>To 345Mbps subject to prevailing modem data rate limits</i>		<b>DVB-S2/S2X CCM Tx:</b> DVB-S2 QPSK, 8PSK, 16APSK & 32APSK Tx operation per EN 302 307-1. DVB-S2X QPSK, 8PSK, 8APSK, 16APSK, 32APSK & 64APSK Tx operation per EN 302 307-2. Includes 5%, 10%, 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2X, which comprises ACM, VCM and IP-over-DVB encapsulation	
		<b>DVB-S2/S2X CCM Rx:</b> Add-on card supporting DVB-S2 QPSK, 8PSK, 16APSK & 32APSK Rx operation per EN 302 307-1. DVB-S2X QPSK, 8PSK, 8APSK, 16APSK, 32APSK & 64APSK Rx operation per EN 302 307-2. Includes 5%, 10%, 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2X, which comprises ACM, VCM and IP-over-DVB decapsulation	

	Option	Description	Fully configurable - pay only for what you need!
<b>DVB-S2X Advanced Modulation</b>		128APSK, 256APSK, 256APSK-L <i>Note: available as a modulator option only</i>	
<b>FastLink™</b> Low-latency LDPC		Add-on card; includes BPSK, QPSK, OQPSK, 8PSK, 8QAM, 16APSK, 16QAM, 32APSK & 64QAM; to 100Mbps subject to prevailing modem data rate limits; includes 20%, 25% & 35% spectral roll-offs as standard	
<b>Paired Carrier+™</b>		<b>Paired Carrier+™ add-on card</b> (requires one or more options below)	
<i>Subject to prevailing modem data rate limits.</i>  <i>Occupied bandwidth: minimum 25kHz; maximum 72MHz</i>  <i>Paired Carrier+™ is also available as a low-cost 180-day license for light users (the license counts down only when Paired Carrier+™ is being actively used) - please contact Sales for details</i>		Paired Carrier+™ up to <b>256kbps</b> (requires Paired Carrier+™ add-on card)	
		Extends Paired Carrier+™ up to <b>512kbps</b>	
		Extends Paired Carrier+™ up to <b>1.024Mbps</b>	
		Extends Paired Carrier+™ up to <b>2.5Mbps</b>	
		Extends Paired Carrier+™ up to <b>5Mbps</b>	
		Extends Paired Carrier+™ up to <b>10Mbps</b>	
		Extends Paired Carrier+™ up to <b>15Mbps</b>	
		Extends Paired Carrier+™ up to <b>20Mbps</b>	
		Extends Paired Carrier+™ up to <b>25Mbps</b>	
		Extends Paired Carrier+™ up to <b>30Mbps</b>	
		Extends Paired Carrier+™ up to <b>40Mbps</b>	
		Extends Paired Carrier+™ up to <b>50Mbps</b>	
		Extends Paired Carrier+™ up to <b>60Mbps</b>	
		Extends Paired Carrier+™ up to <b>80Mbps</b>	
	Extends Paired Carrier+™ up to <b>100Mbps</b>		
	Extends Paired Carrier+™ up to <b>200Mbps</b>		
	Extends Paired Carrier+™ up to <b>345Mbps</b>		
<b>Terrestrial Interfaces</b> <i>(Please choose up to one option)</i>		<b>EIA-530:</b> D25 DCE supporting RS422/X.21/V.35/RS232	
		<b>Quad ASI:</b> 4xBNC 75Ω sockets; includes DVB-S/DSNG FEC (which can also be used with the IP terrestrial interface)	
<b>Utilities Card</b>		Add-on card size: 168mm x 104mm 9-way D type for 1:1 and 1:N redundancy (compatible with Q-NET PDQS Redundancy Switch) 15-way D type for alarms (4 independent Form C relays for unit, Tx, Rx and deferred alarms), Tx Inhibit signal and scalable DC voltage output for antenna pointing USB connector for software upgrades, etc. Second fan for environments where extra cooling is required FSK signalling	
<b>Antenna Pointing Card</b>		Smaller, lighter, lower power alternative to Utilities Card that provides AGC output for antenna pointing (along with Tx Inhibit and Rx Lock status) and serial RS232/RS485 M&C bus (alternative to Ethernet control). Scalable 0 to 10V DC output signal represents any of the following: <ul style="list-style-type: none"> <li>• Receive power level</li> <li>• Receive composite signal level</li> <li>• Demodulator AGC level</li> <li>• Eb/No</li> </ul>	
<b>Optimised Spectral Roll-off</b>		Extends the standard FastLink™, TPC & DVB-S/DSNG 35%, 25% and 20% roll-off factors to include 5%, 10% and 15% roll-offs	
<b>ClearLinQ™</b>		<b>Adaptive Tx Predistorter:</b> Corrects for linear & non-linear distortion in the RF chain (amplifier & transponder). Applicable to all FECs and modulations including DVB-S2/S2X, FastLink™ & TPC	
<b>DVB-CID</b>		<b>DVB Carrier ID:</b> Tx carrier identification per ETSI 103 129	
<b>Keypad/LCD Display</b>		Paradise standard front-panel membrane (local user interface) consisting of: LEDs that provide basic modem status; 3-line LCD display; keypad. The Q-Lite™ software will automatically detect and support the membrane when it is fitted	
<b>Fan</b>		Paradise standard modem fan: 20mm; 12V; 2.5W; 12.0 CFM; 65000 hour lifetime; connects to Q-Lite™ card; a second fan requires the Utilities card to be fitted	
<b>Conformal Coating</b>		Seals the PCB using a protective polymer coating that shields the electronics from moisture, salt and chemicals when operated in harsh environments	

Teledyne Paradise Datacom reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes. Refer to the website or contact Sales or Customer Support for the latest product information. The information contained herein is classified EAR99 under the U.S. Export Administration Regulations. The modem itself is classified ECCN 5A991.b.4 and is subject to U.S. Department of Commerce export control. Export re-export or diversion contrary to U.S. law is prohibited.