

LS24 2150P
LS242150P1FNB000
24-Way Passive Splitter (950-2150 MHz)


General Description:

The **LS242150P1FNB000** is a commercial quality 24-way passive splitter that meets strict level, match, and loss specifications achieved through the use of Quintech's proprietary microstrip and SMT technology. It operates over the 950-2150 MHz frequency range and enables the splitting of RF signals with repeatable performance over the entire frequency range and across all I/O ports. Output port 1 is power passing for LNB power from a satellite receiver. Since the DC paths are diode protected, LNB power is redundant if both paths are powered.

Note: All unused RF output ports must have 75 Ω terminations. A rear panel terminal is provided for external LNB power insertion.

Specifications:

| | |
|----------------------------|--------------------------------------|
| Frequency: | 950-2150 MHz |
| Impedance: | 75 Ω |
| Insertion Loss: | 21 ± 2 dB |
| Frequency Response: | ± 2 dB |
| Isolation: | 20 dB |
| Input Return Loss: | 10 dB |
| Output Return Loss: | 13 dB |
| RF Connectors: | Type F, 75 Ω |
| Mechanical: | 2 RU (3.5" H x 19" W x 14" D) |
| Weight: | 9.5 lbs. gross (boxed), 6.5 lbs. net |

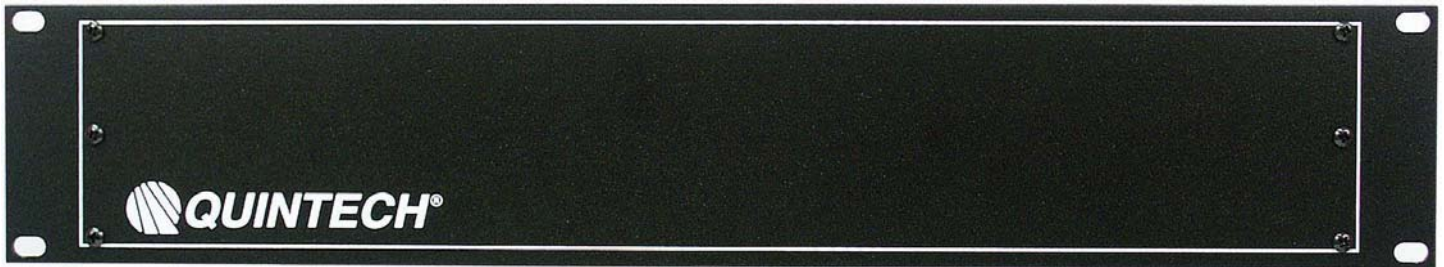

Buy Now!

