

LS48 2150A

LS482150A1FVC000

48-Way Active Splitter (950-2150MHz)

General Description:

The **LS482150A1FVC000** is a commercial quality 48-way splitter that meets strict level and match specifications achieved through the use of Quintech's proprietary microstrip and SMT technology. It operates over the 950-2150 MHz frequency range and permits signal splitting with zero loss, eliminating the need for external distribution amplifiers. The LS482150A1FVC000 provides LNB DC power insertion that can be switched on or off via the front panel mounted slide switch (see LNB Power specification below).



Note: All unused RF output ports must have 75 Ω terminations.

Specifications:

Frequency:	950-2150 MHz
Impedance:	75 Ω
P1dB:	-10 dBm
Insertion Loss:	0 \pm 2 dB
Frequency Response:	\pm 2 dB
Isolation:	18 dB
Input Return Loss:	12 dB
Output Return Loss:	12 dB
Noise Figure:	11 dB
RF Connectors:	Type F, 75 Ω
Power Requirements:	18-24V $\overline{=}$, @ 1A via 2-pin quick connect barrier strip
LNB Power:	18 V $\overline{=}$ (750 mA max. available for LNB power)
Power Consumption:	13 W (plus customer LNB power load)
Mechanical:	3 RU (5.25" H x 19" W x 20" D)
Weight:	15.4 lbs. gross (boxed), 9.4 lbs. net
Certifications:	CE

Buy Now!



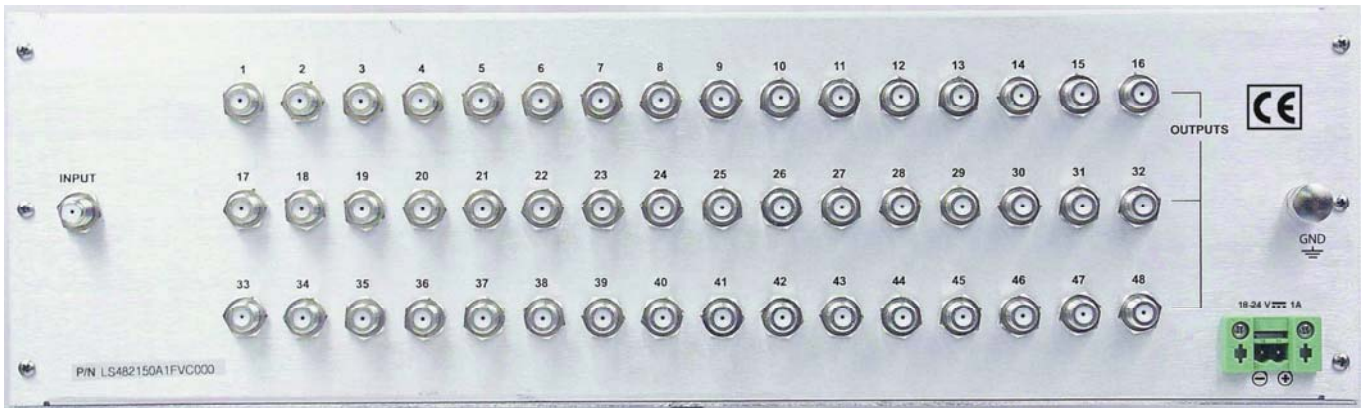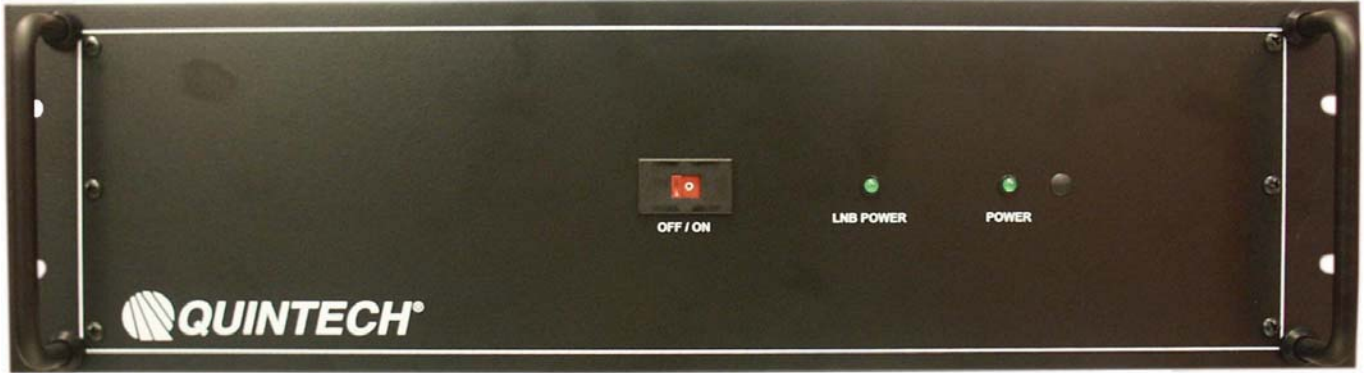

Digisat International Inc.
4195 W. New Haven Ave., Suite 15
Melbourne, FL 32904
USA
+1-321-676-5250
Email: sales@digisat.org
<http://www.digisat.org>