

PDL 070D

PDL13300070NZB000

L-Band to 70 MHz Data Grade Downconverter

General Description:

The **PDL13300070NZB000** is an ultra-stable frequency converter that translates a 1330 MHz L-Band channel to a 70 MHz IF channel. Based on Quintech's PLL stabilized fixed channel frequency converters, the PDL features a stability performance that meets the IESS 308/309 standard, and is suitable for current high speed data transmission rates and high order modulations.

Specifications:

Input Frequency:	1330 MHz, non-inverting
Output Bandwidth (-3dB):	36 MHz
Input Power Level:	-50 to -20 dBm
Overall Gain/Loss:	0 dB \pm 2 dB
Output Frequency:	70 MHz IF
L.O. Stability:	\pm 1 ppm
Input Return Loss:	10 dB
Output Return Loss:	14 dB
Spurious:	-50 dBc
Phase Noise:	Offset (Hz) (dBc/Hz)
	10 -58
	100 -72
	1,000 -73
	10,000 -76
	100,000 -100
	1,000,000 -110
Output Connector:	BNC, 75 Ω
Input Connector:	Type F, 75 Ω
Power Requirements:	100-240 V~, 50/60 Hz
Power Consumption:	17 W
Operating Temperature:	+10° to +60° C
Mechanical:	1 RU (1.75" H x 19" W x 12.5" D)
Weight:	7.5 lbs. gross (boxed), 5.0 lbs. net






Special Instructions:

To utilize the PDL13300070NZB000, connect a customer-specified L-Band channel to the “L-BAND” connector on the rear panel of the unit. The 70 MHz output will be present at the “70 MHz” connector, also on the rear panel.

NOTE: The PDL13300070NZB000 has been designed for indoor use only. Opening the unit will immediately void the warranty.

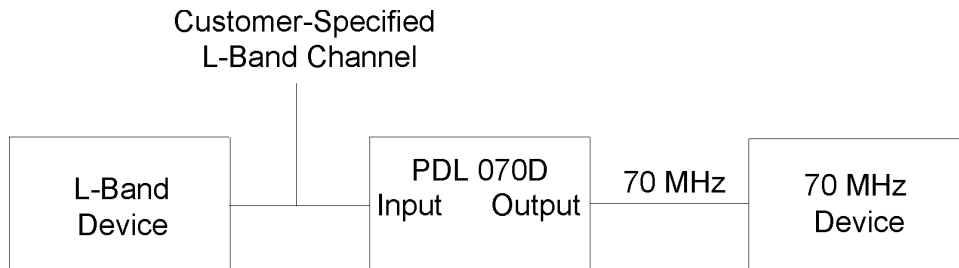

Digisat International Inc.
 4195 W. New Haven Ave., Suite 15
 Melbourne, FL 32904
 USA
 +1-321-676-5250
 Email: sales@digisat.org
<http://www.digisat.org>